
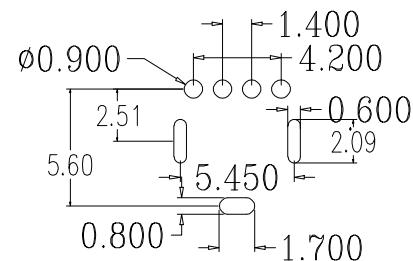


弯脚开口7.0MM

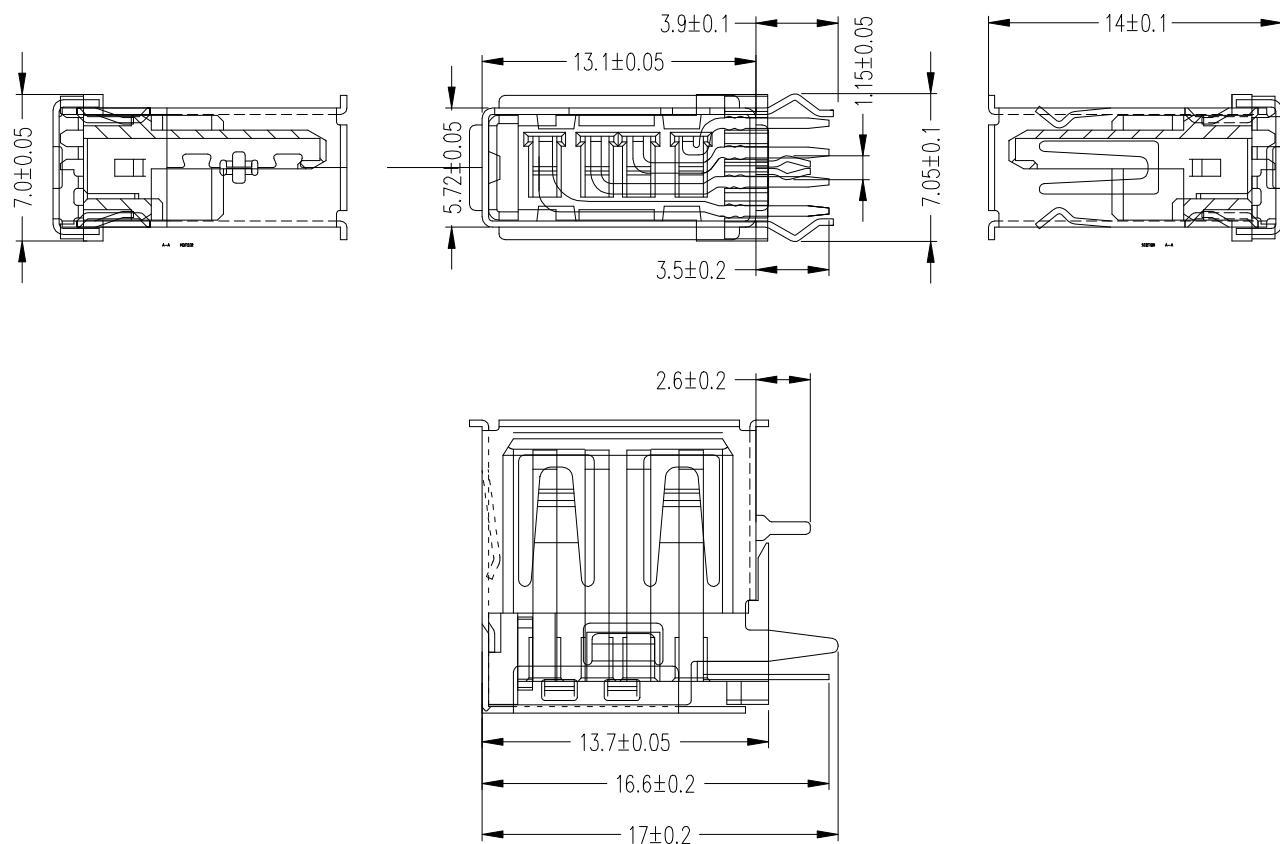

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levol
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.75kgf (MAX)
Unmate force:1.02kgf (MIN)
- 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Material:

- 塑胶:Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PBT/LCP White/Black
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 外壳:Shell:
Nickel Plating

深圳市金航标电子有限公司

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)	2016.11.22	○
设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED
审核 (CHECKED)		X. X ± 0.30 X. XX ± 0.20 X. XXX ± 0.10 X* $\pm 5^\circ$ X. X* $\pm 2^\circ$
核准 (APPROVED)		