
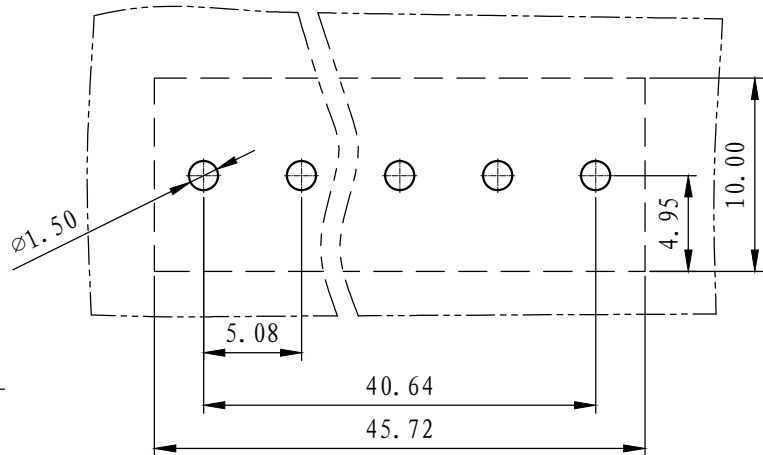
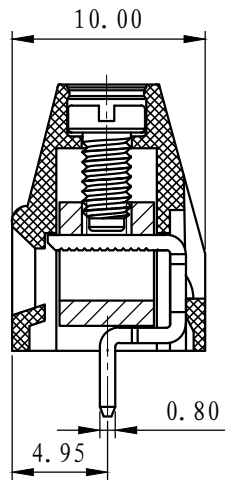
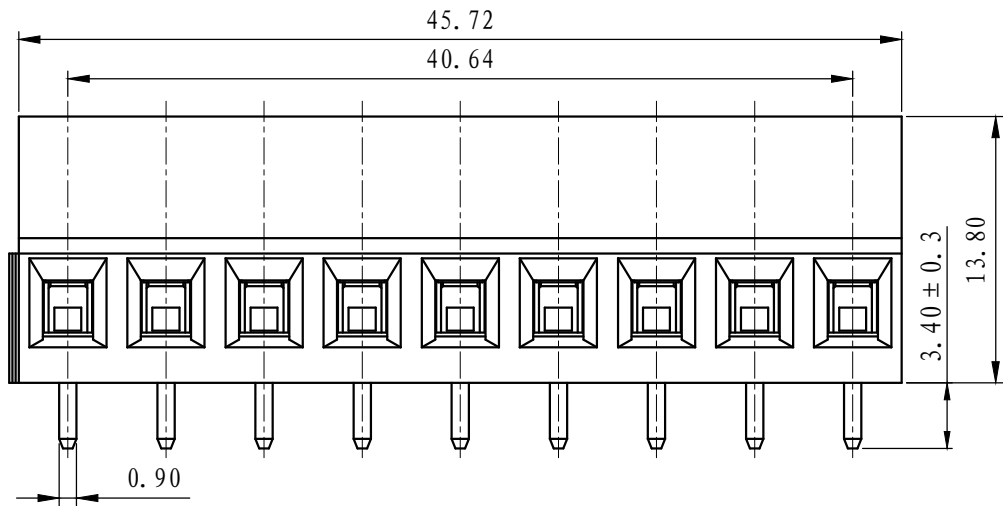


| REVISION RECORD |         |      |      |
|-----------------|---------|------|------|
| REV.            | CONTENT | MOD. | DATE |
| △               | 初版发行    |      |      |

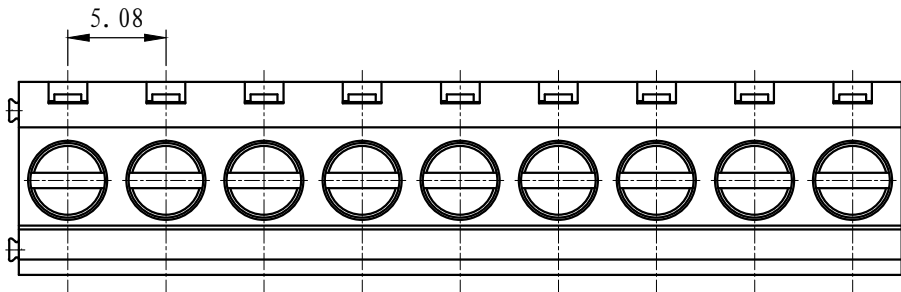

NOTES:

1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance:500MΩ or more at DC500V
5. Using Temperature Range: -40° C~+105° C
6. Suitable Electric Wire:26-12AWG
7. Screw Torque Value: 0.4 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 10A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗: 500兆欧/DC 500V
5. 使用条件: -40° - +105°
6. 适用线规: 26-12AWG
7. 螺丝扭力: 0.4 N.m

|                | pitch dimension |        |         | Nominal dimension |         |         |          |          | —<br>/  |
|----------------|-----------------|--------|---------|-------------------|---------|---------|----------|----------|---------|
|                | over 0          | over 6 | over 10 | over 0            | over 30 | over 60 | over 100 | over 150 |         |
| variable range | to 6            | to 10  | to 24   | to 30             | to 60   | to 100  | to 150   |          |         |
| Tolerance      | ±0.1            | ±0.15  | ±0.25   | ±0.2              | ±0.3    | ±0.5    | ±0.7     | ±1.0     | 0.05/10 |

|                                                 |                    |                 |       |          |                                              |
|-------------------------------------------------|--------------------|-----------------|-------|----------|----------------------------------------------|
| 4.                                              | LC1-系列-耳朵螺丝        | SP0YA255101V    | P     | 碳钢       | 三价铬钝化彩锌                                      |
| 3.                                              | LG128-铜方块          | F1A0BLG1283V    | P     | 黄铜       | 镀镍                                           |
| 2.                                              | LG128V-焊脚          | 2013B0001AV     | P     | 黄铜       | 镀雾锡                                          |
| 1.                                              | LG128-5.08-本体(带拼接) | 2020A0YXXAVP    | 1     | PA66-V0  |                                              |
| NO.                                             | NAME OF PART       | NO. OF PART     | Q' TY | MATERIAL | NOTES                                        |
| DES.                                            | ARKINE             | DATE 2011/03/11 | UNITS | MM       | THIRD ANGLE PROJECTION                       |
| CHK.                                            | DATE               | SIZE            | A4    |          | 1 of 1                                       |
| APP.                                            | DATE               | SCALE           | 1:1   | DWG NO.  | REV:V0                                       |
| 上海联捷电气有限公司<br>Shanghai Elinker Electric C.O,LTD |                    |                 |       | TITLE    | LG128V-5.08-9P-1Y-00A<br>LG128V-5.08-成品(带拼接) |