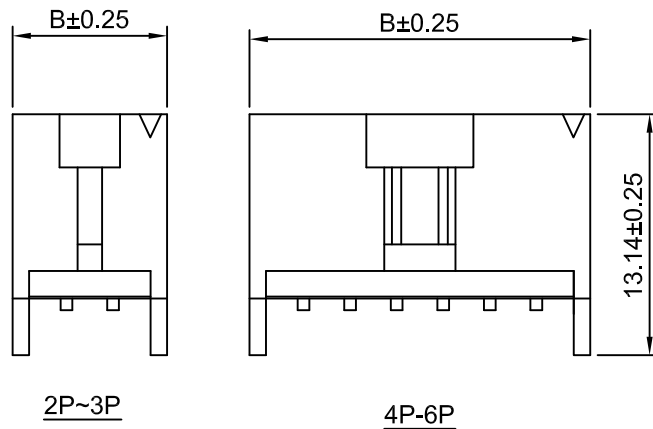

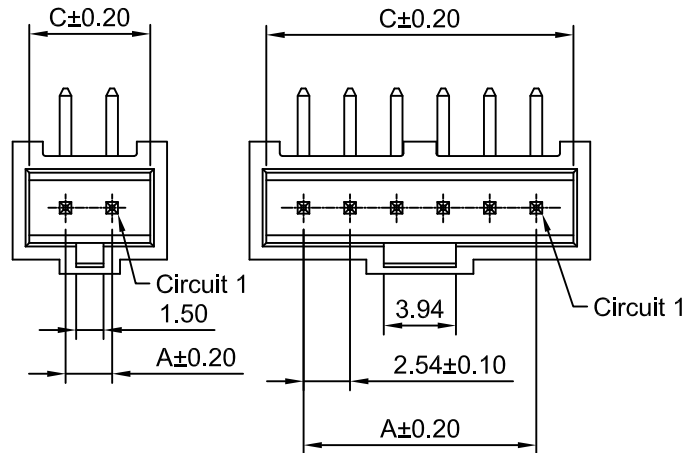



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.54	8.43	6.60	18P	43.18	49.07	47.24
3P	5.08	10.97	9.14	19P	45.72	51.61	49.78
4P	7.62	13.51	11.68	20P	48.26	54.15	52.32
5P	10.16	16.05	14.22	21P	50.80	56.69	54.86
6P	12.70	18.59	16.76	22P	53.34	59.23	57.40
7P	15.24	21.13	19.30	23P	55.88	61.77	59.94
8P	17.78	23.67	21.84	24P	58.42	64.31	62.48
9P	20.32	26.21	24.38	25P	60.96	66.85	65.02
10P	22.86	28.75	26.92	26P	63.50	69.39	67.56
11P	25.40	31.29	29.46	27P	66.04	71.93	70.10
12P	27.94	33.83	32.00	28P	68.58	74.47	72.64
13P	30.48	36.37	34.54	29P	71.12	77.01	75.18
14P	33.02	38.91	37.08	30P	73.66	79.55	77.72
15P	35.56	41.45	39.62	31P	76.20	82.09	80.26
16P	38.10	43.99	42.16	32P	78.74	84.63	82.80
17P	40.64	46.53	44.70				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		2.5:1		1 of 1			
DRAWN		CHK'D		APPR		2.54mm Pitch Right angle Wafer	
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION			
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°							
DRAWING NO.				REV			
A2547WRB-XP				A1			

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°



A1