

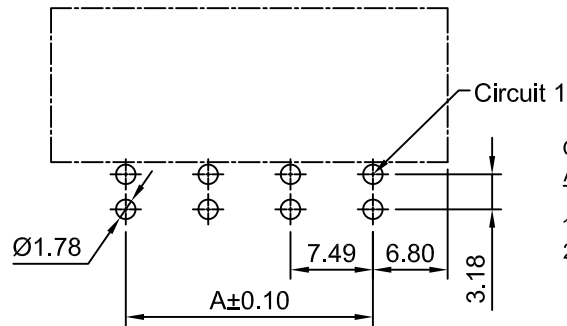
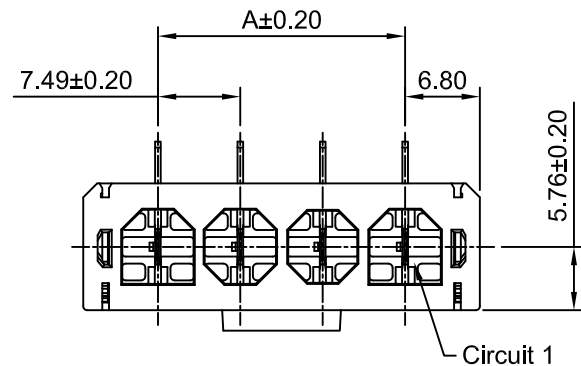



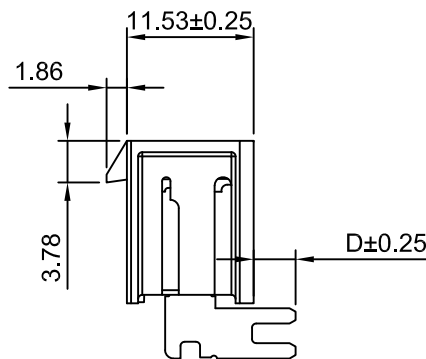

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

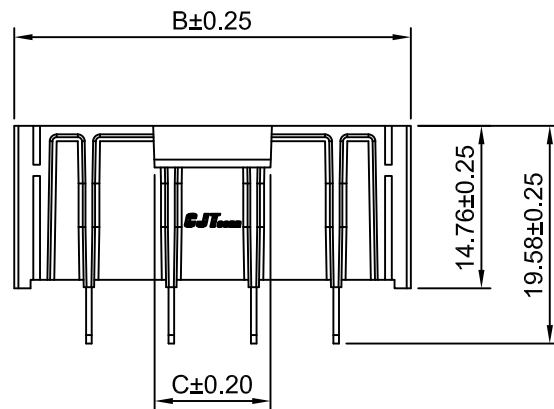

Ordering Information:

A7501WRB-XP - **
1 2

1. Part No.

2. Size D:

(Blank): D=3.81mm

D53: D=5.33mm

SPECIFICATIONS:

Current Rating: 18A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Solder Tabs: Brass/Gold over Nickel

Material: LCP, UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2P	7.49	21.08	3.05	5P	29.96	43.56	10.54
3P	14.98	28.58	3.05	6P	37.45	51.05	10.54
4P	22.47	36.07	10.54	8P	44.94	66.04	10.54

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

	Unit	Scale	Sheet	TITLE 7.49MM PITCH RIGHT-ANGLE WAFER	
	mm	1.5:1	1 of 1		
	DRWN	CHK'D	APPR		
	Chengbiao Ye	Diankui Wan	Jack Yin		
4	General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. A7501WRB-XP
2	x.xx±0.25				
7	x.xxx±0.15 ANGLES ±1°				
					REV A2

A2	CHANGE THE DRAWING	2023.04.04
A1	CHANGE THE DRAWING	2021.04.02
A0	NEW RELEASE	2019.12.17
REV	DESCRIPTION	DATE