




Terminals & Splices > Quick Disconnects

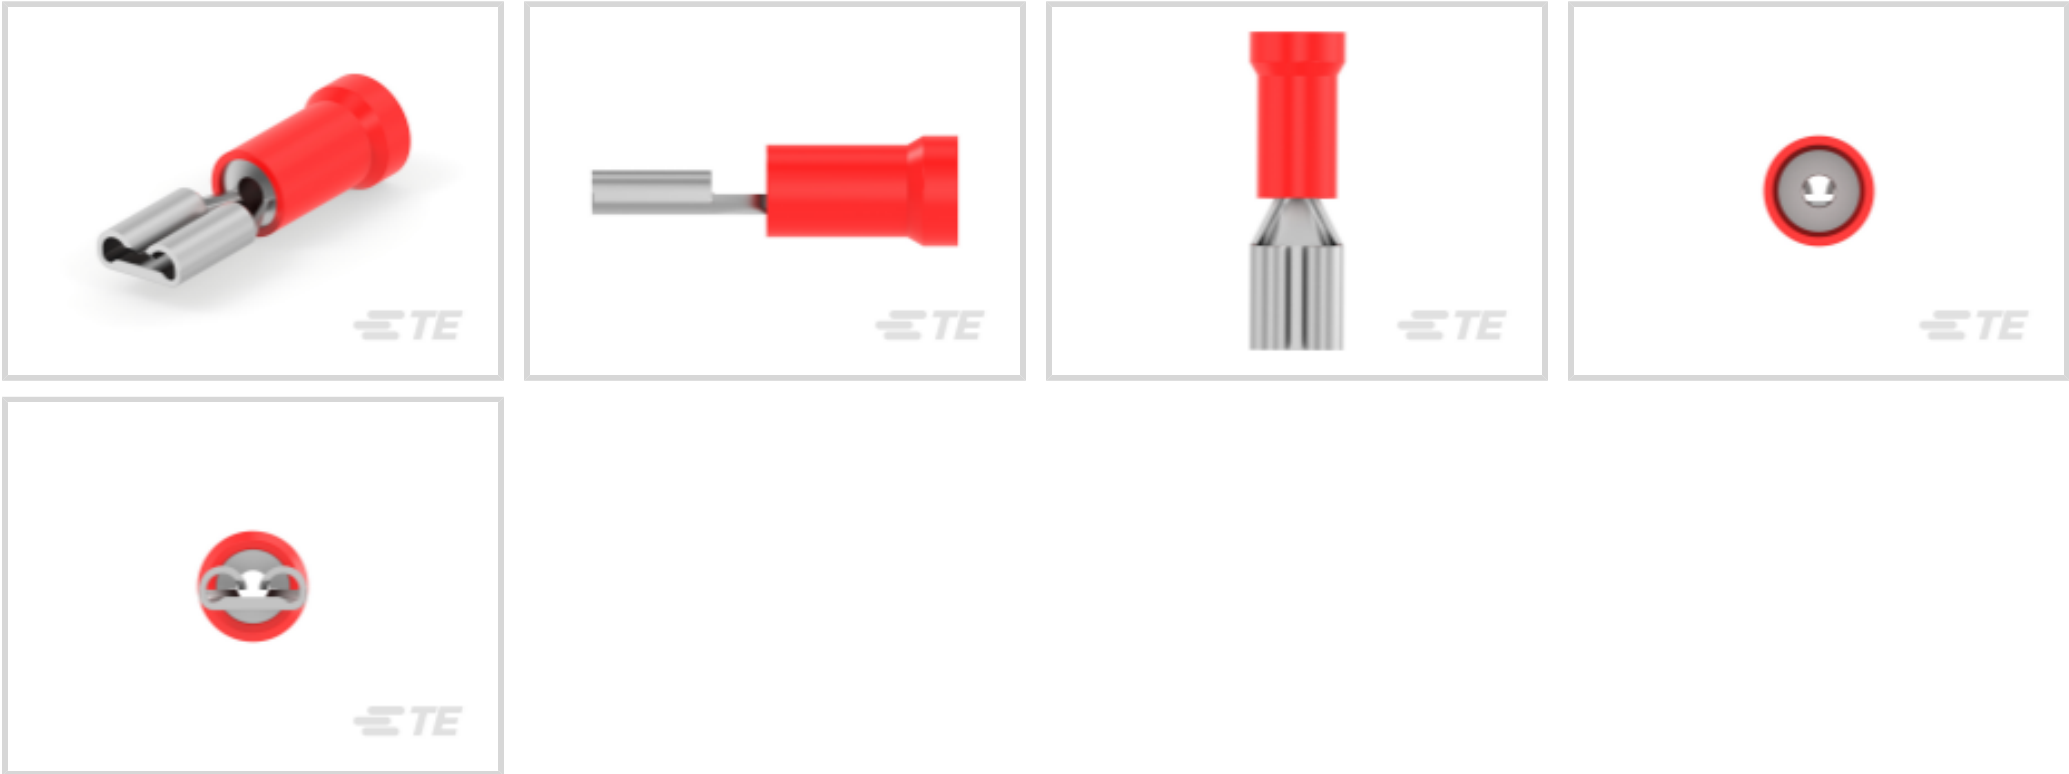

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **592 – 3260 CMA**

Mating Tab Width: **4.8 mm [.189 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
---------------------	--------

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.8 mm[.189 in]
Mating Tab Thickness	.8 mm[.031 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	Compression



Barrel Type	Closed
-------------	--------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Product Length	20.88 mm[.822 in]
Compatible Insulation Diameter Range	3.56 mm[.14 in]
Wire Size	592 – 3260 CMA

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Packaging Features

Packaging Quantity	1000
Packaging Method	Loose Piece

Other

Barrel Color	Red
--------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 REPRESENTATION ONLY TE Part # 47386-4 DAHT PG PIDG 26-16 ASSY	 1221 014 58423-1-0 AMP 58423-1-0 TE Part # 58423-1 DIE, RBY IS9252	 TE Part # 2323802-3 SSRMP-240D10 = Mini Puck,10A,240V AC	 TE Part # 2323802-9 SSRMP-240D10R = Mini Puck,10A, 240V AC,R
 TE Part # 2323802-2 SSRMP-240D16 = Mini Puck,16A,240V AC	 TE Part # 2323802-1 SSRMP-240D25 = Mini Puck,25A,240V AC	 TE Part # 1-2323802-3 SSRMP-480D10R = Mini Puck,10A, 480V AC,R	 TE Part # 2323802-5 SSRMP-480D16 = Mini Puck,16A,480V AC
 TE Part # 1-2323802-2 SSRMP-480D16R = Mini Puck,16A, 480V AC,R	 TE Part # 2323802-4 SSRMP-480D25 = Mini Puck,25A,480V AC	 TE Part # 58433-3 PRO CR ASSY, RBY IS9252	 REPRESENTATION ONLY TE Part # 525690 DAHT PG PIDG 20-18 ASSY
 TE Part # 539691-2 ERGO DIE R.B.Y	 REPRESENTATION ONLY TE Part # 90035-3 DAHT PIDG FASTON 22-18 ASSY	 TE Part # 2323802-8 SSRMP-240D16R = Mini Puck,16A, 240V AC,R	 TE Part # 2323802-7 SSRMP-240D25R = Mini Puck,25A, 240V AC,R



TE Part # 2323802-6
SSRMP-480D10 = Mini Puck, 10A, 480V AC

TE Part # 1-2323802-1
SSRMP SERIES, Mini Puk, 25A, 480VAC, R-DC I/P

TE Part # 169400
CERTI-LOK FRAME W/O DIES

TE Part # 2392021-2
RED BATTERY DAHT KIT 220V (47689-4)

Customers Also Bought

TE Part #163092-2
.062 DIA SOCKET ASSY 3+ (LP)

TE Part #745255-2
SPRING LATCH 2/BAG

TE Part #61060-2
RECEPT, PIDG FASTON 22-18 110

TE Part #171505-1
PIDG RING UL.CSA(22-18)

TE Part #2-1625868-8
RP 2A 0.25W 10R2 0.1% 25PPM 1K RL

TE Part #6-2176397-0
3502 300R 1%

TE Part #F26778-000
ST58-5-00

TE Part #345485-1
BODY CLIP HOUSING DUAL

TE Part #4-1437622-7
KN500B1/8=KNOB BLK KNURL 1/8 S

TE Part #1SNA115147R1600
M120/35.F

Documents

Product Drawings

187 PIDG FASTON REC

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_9-160483-5_J.2d_dxf.zip



English

Customer View Model

[ENG_CVM_9-160483-5_J.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_9-160483-5_J.3d_stp.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_9-160483-5_L.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-160483-5_L.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-160483-5_L.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Environmental Compliance

[MD_9-160483-5_0622201698_dmtec](#)

English

[MD_9-160483-5_0622201698_dmtec](#)

English