
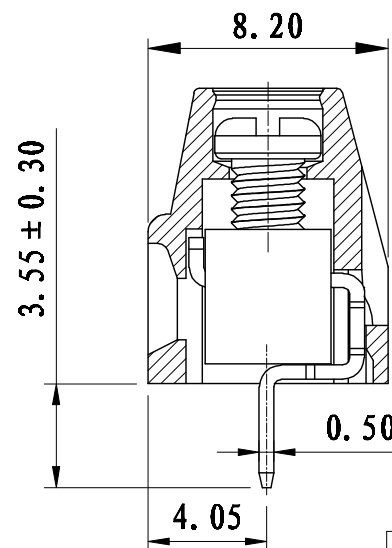
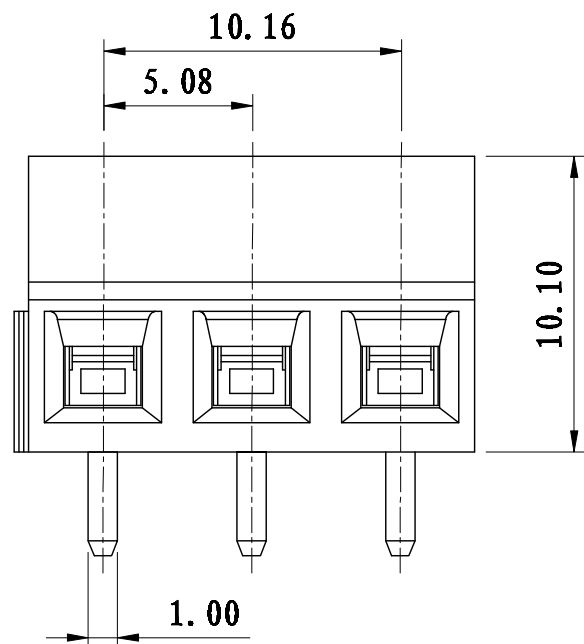
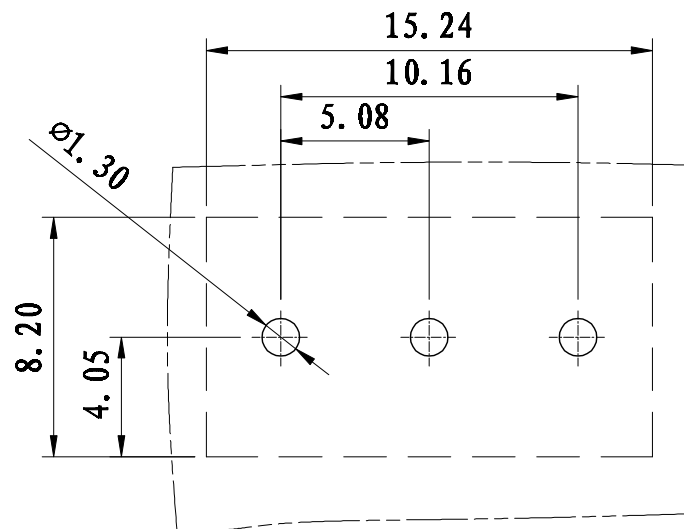


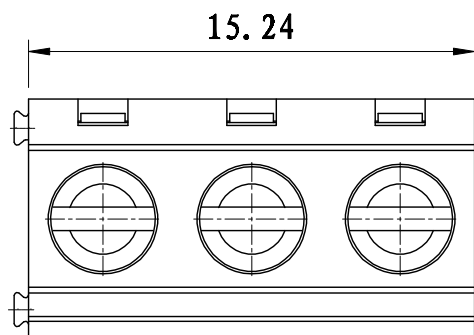

REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
0	初版发行	ARKINE	

NOTES:

1. Voltage Rating: 300V, Current Rating: 8A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 26-16AWG
7. Screw Torque Value: 0.4 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 8A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 26-16AWG
7. 螺丝扭力: 0.4 N.m

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4.	LG127V-焊脚	2004B0001AV	P	黄铜	镀锡
3.	LG127-铜方块	F1A0BLG1273V	P	黄铜	镀镍
2.	LG127-螺丝	SP0YA253701V	P	碳钢	三价铬钝化彩锌
1.	LG127-5.08-本体	2023A4YXXAV-P	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2011/03/02	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-2004001	REV: V0
TITLE				LG127V-5.08-3P-1Y-00A	
				LG127V-5.08-成品	



上海联捷电气有限公司
Shanghai Hlinker Electric Co., Ltd