
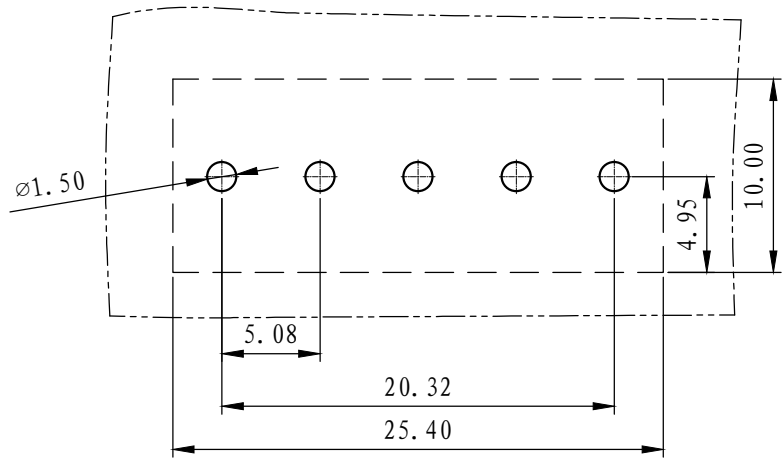
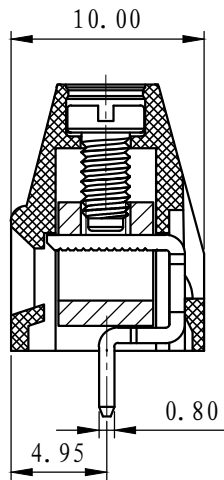
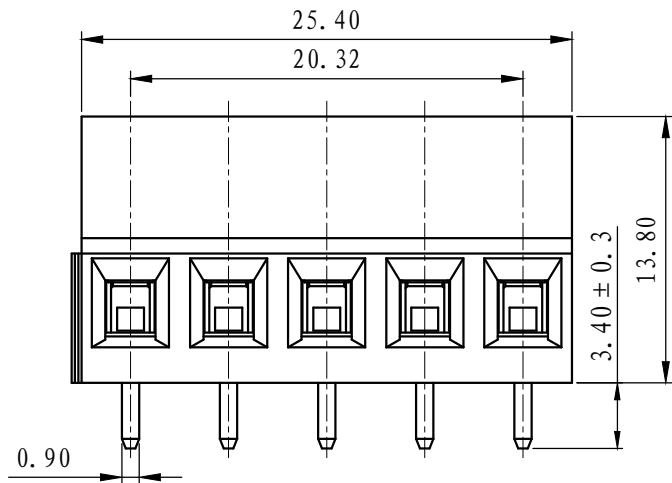


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

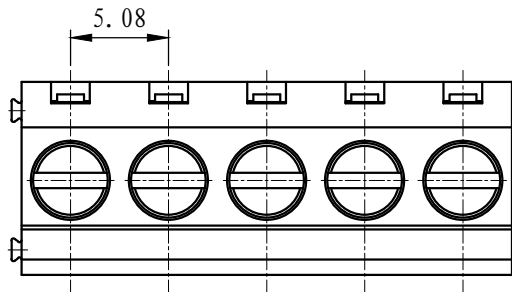

NOTES:

1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance:500MΩ or more at DC500V
5. Using Temperature Range: -40° C~+105° C
6. Suitable Electric Wire:26-12AWG
7. Screw Torque Value: 0.4 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 10A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗: 500兆欧/DC 500V
5. 使用条件: -40° - +105°
6. 适用线规: 26-12AWG
7. 螺丝扭力: 0.4 N.m

	pitch dimension			Nominal dimension					— ▧ ⌒
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4.	LC1-系列-耳朵螺丝	SP0YA255101V	P	碳钢	三价铬钝化彩锌
3.	LG128-铜方块	F1A0BLG1283V	P	黄铜	镀镍
2.	LG128V-焊脚	2013B0001AV	P	黄铜	镀雾锡
1.	LG128-5.08-本体(带拼接)	2020A0YXXAVP	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE 2011/03/11	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-2020002 REV:V0
上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD				TITLE	LG128V-5.08-5P-1Y-00A LG128V-5.08-成品(带拼接)