

LT-Series Toggle Switches



The LT-Series illuminated toggle switches feature a three-color lighting sequence from a single lamp. These lighted toggles contain neoprene bushing seals for dust and moisture protection and provide a simple way to dress-up most any Marine or Transportation industry panel. A variety of circuits and terminations are available.

Dielectric Strength

1000V-live to dead metal parts

Electrical Life


50,000 cycles- maintained
25,000 cycles- momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

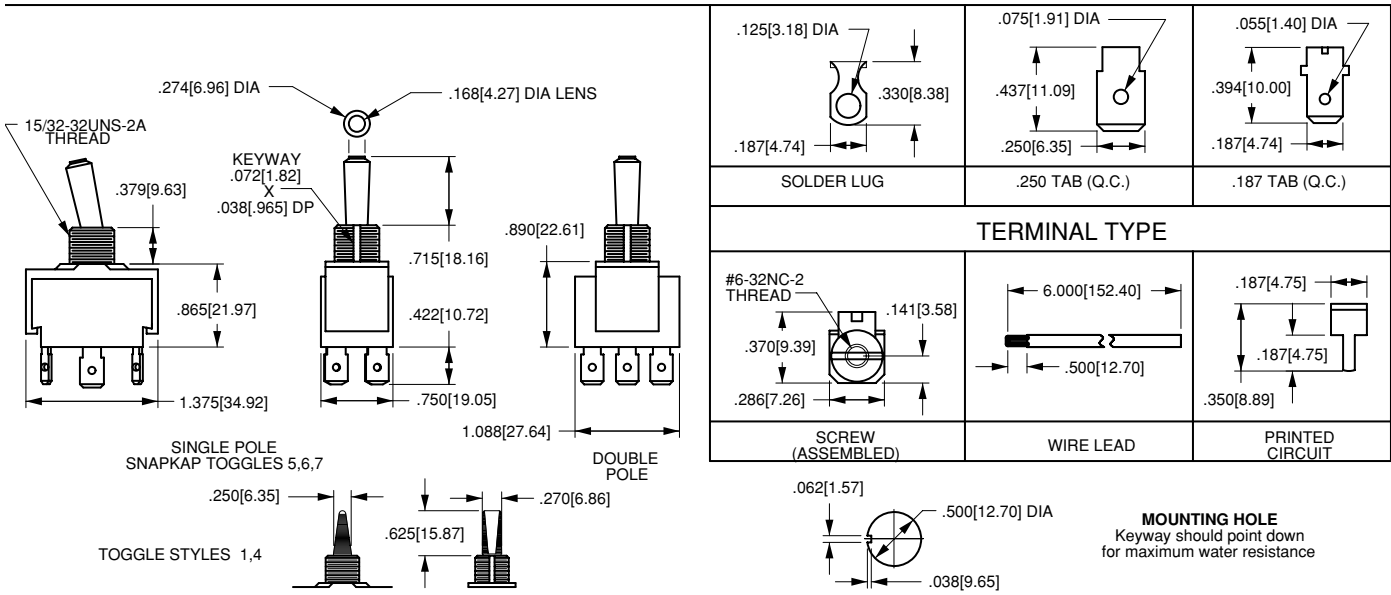

LT-1561 - 1 30 - 012

1 Base Part Number

2 Actuator Style

3 Lighting Sequence

4 Lamp Voltage

1 BASE PART NUMBER: SERIES/POLES/ILLUMINATION/CIRCUITRY ³ /RATING/TERMINATION ⁵								3 LIGHTING SEQUENCE ^{3,4}			
10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 15A 15-28VDC								position 1	position 2	position 3	
Single Pole in Double Pole base				Double Pole							
solder lug	.250 tab	screw term.	wire leads	solder lug	.250 tab	screw term.	wire leads				
LT-1510	LT-1511	LT-1514	LT-1515	ON-NONE-OFF	LT-2510	LT-2511	LT-2514	LT-2515	01 red	red	red
LT-1520	LT-1521	LT-1524	LT-1525	ON-NONE-(OFF)	LT-2520	LT-2521	LT-2524	LT-2525	02 amber	amber	amber
LT-1530	LT-1531	LT-1534	LT-1535	(ON)-NONE-OFF	LT-2530	LT-2531	LT-2534	LT-2535	03 green	green	green
LT-1540	LT-1541	LT-1544	LT-1545	ON-NONE-ON	LT-2540	LT-2541	LT-2544	LT-2545	10 red	---	none
LT-1550	LT-1551	LT-1554	LT-1555	ON-NONE-(ON)	LT-2550	LT-2551	LT-2554	LT-2555	11 red	clear	red
LT-1560	LT-1561	LT-1564	LT-1565	ON-OFF-ON	LT-2560	LT-2561	LT-2564	LT-2565	12 red	clear	amber
LT-1570	LT-1571	LT-1574	LT-1575	ON-OFF-(ON)	LT-2570	LT-2571	LT-2574	LT-2575	13 red	clear	green
LT-1580	LT-1581	LT-1584	LT-1585	(ON)-OFF-(ON)	LT-2580	LT-2581	LT-2584	LT-2585	14 red	clear	blue
									15 red	clear	clear
									20 amber	---	none
									21 amber	clear	red
									22 amber	clear	amber
									23 amber	clear	green
									24 amber	clear	blue
									25 amber	clear	clear
									30 green	---	none
									31 green	clear	red
									32 green	clear	amber
									33 green	clear	green
									34 green	clear	blue
									35 green	clear	clear
									40 blue	---	none
									41 blue	clear	red
									42 blue	clear	amber
									43 blue	clear	green
									44 blue	clear	blue
									45 blue	clear	clear
									50 clear	---	none
									51 clear	clear	red
									52 clear	clear	amber
									53 clear	clear	green
									54 clear	clear	blue
									55 clear	clear	clear

2 ACTUATOR STYLE			snapkap style ²		
paddle ¹					
1	clear paddle		5	bright chrome	
4	solid color paddle		6	satın chrome	
			7	black molded	

- NOTES
- 1 Solid color paddle available with lighting sequence 01, 02, 10 or 20.
 - 2 SnapKap Toggle Lenses are available separately. Consult factory.
 - 3 Independent lamp is standard. Dependent lamp with ON-OFF function (including momentary) is available with Lighting Sequences 10, 20, 30, 40 and 50. (No light in OFF position.)
 - 4 Green and blue not recommended with 125 volt or 250 volt neon lamps.
 - 5 Additional terminations available. Consult factory for details.
 - () Indicates momentary function.

4 LAMP VOLTAGE ⁶		incandescent	
neon		006 6 volts	
125	125 volts neon	012	12 volts
250	250 volts	018	18 volts
		024	24 volts