
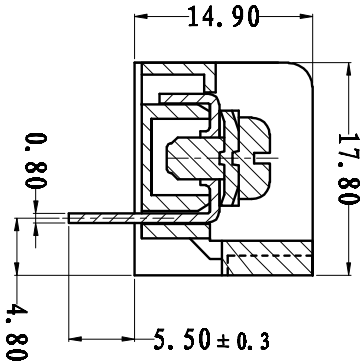
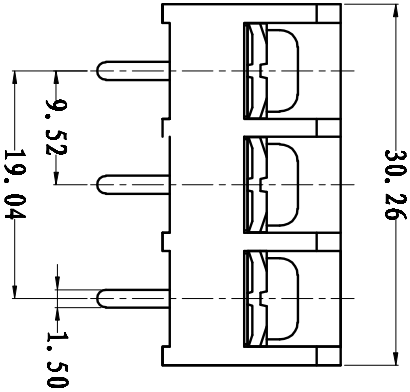
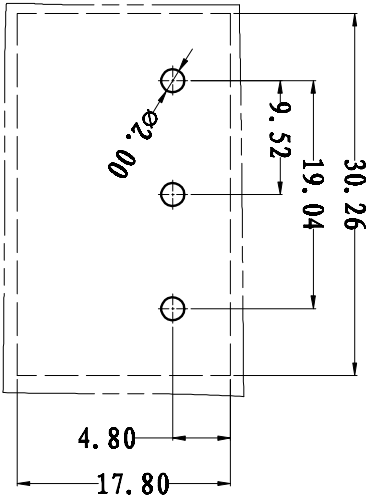


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

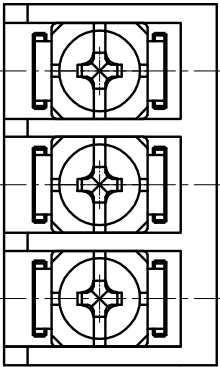

NOTES:

1. Voltage Rating: 300V, Current Rating: 20A
2. PITCH: 9.52mm
3. Insulation Withstands Voltage: AC250V/min
4. Insulation Resistance: 50MΩ or more at DC1000V
5. Using Temperature Range: -40° C ~ +130° C
6. Suitable Electric Wire: 22-12AWG
7. Screw Torque Value: 0.8 Nm

技术要求:

- 1.额定电压: 300V, 额定电流: 20A
- 2.间距: 9.52mm
- 3.对电压值: AC 250V/min
- 4.绝缘电阻: 50MΩ及以上
- 5.使用条件: -40° ~ +130°
- 6.适用线规: 22-12AWG
- 7.螺丝扭力: 0.8Nm

	pitch dimension			Nominal dimension			
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150
variable range	6	10	24	30	60	100	150
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±1.0

3	M3.5*6-8*8	SPFEA356051V	P	碳钢	三价铬钝化彩锌
2	LN3-9.52焊种	5005B0001AY	P	黄铜	镀黑锡
1	LN3-9.52本体	5005A001XAY	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/06/18	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1: 1
				DWG NO.	SP-2-5005003
				TITLE	LN3B-9.52-3P-11-00A
					LN3B-9.52-成品