

RAYCHEM | RAYCHEM SCL

TE Internal #: NB25922001

Black, 3:1, Dual Wall Tubing, Shrinks To .313 in [7.95 mm], Irradiated Modified Polyolefin, .75 in [19.05 mm] Inner Diameter,

RAYCHEM SCL

View on TE.com >



Heat Shrink Tubing > SCL Heat Shrink Tubing







Primary Product Color: Black

Wall Type: Dual Wall

Expanded Inside Diameter (Min): 19.05 mm [.75 in] Recovered Inside Diameter (Max): 7.95 mm [.313 in]

Shrink Ratio: 3:1

All SCL Heat Shrink Tubing (40)

Features

Product Type Features	
Wall Type	Dual Wall
Electrical Characteristics	
Operating Voltage (Max)	.6 kV
Body Features	
Fluid Type	Aviation Fuel, Brake Fluid, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	3:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Rigid
Dimensions	
Recovered Wall Thickness (Tolerance)	.35 mm[.014 in]
Recovered Wall Thickness (Nominal)	1.65 mm[.065 in]
Product Length	1220 mm[48.03 in]
Expanded Inside Diameter (Min)	19.05 mm[.75 in]
Recovered Inside Diameter (Max)	7.95 mm[.313 in]



Tubing Size Range	7.95 – 19.05 mm[.313 – .75 in]
-------------------	--------------------------------

Usage Conditions

Shrink Temperature (Min)	125 °C
Resistance Properties	Immersion Protection, Moisture, Splash Protection
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-55 – 110 °C
Recovery Temperature	135 °C

Operation/Application

Mechanical Resistance	Abrasion, Fluids, Mechanical Damage,
	Strain Relief, Vibration

Product Availability

Packaging Features

Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | RAYCHEM SCL

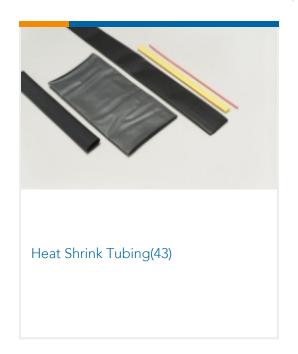

Customers Also Bought













TE Part #ABC03N-22P-6210 IN-LINE RECP



TE Part #ABC06N-22S-6210 IN-LINE PLUG



TE Part #NB25942001 SCL-1-0-STK

TE Part #72531-21-41PA
HERM RECP

Documents

Product Drawings

SCL-3/4-0-STK

English

SCL-3/4-0-STK

English

Datasheets & Catalog Pages

SCL Pages from 9-1773447-9

English

Product Specifications

Quality Specification

English