

## Summary

[Request a quote](#)[See video assembly instructions](#)

Low Voltage	3
Wire Size/AWG	28 - 20
Gender	Standard
Plug	Plug - Straight
Locking system	Push-pull
Jacket cable outside diameter [mm]	4.30 - 5.20 mm
Matching parts	<a href="#">EGG.0B.303.CLL</a>
Series	B - Indoor keyed

## Technical details

[https://www.lemo.com/int\\_en/solutions/originals/b-indoor-keyed/fgg-0b-303-clad52.html](https://www.lemo.com/int_en/solutions/originals/b-indoor-keyed/fgg-0b-303-clad52.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Electrical Configuration

Termination Low voltage	Solder
R (max)	4.8 mOhm
Insert configuration value	0B.303 - 3 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated current	8 Amps
Vtest (contact-contact)	1200 V (AC), 1700 V (DC)
Vtest (contact-shell)	900 V (AC), 1270 V (DC)
Contact Type	Solder
Max. Solid Conductor	0.56 mm <sup>2</sup> (AWG 20)
Max. Stranded Conductor	0.56 mm <sup>2</sup> (AWG 20)
Bucket Dia.	1.0 mm (0.039in)
Contact Dia.	0.9 mm (0.035in)
Low Voltage	3
Wire Size/AWG	28 - 20
Gender	Standard

## Form & Material

Shell style / Model id	FG - Straight plug, cable collet
Plug	Straight
Housing material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Locking system	Push-pull
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Weight	8.3 g



## Environment

Technical domain	Audio Video, Energy and Industrial, Medical, Semiconductor, Specialties and Other, Test and Measurement, Transportation, Aerospace and UAV
Environmental protection	IP50
Temp (min / max)	-55°C / +250°C
Climatical Category	50/175/21
Humidity (max)	<=95% [at 60 deg C /140 F]
Shielding (min)	75 dB (10 MHz)
Shielding (min)	40 dB (1 GHz)
Shock Resistance	100 g [ 6 ms]
Vibration	15 g [10 Hz - 2000 Hz]
Salt Spray Corrosion	>1000 hr

## Cable fixation

Cable termination protection	Standard back nut (no additional protection)
Fixation type	Cable collet
Jacket cable outside diameter [mm]	4.30 - 5.20 mm

## Drawings

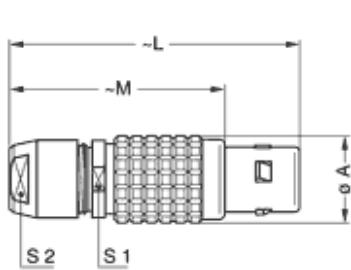

## Dimensions

	<b>L</b>	<b>A</b>	<b>S2</b>	<b>M</b>	<b>S1</b>
mm.	36	9.5	7	26	8
in.	1.42	0.37	0.28	1.02	0.31

[https://www.lemo.com/int\\_en/solutions/originals/b-indoor-keyed/fgg-0b-303-clad52.html](https://www.lemo.com/int_en/solutions/originals/b-indoor-keyed/fgg-0b-303-clad52.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Recommended By Lemo

## Accessories

---

Compatible cap	BFG.0B.100.PCSG
----------------	-----------------

## Tools

---

Spanner wrench	DCD.0B.ZZZ.PA070
----------------	------------------

# Cables

Cable PartNumber	Material	Colour	Cable image
130240	PVC	Black	
130250	PVC	Grey	
30260	PVC	Black	
3220	PVC	Black	
60080	PVC	Grey	

[https://www.lemo.com/int\\_en/solutions/originals/b-indoor-keyed/fgg-0b-303-clad52.html](https://www.lemo.com/int_en/solutions/originals/b-indoor-keyed/fgg-0b-303-clad52.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.