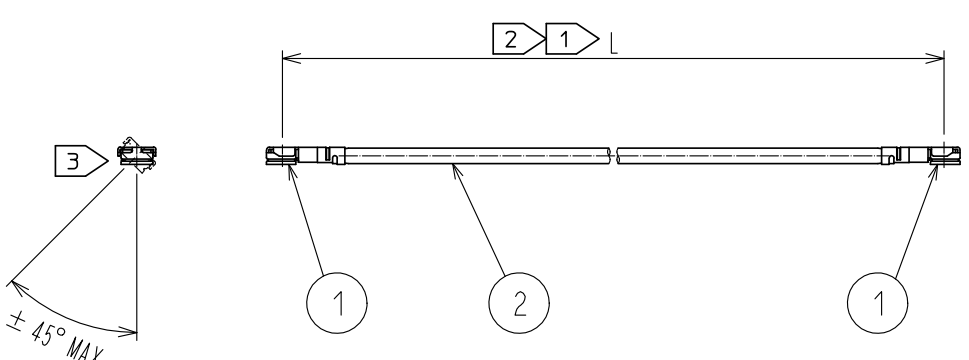
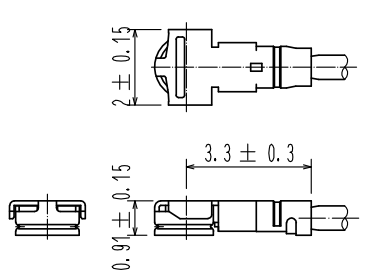





1	2	3	4																																											
A				A																																										
B	<table border="1" data-bbox="1037 627 1340 761"><thead><tr><th>Part No.</th><th>Cable color</th></tr></thead><tbody><tr><td>~04*1TV~</td><td>WHITE</td></tr><tr><td>~04*2TV~</td><td>BLACK</td></tr></tbody></table>			Part No.	Cable color	~04*1TV~	WHITE	~04*2TV~	BLACK	B																																				
Part No.	Cable color																																													
~04*1TV~	WHITE																																													
~04*2TV~	BLACK																																													
C	<p>NOTE 1 We indicate the length of the harness on the last of product name, 'L' part.</p> <p>2 Tolerance for [L]</p> <table border="1" data-bbox="446 1030 1069 1232"><thead><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr></thead><tbody><tr><td>$35 \leq L \leq 200$</td><td>± 4</td></tr><tr><td>$200 < L \leq 500$</td><td>± 8</td></tr><tr><td>$500 < L \leq 1000$</td><td>± 12</td></tr><tr><td>$1000 < L$</td><td>$\pm 1.5\%$</td></tr></tbody></table>			Length L [mm]	Tolerance [mm]	$35 \leq L \leq 200$	± 4	$200 < L \leq 500$	± 8	$500 < L \leq 1000$	± 12	$1000 < L$	$\pm 1.5\%$	C																																
Length L [mm]	Tolerance [mm]																																													
$35 \leq L \leq 200$	± 4																																													
$200 < L \leq 500$	± 8																																													
$500 < L \leq 1000$	± 12																																													
$1000 < L$	$\pm 1.5\%$																																													
D	<p>3 Connector rotation angle is within ± 45 degree from the above image. For long length in the case of $L > 500$, the angle is optional.</p> <p>4. Specifications are subject to change without notice.</p>			D																																										
E	<p>【 DIMENSIONS OF CONNECTOR 】</p> 			E																																										
F	<table border="1" data-bbox="175 1859 1516 2150"><thead><tr><th>1</th><th>W. FL2-LP-040HF(06)</th><th>CL331-0311-3-06</th><th>2</th><th>0.81 Dia. coaxial cable</th><th>HALOGEN FREE</th></tr><tr><th>NO.</th><th>PART NO.</th><th>CODE NO.</th><th>NO.</th><th>PART NO.</th><th></th></tr></thead><tbody><tr><td>UNITS mm</td><td></td><td>SCALE FREE</td><td>COUNT 1</td><td>DESCRIPTION OF REVISIONS DIS-D-00003244</td><td>DESIGNED MS. MATSUMOTO</td></tr><tr><td colspan="3">APPROVED : NK. NINOMIYA 16. 07. 26</td><td colspan="3">DRAWING NO.</td></tr><tr><td colspan="3">CHECKED : MT. KANEKO 16. 07. 26</td><td colspan="3">PART NO. WFL2-2LPHF6-04**TV-A-L 1</td></tr><tr><td colspan="3">DESIGNED : MS. MATSUMOTO 16. 07. 26</td><td colspan="3">CODE NO.</td></tr><tr><td colspan="3">DRAWN : MS. MATSUMOTO 16. 07. 26</td><td colspan="3">1/1</td></tr></tbody></table>			1	W. FL2-LP-040HF(06)	CL331-0311-3-06	2	0.81 Dia. coaxial cable	HALOGEN FREE	NO.	PART NO.	CODE NO.	NO.	PART NO.		UNITS mm		SCALE FREE	COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00003244	DESIGNED MS. MATSUMOTO	APPROVED : NK. NINOMIYA 16. 07. 26			DRAWING NO.			CHECKED : MT. KANEKO 16. 07. 26			PART NO. WFL2-2LPHF6-04**TV-A-L 1			DESIGNED : MS. MATSUMOTO 16. 07. 26			CODE NO.			DRAWN : MS. MATSUMOTO 16. 07. 26			1/1			F
1	W. FL2-LP-040HF(06)	CL331-0311-3-06	2	0.81 Dia. coaxial cable	HALOGEN FREE																																									
NO.	PART NO.	CODE NO.	NO.	PART NO.																																										
UNITS mm		SCALE FREE	COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00003244	DESIGNED MS. MATSUMOTO																																									
APPROVED : NK. NINOMIYA 16. 07. 26			DRAWING NO.																																											
CHECKED : MT. KANEKO 16. 07. 26			PART NO. WFL2-2LPHF6-04**TV-A-L 1																																											
DESIGNED : MS. MATSUMOTO 16. 07. 26			CODE NO.																																											
DRAWN : MS. MATSUMOTO 16. 07. 26			1/1																																											