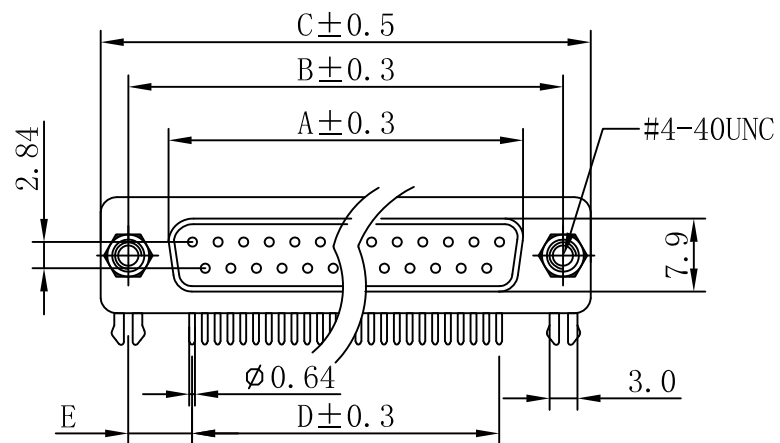


MATERIAL & FINISHES

INSULATOR - PBT GLASS FILLED UL94V-0

CONTACT- BRASS OR PHOSPHOR BRONZE

SHELL - STEEL

PLATING -PLATING - SELECTIVE GOLD OVER NICKEL PLATED

*CONTACT AREA TIN/LEAD OVER NICKEL PLATED (TAIL AREA)

ELECTRICAL CHARACTERISTICS

RATING CURRENT : 3A



CONTACT RESISTANCE : <15mW

INSULATION RESISTANCE : <3000MW AC 500V


DIELECTRIC VOLTAGE : 1000V /MIN

OPERATING TEMPERATURE : -50°C TO+105°C

Soldering time:5±1sec,
solder temperature:220±5°C

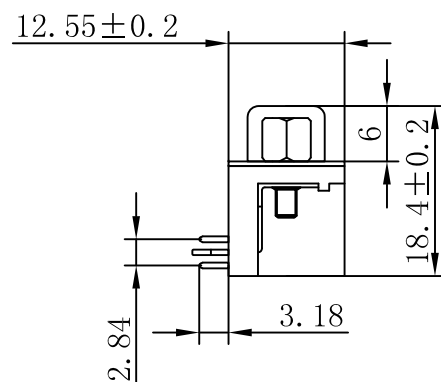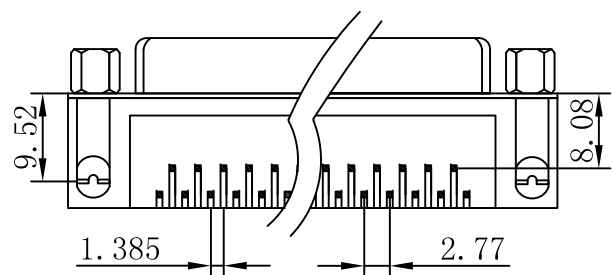

Poles	Part No.	Dim A	Dim B	Dim C	Dim D	Dim E
9	DMR-9S	16.33	24.99	30.81	11.08	6.955
15	DMR-15S	24.66	33.32	39.14	19.39	6.965
25	DMR-25S	38.38	47.04	53.04	33.24	6.90
37	DMR-37S	54.84	63.50	69.32	49.86	6.82

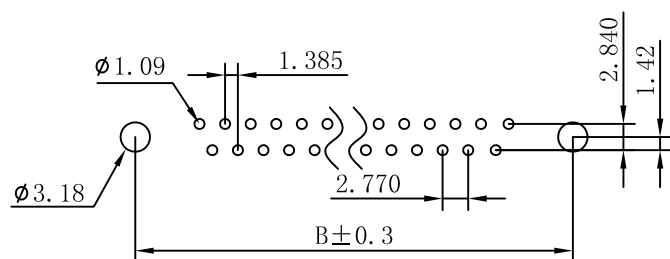

P. C. B LAYOUT

TOLERANCE TABLE	
.0	±0.30
.00	±0.15
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD				
CHECKED:	DATE:					
DRAWN: LYF		DATE: 2008-04-07		TITLE: DMR-XS 母头 半金 叉锁螺丝		
				CLIENT P/N	/	
				UNIT	mm	SCALE
				free		
				FILE NO.	Ckmtw-DMR-0001	REV. A XH00