


WR-12 to 1mm Adapter

P/N: QMC-WC12-1FR

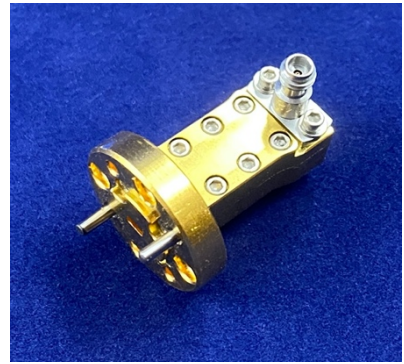


Features

- Low VSWR
- Low Insertion Loss
- Field Replaceable Connector
- Field Replaceable Flange

Parameter	Specification	Notes
Frequency	60.0 to 90.0 GHz	
Insertion Loss	0.75 dB max	
VSWR	1.3:1 typ	1.4:1 dB max
Coaxial Connector	1.0 mm Female	
Waveguide	WR-12	UG387/U
Material	Gold Plated Aluminum	

Measured Data (typical response)

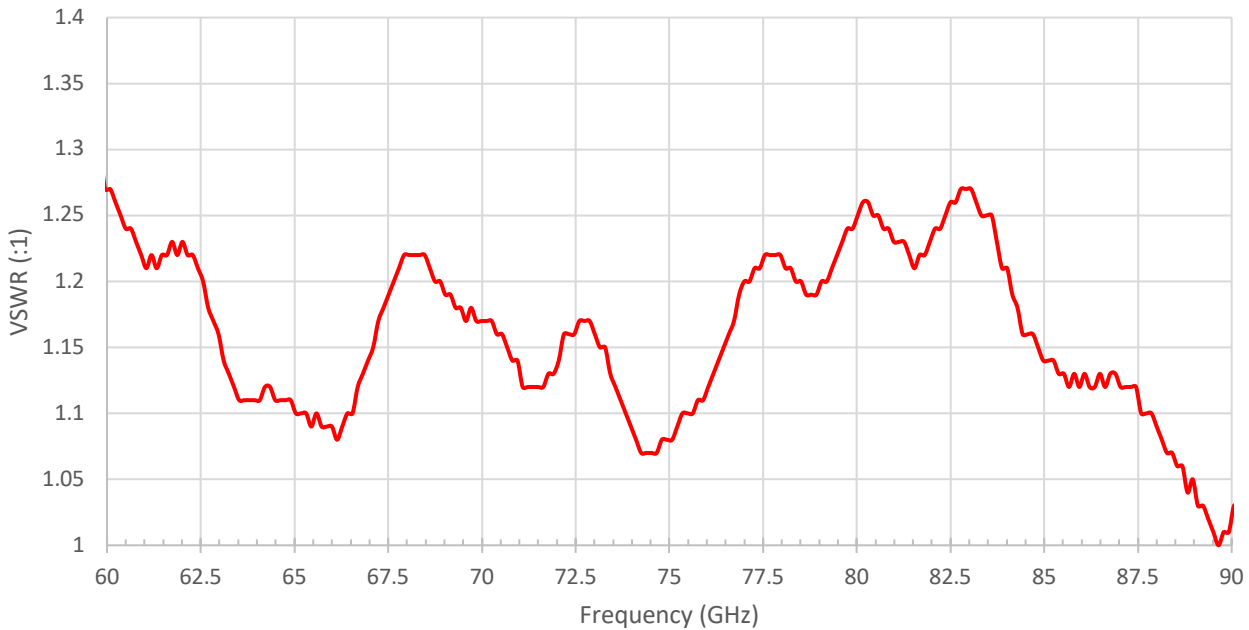

Outline Drawing

