

F

E

D

C

B

A

F





E

D

C

B

A

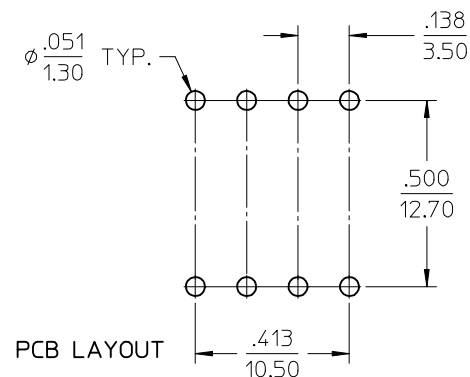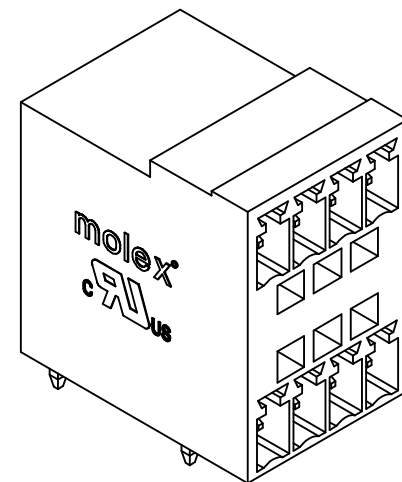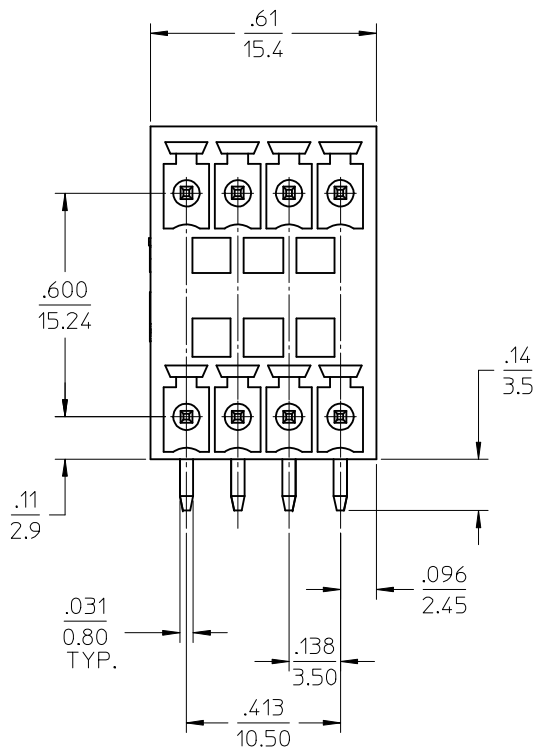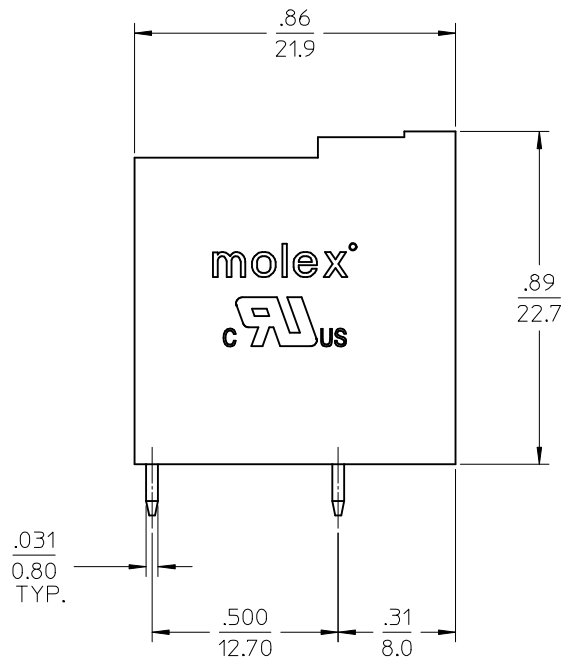

1. MATERIALS:

- A. PLUG BODY: NYLON, BLACK, UL 94 V-0
- B. PINS: BRASS, TIN PLATED

2. ELECTRICAL RATING

- A. VOLTAGE: 300V
- B. CURRENT: 8 AMPS

3. ENVIRONMENTAL

- A. OPERATING TEMP: -40°C YO +105°C (-40°F TO 221°F)

4. AGENCY RECOGNITION

- A. UL (US & CANADA)

5. PART IS RoHS COMPLIANT

6. DIMENSIONS SHOWN ARE FOR REFERENCE ONLY

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	.24-1.18	±.016
>30-120	±0.50	1.18-4.76	±.020
>120	±0.80	>4.76	±.031

REVISED DOC TOL		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO:	PG	DATE	DESCRIPTION	mm	INCH	DRAWN BY	DATE	TITLE	3:1	INCH			
EC NO: IPG2017-0881		2017/03/23	DRWN:ANAGATH	4 PLACES	± --- ± ---	RSTONE	2013/06/03	PLUGABLE TERMINAL BLOCK					
CHKD: CHKD:ANAGATH		2017/04/18	APPR:BRUPERT	3 PLACES	± --- ± ---	CHECKED BY	DATE	8 POLE DUAL ROW HEADER					
				2 PLACES	± --- ± ---	B RUPERT	2013/06/05						
				1 PLACE	± --- ± ---	APPROVED BY	DATE						
				0 PLACE	± --- ± ---	BWOODMAN	2013/06/13						
				ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.					
				DRAFT WHERE APPLICABLE		395027008		SD-39502-002					
				MUST REMAIN WITHIN DIMENSIONS		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					