
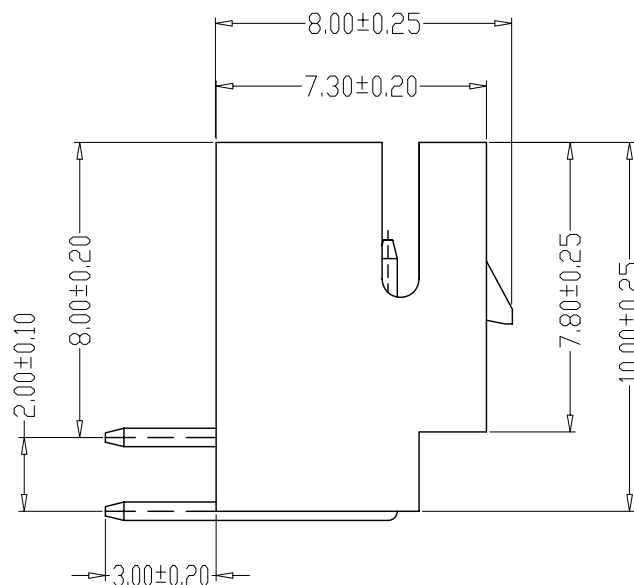



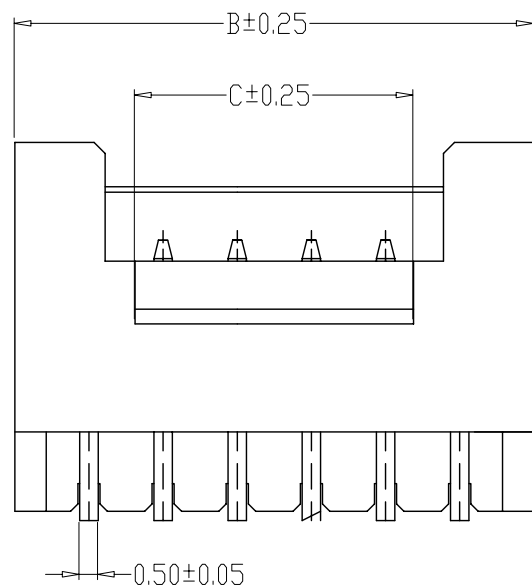


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~ +85℃
- 4、Contact Resistance: 30mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang:1000V AC/minute
- 7、Material:Wafer Nylon66,UL94V-0
PIN Brass Tin-plated

Ordering Information & Dimensions Unit: mm

PART NO.	Dimensions		
	A	B	C
A2008WR-2X02P	2.00	6.00	3.00
A2008WR-2X03P	4.00	8.00	3.00
A2008WR-2X04P	6.00	10.00	3.00
A2008WR-2X05P	8.00	12.00	5.00
A2008WR-2X06P	10.00	14.00	7.00
A2008WR-2X07P	12.00	16.00	9.00
A2008WR-2X08P	14.00	18.00	11.00
A2008WR-2X09P	16.00	20.00	13.00
A2008WR-2X10P	18.00	22.00	15.00
A2008WR-2X11P	20.00	24.00	17.00
A2008WR-2X12P	22.00	26.00	19.00
A2008WR-2X13P	24.00	28.00	21.00
A2008WR-2X14P	26.00	30.00	23.00
A2008WR-2X22P	42.00	46.00	39.00

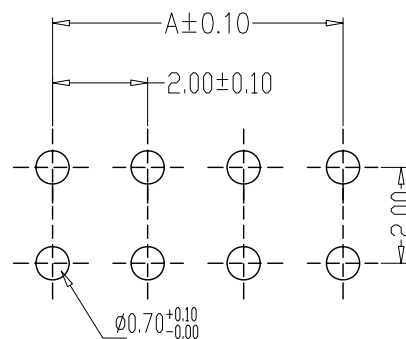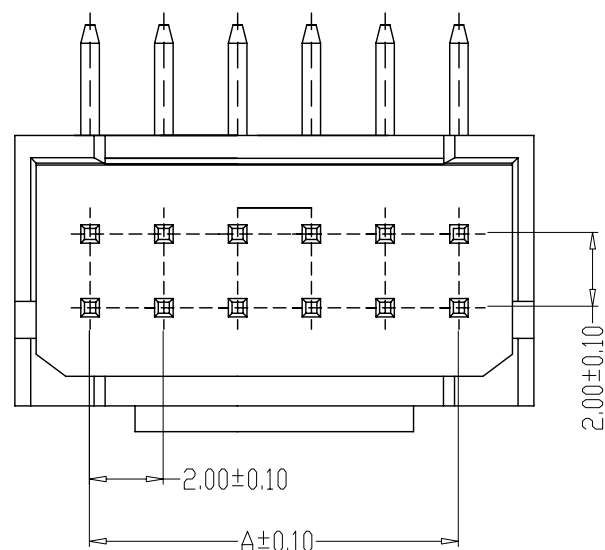

PCB LAYOUT

深圳市威尔杰电子有限公司

REVISION	DATE	DESCRIPTION	APPROVALBY	DRAWN BY	陈永东	DESIGNED BY	SCALE	1:1
△				CHECKE		MATERIALS	DATE	2015/03/17
				BY				

A2008WR-2XNP

0.	±0.30
0.0	±0.25
0.00	±0.20
0.000	±0.10
VER NO.	A0
032	