

### DEUTSCH | DEUTSCH DT

TE Internal #: W2SA-P012 Automotive Connector Locks & Position Assurance, Secondary Lock, Gray, PBT, 2 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT

#### View on TE.com >

Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Locks & Position Assurance >

=TE -TE

Connector & Contact Retention Accessory Type: Secondary Lock

Primary Product Color: Gray

Primary Product Material: **PBT** 

Number of Positions: 2

Wedgelocks: DEUTSCH DT

Sealable: No

All Wedgelocks: DEUTSCH DT (51)



## Features

## **Product Type Features**

Connector & Contact Retention Accessory Type	Secondary Lock				
Sealable	No				
Configuration Features					
Number of Positions	2				
Body Features					
Primary Product Color	Gray				
Primary Product Material	PBT				
Usage Conditions					
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]				
Industry Standards					
UL Flammability Rating	UL 94HB				

Automotive Connector Locks & Position Assurance, Secondary Lock, Gray, PBT, 2 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT



### Packaging Features

Packaging Quantity	1			
Packaging Method	Box			
Other				
Serviceable	Yes			

## **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

Automotive Connector Locks & Position Assurance, Secondary Lock, Gray, PBT, 2 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT





# Also in the Series DEUTSCH DT









Automotive Connector Caps & Covers (19)	Automotive Connector Locks & Position Assurance(74)	Automotive Housings(658)	Connector Backshells(58)
Connector Seals & Cavity Plugs(6)	Connector Strain Relief(28)	Insertion & Extraction Tools(3)	Other Automotive Connector Accessories(27)




PCB Headers & Receptacles(103)

# **Customers Also Bought**

**C** For support call+1 800 522 6752

Automotive Connector Locks & Position Assurance, Secondary Lock, Gray, PBT, 2 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT



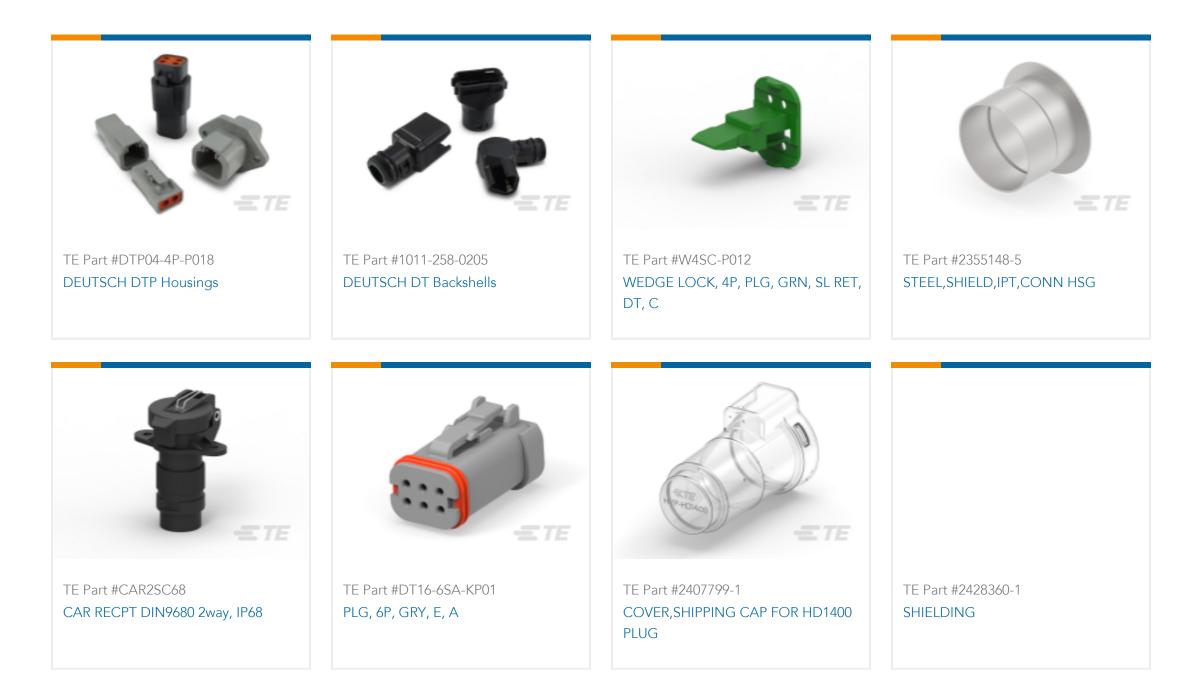

# Documents

Product Drawings WEDGE LOCK, 2P, PLG, GRY, SL RET, DT, A

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_W2SA-P012\_E.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_W2SA-P012\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_W2SA-P012\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

**Product Specifications** 

**Application Specification** 

English

Automotive Connector Locks & Position Assurance, Secondary Lock, Gray, PBT, 2 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT



Agency Approvals UL Report

English