

wire connector CU 4 units accessory for: 3VA6 150/250



Model		
product brand name	SENTRON	
product designation	accessories	
Product version	circular conductor terminal	
Accessories	Wire connector	
General technical data		
designaion / of the terminal	TC1.4	
Voltage		
Current		
Mechanical Design		
Connections according IEC		
IEC-marking / of terminals	16-185 mm² CU>NNL	
stripped length	20 mm	
Connetctions according UL		
UL-marking / of terminals	TC1.4 CMC 6-350 CU9 UR CSA	
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C	
stripped length	0.8 in	
connectable conductor cross-section • for copper cable / stranded / minimum • for copper cable / stranded / maximum • for copper cable / finely stranded / minimum • for copper cable / finely stranded / maximum	6 AWG 350 kcmil 6 AWG 350 kcmil	
tightening torque / when using copper cables • stranded • finely stranded	6 - 2 AWG: 140 lb-in 1 AWG - 350 kcmil: 275 lb-in 6 - 2 AWG: 140 lb-in 1 AWG - 350 kcmil: 275 lb-in	
Certificates		
General Product Approval	EMC	Declaration of Conformity



[Miscellaneous](#)



Declaration of Conformity

Shipping

other

[Manufacturer Declaration](#)

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9244-0JD12>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3VA9244-0JD12>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9244-0JD12

Tender specifications

<http://www.siemens.com/specifications>

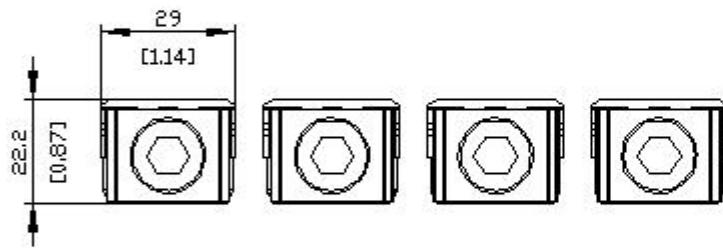

last modified:

12/20/2020 