

APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

Soft Termination MLCC for Automotive (ST series)

Qualified to AEC-Q200

0402 to 1812 Sizes (10V to 3000V)

X7R Dielectric

Halogen Free & RoHS Compliance

*Contents in this sheet are subject to change without prior notice.

Multilayer Ceramic Capacitors

1. DESCRIPTION

WTC Soft Termination Chip Multilayer Ceramic Capacitors for Automotive is designed and with a polymer layer within end terminations of product, which can absorb mechanical stress caused by PCB handling in SMT line and reduce the mechanical impact for product. It will offer more robust and reliable performance in applications.

WTC's ST series MLCC is made by X7R dielectric and which provides product with high electrical precision, stability and reliability. Besides, ST series MLCC is tighten controlling in quality in line to assure quality performance in automotive applications. The ST series is AEC-Q200 compliant.

2. FEATURES

- MLCC's terminations are with a soft & flexible polymer layer to withstand high bending stress in SMT line.
- High reliability: AEC-Q200.

3. APPLICATIONS

- Automotive, power supply and related industries. .
- The other mechanical stress concerned products or the set having a high probability of fall.
- Prevention of ceramic body cracks by board bending.


4. HOW TO ORDER

<u>ST</u>	<u>18</u>	<u>B</u>	<u>102</u>	<u>K</u>	<u>500</u>	<u>C</u>	<u>I</u>
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging style
ST= Soft Termination MLCC for Automotive (ST series) Qualified to AEC-Q200	15=0402 (1005) 18=0603 (1608) 21=0805 (2012) 31=1206 (3216) 32=1210 (3225) 43=1812 (4532)	B=X7R	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 102=10x10 ² =1000pF	J=±5% K=±10% M=±20%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC 102=1000 VDC 302=3000 VDC	C= Cu+Conductive resin /Ni /Sn	T=7" reeled G=13" reeled

5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Remark	M _B (mm)
0402 (1005)	1.00±0.20	0.50±0.20	0.50±0.20	E #	0.25 +0.05/-0.10
0603 (1608)	1.60±0.20	0.80±0.10	0.80±0.07	S	0.40±0.15
	1.60±0.30	0.80±0.30	0.80±0.30	X	
0805 (2012)	2.00±0.20	1.25±0.10	0.80±0.10	B	0.50±0.20
			1.25±0.10	D #	
	2.00±0.30	1.25±0.30	1.25±0.30	I #	
1206 (3216)	3.20+0.4/-0.1	1.60±0.15	0.80±0.10	B	0.75±0.25
			1.25±0.10	D #	
	3.20±0.50	1.60±0.50	1.60±0.50	P	
1210 (3225)	3.20±0.60	2.50±0.50	2.50±0.50	M #	0.75±0.25
1812 (4532)	4.50+0.6/-0.4	3.20±0.30	1.25±0.10	D #	0.75±0.25
			1.60±0.20	G #	
			2.00±0.20	K #	
			3.20±0.40	M #	

Reflow soldering only is recommended.

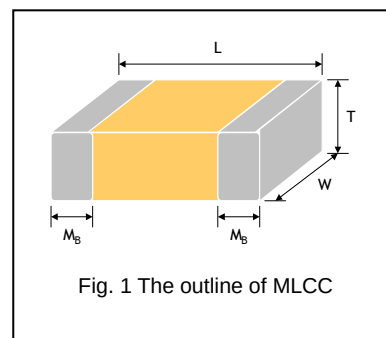

6. GENERAL ELECTRICAL DATA

Dielectric	X7R
Size	0402, 0603, 0805, 1206, 1210, 1812
Capacitance range*	270pF to 10μF
Capacitance tolerance**	J (±5%), K (±10%), M (±20%)
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V, 1000V, 3000V
Operating temperature	-55 to +125°C
Capacitance characteristic	±15%
Termination	Ni/Sn (lead-free termination)

* Measured at the condition of 30~70% related humidity.

Measured at 1.0±0.2Vrms, 30~70% related humidity, 25°C ambient temperature for X7R.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in a mbient condition for 24±2 hours before measurement.

7. CAPACITANCE RANGE

DIELECTRIC		X7R																			
SIZE		0402	0603					0805					1206		1210			1812			
RATED VOLTAGE (VDC)		16	10	16	25	50	100	10	16	25	50	100	50	100	25	50	100	10	16	1000	3000
Capacitance	270pF (271)																	D	D	D	K
	330pF (331)																	D	D	D	K
	390pF (391)																	D	D	D	K
	470pF (471)																	D	D	D	K
	560pF (561)																	D	D	D	K
	680pF (681)																	D	D	D	K
	820pF (821)																	D	D	D	K
	1,000pF (102)		S	S	S	S	S	D	D	D	D	B		B				D	D	D	K
	1,200pF (122)		S	S	S	S	S	D	D	D	D	B		B				D	D	D	M
	1,500pF (152)		S	S	S	S	S	D	D	D	D	B		B				D	D	D	M
	1,800pF (182)		S	S	S	S	S	D	D	D	D	B		B				D	D	D	M
	2,200pF (222)		S	S	S	S	S	D	D	D	D	B		B				D	D	D	
	2,700pF (272)		S	S	S	S	S	D	D	D	D	B		B				D	D	D	
	3,300pF (332)		S	S	S	S	S	D	D	D	D	B		B				D	D	G	
	3,900pF (392)		S	S	S	S	S	D	D	D	D	B		B				D	D	K	
	4,700pF (472)		S	S	S	S	S	D	D	D	D	B		B				D	D	M	
	5,600pF (562)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	6,800pF (682)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	8,200pF (822)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	0.010μF (103)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	0.012μF (123)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	0.015μF (153)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	0.018μF (183)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	0.022μF (223)		S	S	S	S	S	D	D	D	D	B		B				D	D		
	0.027μF (273)		S	S	S	S	S	D	D	D	D	D		B				D	D		
	0.033μF (333)		S	S	S	X		D	D	D	D	D		B				D	D		
	0.039μF (393)		S	S	S	X		D	D	D	D	D		B				D	D		
	0.047μF (473)		S	S	S	X		D	D	D	D	D		B				D	D		
	0.056μF (563)	E	S	S	S	X		D	D	D	D	D		B				D	D		
	0.068μF (683)	E	S	S	S	X		D	D	D	D	D		B				D	D		
	0.082μF (823)	E	S	S	S	X		D	D	D	D	D		D				D	D		
	0.10μF (104)	E	S	S	S	X		D	D	D	D	D		D				D	D		
	0.12μF (124)		X	X	X			D	D	D	D	D						D	D		
	0.15μF (154)		X	X	X			D	D	D	D	D						D	D		
	0.18μF (184)		X	X	X			D	D	D	D	D						D	D		
	0.22μF (224)		X	X	X			D	D	D	D	D						D	D		
	0.27μF (274)							I	I	I	I	I						D	D		
	0.33μF (334)							I	I	I	I	I						D	D		
	0.39μF (394)							I	I	I	I	I						D	D		
	0.47μF (474)							I	I	I	I	I						D	D		
0.56μF (564)							I	I	I	I	I						D	D			
0.68μF (684)							I	I	I	I	I						D	D			
0.82μF (824)							I	I	I	I	I						D	D			
1.0μF (105)							I	I	I	I	I						D	D			
1.2μF (125)																	D	D			
1.5μF (155)																	D	D			
1.8μF (185)																	G	G			
2.2μF (225)												P	P			M	G	G			
2.7μF (275)																	K	K			
3.3μF (335)																	K	K			
3.9μF (395)																	K	K			
4.7μF (475)																M	M	M			
5.6μF (565)																M	M	M			
6.8μF (685)																	M	M			
8.2μF (825)																	M	M			
10μF (106)															M	M	M	M			

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

8. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.20	E	10k	-	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80±0.30	X	4k	15k	-	-
0805 (2012)	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.30	I	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.60±0.50	P	-	-	2k	9k
1210 (3225)	2.50±0.50	M	-	-	1k	6k
1812 (4532)	1.25±0.10	D	-	-	1k	5k
	1.60±0.20	G	-	-	1k	4k
	2.00±0.20	K	-	-	1k	3k
	2.50±0.50	M	-	-	0.5k	3k

Unit: pieces

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																					
1.	Pre-and Post-Stress Electrical Test	---																																						
2.	High Temperature Exposure (Storage) MIL-STD-202 Method 108	* Test temp.: 150±3℃ * Unpowered. * Test time: 1000+24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change : NPO: within ±2.5% or ±0.25pF whichever is larger. X7R: within ±10%. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: 1. 1812/10V~16V: D.F. ≤ 7%; 1812≥1KV: D.F. ≤ 5% 2. <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="2">50V</td><td rowspan="2">≤ 3%</td><td>≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="4">35V</td><td rowspan="4">≤ 5%</td><td>≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805/X7R > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 14% 0603 ≥ 0.33μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 5%</td><td>≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤ 5%</td><td>≤ 15% 0201 ≥ 0.022μF; 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤ 7.5%</td><td>≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td>0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>6.3V</td><td>≤ 15%</td><td>≤ 30%</td></tr><tr><td>4V</td><td>≤ 20%</td><td>---</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF	≤ 7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 3%	≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF	35V	≤ 5%	≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805/X7R > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	≤ 10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	≤ 10% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 14% 0603 ≥ 0.33μF	25V	≤ 5%	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 20% 0402 ≥ 0.47μF	≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	16V	≤ 5%	≤ 15% 0201 ≥ 0.022μF; 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	10V	≤ 7.5%	≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	6.3V	≤ 15%	≤ 30%	4V	≤ 20%	---
Rated vol.	D.F. ≤	Exception of D.F. ≤																																						
≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF																																						
		≤ 7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																						
		≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF																																						
50V	≤ 3%	≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																						
		≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																						
35V	≤ 5%	≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805/X7R > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																						
		≤ 10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																						
		≤ 10% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																						
		≤ 14% 0603 ≥ 0.33μF																																						
25V	≤ 5%	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																						
		≤ 20% 0402 ≥ 0.47μF																																						
		≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																						
16V	≤ 5%	≤ 15% 0201 ≥ 0.022μF; 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																						
		≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																						
10V	≤ 7.5%	≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF																																						
		0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																						
6.3V	≤ 15%	≤ 30%																																						
4V	≤ 20%	---																																						

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																											
2.	High Temperature Exposure (Storage) MIL-STD-202 Method 108 (continue)		* I.R.: $\geq 10G\Omega$ or $RxC\geq 500\Omega\cdot F$ whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>$\geq 100V$: All X7R;1210$\geq 3.3\mu F$</td><td rowspan="6">1GΩ or $RxC\geq 10\Omega\cdot F$ whichever is smaller.</td></tr><tr><td>50V: 0402$>0.01\mu F$;0603$\geq 1\mu F$;0805$\geq 1\mu F$;1206$\geq 4.7\mu F$;1210$\geq 4.7\mu F$</td></tr><tr><td>35V: 0603$\geq 1\mu F$;0805$\geq 2.2\mu F$;1206$\geq 2.2\mu F$;1210$\geq 10\mu F$</td></tr><tr><td>25V: 0201$\geq 0.1\mu F$;0402$\geq 0.22\mu F$;0603$\geq 2.2\mu F$;0805$\geq 2.2\mu F$;1206$\geq 10\mu F$;1210$\geq 10\mu F$</td></tr><tr><td>16V: 0201$\geq 0.1\mu F$;0402$\geq 0.22\mu F$;0603$\geq 1\mu F$;0805$\geq 2.2\mu F$;1206$\geq 10\mu F$;1210$\geq 47\mu F$</td></tr><tr><td>10V: 0201$\geq 47nF$;0402$\geq 0.47\mu F$;0603$\geq 0.47\mu F$;0805$\geq 2.2\mu F$;1206$\geq 4.7\mu F$;1210$\geq 47\mu F$</td></tr><tr><td>6.3V; 4V; Size≥ 1812</td><td></td></tr></table>	Rated voltage	Insulation Resistance	$\geq 100V$: All X7R;1210 $\geq 3.3\mu F$	1G Ω or $RxC\geq 10\Omega\cdot F$ whichever is smaller.	50V: 0402 $>0.01\mu F$;0603 $\geq 1\mu F$;0805 $\geq 1\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 4.7\mu F$	35V: 0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$	25V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 2.2\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 10\mu F$	16V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 47\mu F$	10V: 0201 $\geq 47nF$;0402 $\geq 0.47\mu F$;0603 $\geq 0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 47\mu F$	6.3V; 4V; Size ≥ 1812																																																	
Rated voltage	Insulation Resistance																																																													
$\geq 100V$: All X7R;1210 $\geq 3.3\mu F$	1G Ω or $RxC\geq 10\Omega\cdot F$ whichever is smaller.																																																													
50V: 0402 $>0.01\mu F$;0603 $\geq 1\mu F$;0805 $\geq 1\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 4.7\mu F$																																																														
35V: 0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$																																																														
25V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 2.2\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 10\mu F$																																																														
16V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 47\mu F$																																																														
10V: 0201 $\geq 47nF$;0402 $\geq 0.47\mu F$;0603 $\geq 0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 47\mu F$																																																														
6.3V; 4V; Size ≥ 1812																																																														
3.	Temperature Cycling JESD22 Method JA-104	* Conduct 1000 cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>-55°C +0/-3</td><td>5± 1</td></tr><tr><td>2</td><td>+125°C +3/-0</td><td>5± 1</td></tr></table> * Before initial measurement (X7R only): Perform 150+0/-10°C for 1 hr and then set for 24± 2 hrs at room temp. *Measurement to be made after keeping at room temp. for 24± 2 hrs.	Step	Temp. (°C)	Time (min.)	1	-55°C +0/-3	5 ± 1	2	+125°C +3/-0	5 ± 1	* No remarkable damage. * Cap change : NPO: within $\pm 2.5\%$ or 0.25pF whichever is larger. X7R: within $\pm 10.0\%$. * Q/D.F. value: NPO: Cap$\geq 30pF$, Q≥ 1000 ; Cap$< 30pF$, Q$\geq 400+20C$. X7R:.. 1. 1812/10V~16V: D.F. $\leq 7\%$; 1812$\geq 1KV$:: D.F. $\leq 5\%$ 2. <table><tr><th>Rated vol.</th><th>D.F. $\leq$</th><th>Exception of D.F. $\leq$</th></tr><tr><td rowspan="3">100V</td><td rowspan="3">$\leq 3\%$</td><td>$\leq 6\%$: 1206 $\geq 0.47\mu F$</td></tr><tr><td>$\leq 7.5\%$: 0603 $\geq 0.068\mu F$;0805 $> 0.1\mu F$;1206 $\geq 1\mu F$;1210 $\geq 2.2\mu F$</td></tr><tr><td>$\leq 20\%$: 0805 $> 0.22\mu F$;1210 $\geq 3.3\mu F$</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">$\leq 3\%$</td><td>$\leq 6\%$: 0201(50V);0603 $\geq 0.047\mu F$;0805 $\geq 0.18\mu F$;1206 $\geq 0.47\mu F$</td></tr><tr><td>$\leq 10\%$: 0201 $\geq 0.01\mu F$;1210 $\geq 3.3\mu F$</td></tr><tr><td>$\leq 20\%$: 0402 $\geq 0.012\mu F$;0603$>0.1\mu F$; 0805/X7R$>0.47\mu F$; 1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">$\leq 5\%$</td><td>$\leq 20\%$: 0603 $\geq 1\mu F$;0805$\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$</td></tr><tr><td>$\leq 10\%$: 0201 $\geq 0.01\mu F$;0805 $\geq 1\mu F$;1210 $\geq 10\mu F$</td></tr><tr><td>$\leq 14\%$: 0603 $\geq 0.33\mu F$</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">$\leq 5\%$</td><td>$\leq 15\%$: 0201 $\geq 0.1\mu F$; 0402 $\geq 0.056\mu F$;0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 22\mu F$</td></tr><tr><td>$\leq 20\%$: 0402 $\geq 0.47\mu F$</td></tr><tr><td>$\leq 10\%$: 0603 $\geq 0.15\mu F$;0805 $\geq 0.68\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 4.7\mu F$</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">$\leq 5\%$</td><td>$\leq 15\%$: 0201 $\geq 0.022\mu F$;0402 $\geq 0.033\mu F$; 0603$>0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 22\mu F$</td></tr><tr><td>$\leq 15\%$: 0201 $\geq 0.012\mu F$;0402 $\geq 0.15\mu F$; 0603 $\geq 0.33\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 22\mu F$</td></tr><tr><td>$\leq 20\%$: 0201 $\geq 0.1\mu F$;0402 $\geq 1\mu F$</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">$\leq 7.5\%$</td><td>$\leq 30\%$: 0201 $\geq 0.1\mu F$;0402 $\geq 1\mu F$;0603 $\geq 10\mu F$; 0805 $\geq 4.7\mu F$;1206 $\geq 47\mu F$;1210 $\geq 100\mu F$</td></tr><tr><td>---</td></tr><tr><td>---</td></tr><tr><td>6.3V</td><td>$\leq 15\%$</td><td></td></tr><tr><td>4V</td><td>$\leq 20\%$</td><td></td></tr></table> * I.R.: $\geq 10G\Omega$ or $RxC\geq 500\Omega\cdot F$ whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>$\geq 100V$: All X7R;1210$\geq 3.3\mu F$</td><td rowspan="6">1GΩ or $RxC\geq 10\Omega\cdot F$ whichever is smaller.</td></tr><tr><td>50V: 0402$>0.01\mu F$;0603$\geq 1\mu F$;0805$\geq 1\mu F$;1206$\geq 4.7\mu F$;1210$\geq 4.7\mu F$</td></tr><tr><td>35V: 0603$\geq 1\mu F$;0805$\geq 2.2\mu F$;1206$\geq 2.2\mu F$;1210$\geq 10\mu F$</td></tr><tr><td>25V: 0201$\geq 0.1\mu F$;0402$\geq 0.22\mu F$;0603$\geq 2.2\mu F$;0805$\geq 2.2\mu F$;1206$\geq 10\mu F$;1210$\geq 10\mu F$</td></tr><tr><td>16V: 0201$\geq 0.1\mu F$;0402$\geq 0.22\mu F$;0603$\geq 1\mu F$;0805$\geq 2.2\mu F$;1206$\geq 10\mu F$;1210$\geq 47\mu F$</td></tr><tr><td>10V: 0201$\geq 47nF$;0402$\geq 0.47\mu F$;0603$\geq 0.47\mu F$;0805$\geq 2.2\mu F$;1206$\geq 4.7\mu F$;1210$\geq 47\mu F$</td></tr><tr><td>6.3V; 4V; Size≥ 1812</td><td></td></tr></table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$	100V	$\leq 3\%$	$\leq 6\%$: 1206 $\geq 0.47\mu F$	$\leq 7.5\%$: 0603 $\geq 0.068\mu F$;0805 $> 0.1\mu F$;1206 $\geq 1\mu F$;1210 $\geq 2.2\mu F$	$\leq 20\%$: 0805 $> 0.22\mu F$;1210 $\geq 3.3\mu F$	50V	$\leq 3\%$	$\leq 6\%$: 0201(50V);0603 $\geq 0.047\mu F$;0805 $\geq 0.18\mu F$;1206 $\geq 0.47\mu F$	$\leq 10\%$: 0201 $\geq 0.01\mu F$;1210 $\geq 3.3\mu F$	$\leq 20\%$: 0402 $\geq 0.012\mu F$;0603 $>0.1\mu F$; 0805/X7R $>0.47\mu F$; 1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$	35V	$\leq 5\%$	$\leq 20\%$: 0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$	$\leq 10\%$: 0201 $\geq 0.01\mu F$;0805 $\geq 1\mu F$;1210 $\geq 10\mu F$	$\leq 14\%$: 0603 $\geq 0.33\mu F$	25V	$\leq 5\%$	$\leq 15\%$: 0201 $\geq 0.1\mu F$; 0402 $\geq 0.056\mu F$;0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 22\mu F$	$\leq 20\%$: 0402 $\geq 0.47\mu F$	$\leq 10\%$: 0603 $\geq 0.15\mu F$;0805 $\geq 0.68\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 4.7\mu F$	16V	$\leq 5\%$	$\leq 15\%$: 0201 $\geq 0.022\mu F$;0402 $\geq 0.033\mu F$; 0603 $>0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 22\mu F$	$\leq 15\%$: 0201 $\geq 0.012\mu F$;0402 $\geq 0.15\mu F$; 0603 $\geq 0.33\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 22\mu F$	$\leq 20\%$: 0201 $\geq 0.1\mu F$;0402 $\geq 1\mu F$	10V	$\leq 7.5\%$	$\leq 30\%$: 0201 $\geq 0.1\mu F$;0402 $\geq 1\mu F$;0603 $\geq 10\mu F$; 0805 $\geq 4.7\mu F$;1206 $\geq 47\mu F$;1210 $\geq 100\mu F$	---	---	6.3V	$\leq 15\%$		4V	$\leq 20\%$		Rated voltage	Insulation Resistance	$\geq 100V$: All X7R;1210 $\geq 3.3\mu F$	1G Ω or $RxC\geq 10\Omega\cdot F$ whichever is smaller.	50V: 0402 $>0.01\mu F$;0603 $\geq 1\mu F$;0805 $\geq 1\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 4.7\mu F$	35V: 0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$	25V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 2.2\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 10\mu F$	16V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 47\mu F$	10V: 0201 $\geq 47nF$;0402 $\geq 0.47\mu F$;0603 $\geq 0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 47\mu F$	6.3V; 4V; Size ≥ 1812	
Step	Temp. (°C)	Time (min.)																																																												
1	-55°C +0/-3	5 ± 1																																																												
2	+125°C +3/-0	5 ± 1																																																												
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																												
100V	$\leq 3\%$	$\leq 6\%$: 1206 $\geq 0.47\mu F$																																																												
		$\leq 7.5\%$: 0603 $\geq 0.068\mu F$;0805 $> 0.1\mu F$;1206 $\geq 1\mu F$;1210 $\geq 2.2\mu F$																																																												
		$\leq 20\%$: 0805 $> 0.22\mu F$;1210 $\geq 3.3\mu F$																																																												
50V	$\leq 3\%$	$\leq 6\%$: 0201(50V);0603 $\geq 0.047\mu F$;0805 $\geq 0.18\mu F$;1206 $\geq 0.47\mu F$																																																												
		$\leq 10\%$: 0201 $\geq 0.01\mu F$;1210 $\geq 3.3\mu F$																																																												
		$\leq 20\%$: 0402 $\geq 0.012\mu F$;0603 $>0.1\mu F$; 0805/X7R $>0.47\mu F$; 1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$																																																												
35V	$\leq 5\%$	$\leq 20\%$: 0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$																																																												
		$\leq 10\%$: 0201 $\geq 0.01\mu F$;0805 $\geq 1\mu F$;1210 $\geq 10\mu F$																																																												
		$\leq 14\%$: 0603 $\geq 0.33\mu F$																																																												
25V	$\leq 5\%$	$\leq 15\%$: 0201 $\geq 0.1\mu F$; 0402 $\geq 0.056\mu F$;0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 22\mu F$																																																												
		$\leq 20\%$: 0402 $\geq 0.47\mu F$																																																												
		$\leq 10\%$: 0603 $\geq 0.15\mu F$;0805 $\geq 0.68\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 4.7\mu F$																																																												
16V	$\leq 5\%$	$\leq 15\%$: 0201 $\geq 0.022\mu F$;0402 $\geq 0.033\mu F$; 0603 $>0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 22\mu F$																																																												
		$\leq 15\%$: 0201 $\geq 0.012\mu F$;0402 $\geq 0.15\mu F$; 0603 $\geq 0.33\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 22\mu F$																																																												
		$\leq 20\%$: 0201 $\geq 0.1\mu F$;0402 $\geq 1\mu F$																																																												
10V	$\leq 7.5\%$	$\leq 30\%$: 0201 $\geq 0.1\mu F$;0402 $\geq 1\mu F$;0603 $\geq 10\mu F$; 0805 $\geq 4.7\mu F$;1206 $\geq 47\mu F$;1210 $\geq 100\mu F$																																																												

6.3V	$\leq 15\%$																																																													
4V	$\leq 20\%$																																																													
Rated voltage	Insulation Resistance																																																													
$\geq 100V$: All X7R;1210 $\geq 3.3\mu F$	1G Ω or $RxC\geq 10\Omega\cdot F$ whichever is smaller.																																																													
50V: 0402 $>0.01\mu F$;0603 $\geq 1\mu F$;0805 $\geq 1\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 4.7\mu F$																																																														
35V: 0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 2.2\mu F$;1210 $\geq 10\mu F$																																																														
25V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 2.2\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 10\mu F$																																																														
16V: 0201 $\geq 0.1\mu F$;0402 $\geq 0.22\mu F$;0603 $\geq 1\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 10\mu F$;1210 $\geq 47\mu F$																																																														
10V: 0201 $\geq 47nF$;0402 $\geq 0.47\mu F$;0603 $\geq 0.47\mu F$;0805 $\geq 2.2\mu F$;1206 $\geq 4.7\mu F$;1210 $\geq 47\mu F$																																																														
6.3V; 4V; Size ≥ 1812																																																														

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																															
4.	Destructive Physical Analysis EIA-469	Per EIA-469	No defects or abnormalities																																															
5.	Moisture Resistance MIL-STD-202 Method 106	* Test temp.: 25~65℃ * Humidity: 80~100% RH * Test time: 10 cycles, t=24hrs/cycle. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change : NPO: within ±3.0% or 0.30pF whichever is larger X7R: within ±12.5%. * Q/D.F. value: NPO: More than 30pF Q≥350 ; 10pF≤C≤30pF, Q≥275+2.5C Less than 10pF Q≥200+10C X7R: 1. 1812/10V~16V: D.F. ≤ 7%; 1812≥1KV: D.F. ≤ 5% 2. <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF</td></tr><tr><td>≤ 20% 0805 > 0.22μF;1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.012μF;0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 5%</td><td>≤ 20% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 5%</td><td>≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF</td></tr><tr><td>≤ 14% 0603 ≥ 0.33μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 5%</td><td>≤ 20% 0402 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.022μF;0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤ 7.5%</td><td>≤ 15% 0201 ≥ 0.012μF;0402 ≥ 0.15μF; 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF</td></tr><tr><td>≤ 20% 0201 ≥ 0.1μF;0402 ≥ 1μF</td></tr><tr><td>≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF</td></tr><tr><td>6.3V</td><td>≤ 15%</td><td>---</td></tr><tr><td>4V</td><td>≤ 20%</td><td>---</td></tr></table> * I.R.: ≥10GΩ or RxC≥500Ω·F whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥ 100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or RxC ≥ 10 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr><tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr><tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF	≤ 7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF	≤ 20% 0805 > 0.22μF;1210 ≥ 3.3μF	50V	≤ 3%	≤ 6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF	≤ 10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF	≤ 20% 0402 ≥ 0.012μF;0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF	35V	≤ 5%	≤ 20% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF	25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF	≤ 14% 0603 ≥ 0.33μF	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	16V	≤ 5%	≤ 20% 0402 ≥ 0.47μF	≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF	≤ 15% 0201 ≥ 0.022μF;0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF;0402 ≥ 0.15μF; 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF	≤ 20% 0201 ≥ 0.1μF;0402 ≥ 1μF	≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF	6.3V	≤ 15%	---	4V	≤ 20%	---	Rated voltage	Insulation Resistance	≥ 100V: All X7R;1210≥3.3μF	1GΩ or RxC ≥ 10 Ω·F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF	25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V; 4V; Size≥1812
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																
≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF																																																
		≤ 7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF																																																
		≤ 20% 0805 > 0.22μF;1210 ≥ 3.3μF																																																
50V	≤ 3%	≤ 6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF																																																
		≤ 10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF																																																
		≤ 20% 0402 ≥ 0.012μF;0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF																																																
35V	≤ 5%	≤ 20% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF																																																
25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF																																																
		≤ 14% 0603 ≥ 0.33μF																																																
		≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																
16V	≤ 5%	≤ 20% 0402 ≥ 0.47μF																																																
		≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF																																																
		≤ 15% 0201 ≥ 0.022μF;0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																
10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF;0402 ≥ 0.15μF; 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF																																																
		≤ 20% 0201 ≥ 0.1μF;0402 ≥ 1μF																																																
		≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF																																																
6.3V	≤ 15%	---																																																
4V	≤ 20%	---																																																
Rated voltage	Insulation Resistance																																																	
≥ 100V: All X7R;1210≥3.3μF	1GΩ or RxC ≥ 10 Ω·F whichever is smaller.																																																	
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																		
35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF																																																		
25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF																																																		
16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF																																																		
10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																		
6.3V; 4V; Size≥1812																																																		

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements
6.	Biased Humidity MIL-STD-202 Method 103	* Test temp.: 85±3℃	* No remarkable damage.
		* Humidity: 85%RH	* Cap change: NPO: within ±3.0% or 0.30pF whichever is larger. X7R: within ±12.5%
		* Test time: 1000+24/-0 hrs.	* Q/D.F. value:
		* To apply voltage :	NPO: C≥30pF , Q≥200 ; C<30pF , Q≥100+10/3C
		rated voltage(Max.500V) and 1.3~1.5Vdc.	X7R:
		(add 100k ohm resistor)	1. 1812/10V~16V: D.F. ≤ 7%; 1812≥1KV: D.F. ≤ 5%
		* Before initial measurement (Class II only) : To	2.
		apply test voltage for 1hr at test temp. and then	
		set for 24±2 hrs at room temp.	
		* Measurement to be made after keeping at	
room temp. for 24±2 hrs.			
			</

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

Approval Sheet

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																				
7.	Operational Life MIL-STD-202 Method 108	* Test temp.: 125±3℃ * To apply voltage: full rated voltage. * Test time: 1000+24-0 hrs. * Before initial measurement (X7R only): Apply rated voltage for 1 hr at 125℃. Remove and let set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NPO: within ±3.0% or ±0.3pF whichever is larger X7R: within ±12.5%. * Q/D.F. value: NPO: More than 30pF, Q≥350 ; 10pF≤C<30pF, Q≥275+2.5C Less than 10pF, Q≥200+10C X7R: 1. 1812/10V~16V: D.F. ≤ 7%; 1812≥1KV: D.F. ≤ 5% 2.																																				
			<table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805/X7R > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 5%</td><td>≤ 20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 5%</td><td>≤ 10% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 14% 0603 ≥ 0.33μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 5%</td><td>≤ 20% 0402 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.022μF; 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>10V</td><td>≤ 7.5%</td><td>≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤ 15%</td><td>≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td>≤ 30% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>4V</td><td>≤ 20%</td><td>--</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF	≤ 7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 3%	≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF	≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805/X7R > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	35V	≤ 5%	≤ 20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 14% 0603 ≥ 0.33μF	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	16V	≤ 5%	≤ 20% 0402 ≥ 0.47μF	≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	≤ 15% 0201 ≥ 0.022μF; 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	6.3V	≤ 15%	≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF	≤ 30% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	4V	≤ 20%	--
			Rated vol.	D.F. ≤	Exception of D.F. ≤																																		
			≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF																																		
					≤ 7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																		
					≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF																																		
			50V	≤ 3%	≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																		
					≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																		
					≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805/X7R > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																		
			35V	≤ 5%	≤ 20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																		
25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																					
		≤ 14% 0603 ≥ 0.33μF																																					
		≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																					
16V	≤ 5%	≤ 20% 0402 ≥ 0.47μF																																					
		≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																					
		≤ 15% 0201 ≥ 0.022μF; 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																					
10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																					
6.3V	≤ 15%	≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF																																					
		≤ 30% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																					
		4V	≤ 20%	--																																			
* I.R.: ≥1GΩ or RxC≥50Ω·F whichever is smaller. Class II (X7R)																																							
<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥ 100V: All X7R; 1210≥3.3μF</td><td rowspan="7">1GΩ or RxC ≥ 10 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0201≥0.1uF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0201≥0.1uF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr></table>		Rated voltage	Insulation Resistance	≥ 100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥ 10 Ω·F whichever is smaller.	50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0201≥0.1uF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1uF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V; Size≥1812																												
Rated voltage	Insulation Resistance																																						
≥ 100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥ 10 Ω·F whichever is smaller.																																						
50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																							
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																							
25V: 0201≥0.1uF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																							
16V: 0201≥0.1uF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																							
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																							
6.3V; 4V; Size≥1812																																							
8.	External Visual MIL-STD-883 Method 2009	Visual inspection	No remarkable defect.																																				
9.	Physical Dimension JESD22 Method JB-100	Using by calipers	Within the specified dimensions																																				

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																																								
10.	Resistance to Solvents MIL-STD-202 Method 215	* Temperature: 25±5℃ * Time: 3+0.5/-0 min. * Solvent: Iso-propyl alcohol.	* No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 10%</td><td>0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 10%</td><td>0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 3.5%</td><td>≤ 10%</td><td>0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤ 3.5%</td><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 7%</td><td>0603 ≥ 0.33μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 12.5%</td><td>0402 ≥ 0.47μF</td></tr><tr><td>16V</td><td>≤ 3.5%</td><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤ 5%</td><td>≤ 10%</td><td>0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td>6.3V</td><td>≤ 10%</td><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>4V</td><td>≤ 15%</td><td>---</td><td>---</td></tr></table> * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥ 100V: All X7R</td><td rowspan="6">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td><td rowspan="9">RxC≥50 Ω-F.</td></tr><tr><th>Rated voltage</th></tr><tr><td>100V: 1210≥3.3μF</td></tr><tr><td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td></tr><tr><td>35V: 0603≥1μF;</td></tr><tr><td>25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF</td></tr><tr><td>16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF</td></tr><tr><td>10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF</td></tr><tr><td>6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF</td></tr><tr><td>4V: 0603≥22μF; 0805≥47μF; 1206≥100μF</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF	≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01uF; 1210 ≥ 3.3μF	≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 7%	0603 ≥ 0.33μF	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 12.5%	0402 ≥ 0.47μF	16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	10V	≤ 5%	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF	6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	4V	≤ 15%	---	---	Rated voltage	Insulation Resistance	≥ 100V: All X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.	50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V; Size≥1812	RxC≥50 Ω-F.	Rated voltage	100V: 1210≥3.3μF	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF	16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF	10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF	6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF	4V: 0603≥22μF; 0805≥47μF; 1206≥100μF
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																									
≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF																																																																								
		≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																																																								
		≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF																																																																								
50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																																								
		≤ 5%	0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																																																								
		≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																								
35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																								
25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																																																								
		≤ 7%	0603 ≥ 0.33μF																																																																								
		≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																								
		≤ 12.5%	0402 ≥ 0.47μF																																																																								
16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																																																								
10V	≤ 5%	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																								
		≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF																																																																								
6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																																																								
4V	≤ 15%	---	---																																																																								
Rated voltage	Insulation Resistance																																																																										
≥ 100V: All X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.																																																																										
50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																																											
35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																																											
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																																											
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																																											
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																																											
6.3V; 4V; Size≥1812	RxC≥50 Ω-F.																																																																										
Rated voltage																																																																											
100V: 1210≥3.3μF																																																																											
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																																																																											
35V: 0603≥1μF;																																																																											
25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF																																																																											
16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF																																																																											
10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																																																											
6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF																																																																											
4V: 0603≥22μF; 0805≥47μF; 1206≥100μF																																																																											

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																									
11.	Mechanical Shock MIL-STD-202 Method 213	* Peak value: 1500g's. * Wave: 1/2 sine. * Velocity: 15.4 ft/sec * Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks)	* No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R:<table><thead><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr></thead><tbody><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 10% 0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 5% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 10% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 3.5%</td><td>≤ 10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤ 3.5%</td><td>≤ 5% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 7% 0603 ≥ 0.33μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 12.5% 0402 ≥ 0.47μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤ 3.5%</td><td>≤ 5% 0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤ 5%</td><td>≤ 10% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≤ 10%</td><td>≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>≤ 20% 0402 ≥ 2.2μF</td></tr><tr><td>4V</td><td>≤ 15%</td><td>---</td></tr></tbody></table> * I.R.: ≥10GΩ or RxC≥500Ω·F whichever is smaller. Class II (X7R)<table><thead><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr></thead><tbody><tr><td>≥ 100V: All X7R</td><td rowspan="6">10GΩ or RxC≥100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td><td rowspan="10">RxC≥50 Ω·F.</td></tr><tr><th>Rated voltage</th></tr><tr><td>100V: 1210≥3.3μF</td></tr><tr><td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td></tr><tr><td>35V: 0603≥1μF;</td></tr><tr><td>25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF</td></tr><tr><td>16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF</td></tr><tr><td>10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF</td></tr><tr><td>6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF</td></tr><tr><td>4V: 0603≥22μF; 0805≥47μF; 1206≥100μF</td></tr></tbody></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 100V	≤ 2.5%	≤ 3% 1206 ≥ 0.47μF	≤ 5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 10% 0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 2.5%	≤ 3% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 5% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF	≤ 10% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	35V	≤ 3.5%	≤ 10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 3.5%	≤ 5% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 7% 0603 ≥ 0.33μF	≤ 10% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 12.5% 0402 ≥ 0.47μF	16V	≤ 3.5%	≤ 5% 0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	≤ 10% 0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	10V	≤ 5%	≤ 10% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 1μF	6.3V	≤ 10%	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	≤ 20% 0402 ≥ 2.2μF	4V	≤ 15%	---	Rated voltage	Insulation Resistance	≥ 100V: All X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.	50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V; Size≥1812	RxC≥50 Ω·F.	Rated voltage	100V: 1210≥3.3μF	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF	16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF	10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF	6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF	4V: 0603≥22μF; 0805≥47μF; 1206≥100μF
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																										
≥ 100V	≤ 2.5%	≤ 3% 1206 ≥ 0.47μF																																																										
		≤ 5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																																										
		≤ 10% 0805 > 0.22μF; 1210 ≥ 3.3μF																																																										
50V	≤ 2.5%	≤ 3% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																										
		≤ 5% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																																										
		≤ 10% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																										
35V	≤ 3.5%	≤ 10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																										
25V	≤ 3.5%	≤ 5% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																																										
		≤ 7% 0603 ≥ 0.33μF																																																										
		≤ 10% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																										
		≤ 12.5% 0402 ≥ 0.47μF																																																										
16V	≤ 3.5%	≤ 5% 0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																																										
		≤ 10% 0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																										
10V	≤ 5%	≤ 10% 0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																																										
		≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 1μF																																																										
6.3V	≤ 10%	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																																										
		≤ 20% 0402 ≥ 2.2μF																																																										
4V	≤ 15%	---																																																										
Rated voltage	Insulation Resistance																																																											
≥ 100V: All X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.																																																											
50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																												
35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																												
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																												
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																												
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																												
6.3V; 4V; Size≥1812	RxC≥50 Ω·F.																																																											
Rated voltage																																																												
100V: 1210≥3.3μF																																																												
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																																																												
35V: 0603≥1μF;																																																												
25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF																																																												
16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF																																																												
10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																																												
6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF																																																												
4V: 0603≥22μF; 0805≥47μF; 1206≥100μF																																																												

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																																														
12.	Vibration MIL-STD-202 Method 204	* Vibration frequency: 10~2000 Hz/min. (5g's for 20 min) * Total amplitude: 1.5mm * 12 cycles each of 3 orientations (36 times)	* No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: NPO:Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: <table><thead><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr></thead><tbody><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF</td></tr><tr><td>≤ 10%</td><td>0805 > 0.22μF;1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>0201(50V);0603 ≥ 0.047μF; 0805 ≥ 0.18μF;1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01uF;1210 ≥ 3.3μF</td></tr><tr><td>≤ 10%</td><td>0402 ≥ 0.012μF;0603>0.1μF; 0805>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 3.5%</td><td>≤ 10%</td><td>0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 3.5%</td><td>≤ 5%</td><td>0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF</td></tr><tr><td>≤ 7%</td><td>0603 ≥ 0.33μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.1μF;0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 3.5%</td><td>≤ 12.5%</td><td>0402 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01μF;0402 ≥ 0.033μF;0603 ≥ 0.15μF; 0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.022μF; 0402 ≥ 0.15uF;0603>0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td>10V</td><td>≤ 5%</td><td>≤ 10%</td><td>0201 ≥ 0.012μF;0402 ≥ 0.15μF;0603 ≥ 0.33μF; 0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤ 10%</td><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF</td></tr><tr><td>≤ 20%</td><td>0402 ≥ 2.2μF</td></tr><tr><td>4V</td><td>≤ 15%</td><td>---</td><td>---</td></tr></tbody></table> * I.R.: ≥10GΩ or RxC≥500Ω·F whichever is smaller. Class II (X7R) <table><thead><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr></thead><tbody><tr><td>≥ 100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr><tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF; 0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td></td><td rowspan="8">RxC≥50 Ω·F.</td></tr><tr><td>100V: 1210≥3.3μF</td></tr><tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr><tr><td>35V: 0603≥1μF;</td></tr><tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr><tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr><tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr><tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr><tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr></tbody></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF	≤ 5%	0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF	≤ 10%	0805 > 0.22μF;1210 ≥ 3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V);0603 ≥ 0.047μF; 0805 ≥ 0.18μF;1206 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01uF;1210 ≥ 3.3μF	≤ 10%	0402 ≥ 0.012μF;0603>0.1μF; 0805>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF	35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF	25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF	≤ 7%	0603 ≥ 0.33μF	≤ 10%	0201 ≥ 0.1μF;0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF; 1210 ≥ 22μF	16V	≤ 3.5%	≤ 12.5%	0402 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01μF;0402 ≥ 0.033μF;0603 ≥ 0.15μF; 0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF;0603>0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	10V	≤ 5%	≤ 10%	0201 ≥ 0.012μF;0402 ≥ 0.15μF;0603 ≥ 0.33μF; 0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF	6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF	≤ 15%	0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF	≤ 20%	0402 ≥ 2.2μF	4V	≤ 15%	---	---	Rated voltage	Insulation Resistance	≥ 100V: All X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF	25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF; 0805≥2.2μF;1206≥10μF;1210≥47μF	10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V; 4V; Size≥1812	Rated voltage	Insulation Resistance		RxC≥50 Ω·F.	100V: 1210≥3.3μF	50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF	16V: 0603≥10μF;0402≥1μF;0201≥0.22μF	10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF	6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF	4V: 0603≥22μF;0805≥47μF;1206≥100μF
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																															
≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF																																																																														
		≤ 5%	0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF																																																																														
		≤ 10%	0805 > 0.22μF;1210 ≥ 3.3μF																																																																														
50V	≤ 2.5%	≤ 3%	0201(50V);0603 ≥ 0.047μF; 0805 ≥ 0.18μF;1206 ≥ 0.47μF																																																																														
		≤ 5%	0201 ≥ 0.01uF;1210 ≥ 3.3μF																																																																														
		≤ 10%	0402 ≥ 0.012μF;0603>0.1μF; 0805>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF																																																																														
35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF																																																																														
25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF																																																																														
		≤ 7%	0603 ≥ 0.33μF																																																																														
		≤ 10%	0201 ≥ 0.1μF;0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																														
16V	≤ 3.5%	≤ 12.5%	0402 ≥ 0.47μF																																																																														
		≤ 5%	0201 ≥ 0.01μF;0402 ≥ 0.033μF;0603 ≥ 0.15μF; 0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF																																																																														
		≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF;0603>0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																																														
10V	≤ 5%	≤ 10%	0201 ≥ 0.012μF;0402 ≥ 0.15μF;0603 ≥ 0.33μF; 0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF																																																																														
6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF																																																																														
		≤ 15%	0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF																																																																														
		≤ 20%	0402 ≥ 2.2μF																																																																														
4V	≤ 15%	---	---																																																																														
Rated voltage	Insulation Resistance																																																																																
≥ 100V: All X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.																																																																																
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																																																	
35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF																																																																																	
25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																																																																																	
16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF; 0805≥2.2μF;1206≥10μF;1210≥47μF																																																																																	
10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																																																	
6.3V; 4V; Size≥1812																																																																																	
Rated voltage	Insulation Resistance																																																																																
	RxC≥50 Ω·F.																																																																																
100V: 1210≥3.3μF																																																																																	
50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF																																																																																	
35V: 0603≥1μF;																																																																																	
25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF																																																																																	
16V: 0603≥10μF;0402≥1μF;0201≥0.22μF																																																																																	
10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF																																																																																	
6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF																																																																																	
4V: 0603≥22μF;0805≥47μF;1206≥100μF																																																																																	

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																																																
13.	Resistance to Soldering Heat MIL-STD-202 Method 210	* Solder temperature: 260±5℃ * Dipping time: 10±1 sec * Before initial measurement (X7R only): Perform 150+0/-10℃ for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NPO: within ±2.5% or 0.25pF whichever is larger X7R: within ±7.5% * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 10%</td><td>0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 10%</td><td>0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 3.5%</td><td>≤ 10%</td><td>0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤ 3.5%</td><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 7%</td><td>0603 ≥ 0.33μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 12.5%</td><td>0402 ≥ 0.47μF</td></tr><tr><td>16V</td><td>≤ 3.5%</td><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤ 5%</td><td>≤ 10%</td><td>0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td>6.3V</td><td>≤ 10%</td><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td rowspan="2"></td><td rowspan="2"></td><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>≤ 20%</td><td>0402 ≥ 2.2μF</td></tr><tr><td>4V</td><td>≤ 15%</td><td>---</td><td>---</td></tr></table> * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥ 100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td></td><td rowspan="8">RxC≥50 Ω-F.</td></tr><tr><td>100V: 1210≥3.3μF</td></tr><tr><td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td></tr><tr><td>35V: 0603≥1μF;</td></tr><tr><td>25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF</td></tr><tr><td>16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF</td></tr><tr><td>10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF</td></tr><tr><td>6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF</td></tr><tr><td>4V: 0603≥22μF; 0805≥47μF; 1206≥100μF</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF	≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01uF; 1210 ≥ 3.3μF	≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 7%	0603 ≥ 0.33μF	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 12.5%	0402 ≥ 0.47μF	16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	10V	≤ 5%	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 15%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF			≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	≤ 20%	0402 ≥ 2.2μF	4V	≤ 15%	---	---	Rated voltage	Insulation Resistance	≥ 100V: All X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.	50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V; Size≥1812	Rated voltage	Insulation Resistance		RxC≥50 Ω-F.	100V: 1210≥3.3μF	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF	16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF	10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF	6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF	4V: 0603≥22μF; 0805≥47μF; 1206≥100μF
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																	
≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF																																																																																
		≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																																																																
		≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF																																																																																
50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																																																
		≤ 5%	0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																																																																
		≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																																
35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																																
25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																																																																
		≤ 7%	0603 ≥ 0.33μF																																																																																
		≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																																
		≤ 12.5%	0402 ≥ 0.47μF																																																																																
16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																																																																
10V	≤ 5%	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																																
		≤ 15%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																																																																
6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF																																																																																
		≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																																																																
		≤ 20%	0402 ≥ 2.2μF																																																																																
4V	≤ 15%	---	---																																																																																
Rated voltage	Insulation Resistance																																																																																		
≥ 100V: All X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.																																																																																		
50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																																																			
35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																																																			
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																																																			
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																																																			
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																																																			
6.3V; 4V; Size≥1812																																																																																			
Rated voltage	Insulation Resistance																																																																																		
	RxC≥50 Ω-F.																																																																																		
100V: 1210≥3.3μF																																																																																			
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																																																																																			
35V: 0603≥1μF;																																																																																			
25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF																																																																																			
16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF																																																																																			
10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																																																																			
6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF																																																																																			
4V: 0603≥22μF; 0805≥47μF; 1206≥100μF																																																																																			

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																								
14	Thermal Shock MIL-STD-202 Method 107	* Conduct 300 cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>-55°C +0/-3</td><td>15±3</td></tr><tr><td>2</td><td>+125°C +3/-0</td><td>15±3</td></tr></table> * Max. transfer time: 20 sec. * Before initial measurement (X7R only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	Step	Temp. (°C)	Time (min.)	1	-55°C +0/-3	15±3	2	+125°C +3/-0	15±3	* No remarkable damage. * Cap change : NPO: within ±2.5% or 0.25pF whichever is larger X7R: within ±10.0% * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: 1. 1812/10V~16V: D.F. ≤ 7%; 1812≥1KV: D.F. ≤ 5% 2. <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF</td></tr><tr><td>≤ 20% 0805 > 0.22μF;1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.012μF;0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 5%</td><td>≤ 20% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤ 5%</td><td>≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF</td></tr><tr><td>≤ 14% 0603 ≥ 0.33μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.47μF</td></tr><tr><td>16V</td><td>≤ 5%</td><td>≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤ 7.5%</td><td>≤ 15% 0201 ≥ 0.022μF;0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.012μF;0402 ≥ 0.15μF; 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF</td></tr><tr><td>≤ 20% 0201 ≥ 0.1μF;0402 ≥ 1μF</td></tr><tr><td>6.3V</td><td>≤ 15%</td><td>≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF</td></tr><tr><td>4V</td><td>≤ 20%</td><td>---</td></tr></table> * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥ 100V: All X7R;1210≥3.3μF</td><td rowspan="6">1GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr><tr><td>25V: 0201≥0.1μF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr><tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td><td></td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF	≤ 7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF	≤ 20% 0805 > 0.22μF;1210 ≥ 3.3μF	50V	≤ 3%	≤ 6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF	≤ 10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF	≤ 20% 0402 ≥ 0.012μF;0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF	35V	≤ 5%	≤ 20% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF	25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF	≤ 14% 0603 ≥ 0.33μF	≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	≤ 20% 0402 ≥ 0.47μF	16V	≤ 5%	≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF	10V	≤ 7.5%	≤ 15% 0201 ≥ 0.022μF;0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	≤ 15% 0201 ≥ 0.012μF;0402 ≥ 0.15μF; 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF	≤ 20% 0201 ≥ 0.1μF;0402 ≥ 1μF	6.3V	≤ 15%	≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF	4V	≤ 20%	---	Rated voltage	Insulation Resistance	≥ 100V: All X7R;1210≥3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF	25V: 0201≥0.1μF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V; 4V; Size≥1812	
Step	Temp. (°C)	Time (min.)																																																									
1	-55°C +0/-3	15±3																																																									
2	+125°C +3/-0	15±3																																																									
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																									
≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF																																																									
		≤ 7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF																																																									
		≤ 20% 0805 > 0.22μF;1210 ≥ 3.3μF																																																									
50V	≤ 3%	≤ 6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF																																																									
		≤ 10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF																																																									
		≤ 20% 0402 ≥ 0.012μF;0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF;1210 ≥ 10μF																																																									
35V	≤ 5%	≤ 20% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF																																																									
25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF																																																									
		≤ 14% 0603 ≥ 0.33μF																																																									
		≤ 15% 0201 ≥ 0.1μF; 0402 ≥ 0.056μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																									
		≤ 20% 0402 ≥ 0.47μF																																																									
16V	≤ 5%	≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF																																																									
10V	≤ 7.5%	≤ 15% 0201 ≥ 0.022μF;0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																									
		≤ 15% 0201 ≥ 0.012μF;0402 ≥ 0.15μF; 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF																																																									
		≤ 20% 0201 ≥ 0.1μF;0402 ≥ 1μF																																																									
6.3V	≤ 15%	≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF																																																									
4V	≤ 20%	---																																																									
Rated voltage	Insulation Resistance																																																										
≥ 100V: All X7R;1210≥3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.																																																										
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																											
35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF																																																											
25V: 0201≥0.1μF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF																																																											
16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF																																																											
10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																											
6.3V; 4V; Size≥1812																																																											

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																						
15.	ESD AEC-Q200-002	Per AEC-Q200-002	* No remarkable damage.																																																						
			* Cap.: within the specified tolerance.																																																						
			* Q/D.F. value:																																																						
			NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.																																																						
			X7R:																																																						
			<table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 10%</td><td>0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01μF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 10%</td><td>0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>35V</td><td>≤ 3.5%</td><td>≤ 10%</td><td>0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 3.5%</td><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 7%</td><td>0603 ≥ 0.33μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 3.5%</td><td>≤ 12.5%</td><td>0402 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.022μF; 0402 ≥ 0.15μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤ 5%</td><td>≤ 10%</td><td>0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td>6.3V</td><td>≤ 10%</td><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>4V</td><td>≤ 15%</td><td>≤ 20%</td><td>0402 ≥ 2.2μF</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF	≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01μF; 1210 ≥ 3.3μF	≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 7%	0603 ≥ 0.33μF	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	16V	≤ 3.5%	≤ 12.5%	0402 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	10V	≤ 5%	≤ 10%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF	6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	4V	≤ 15%	≤ 20%	0402 ≥ 2.2μF
			Rated vol.	D.F. ≤	Exception of D.F. ≤																																																				
			≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF																																																			
					≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																																			
					≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF																																																			
50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																						
		≤ 5%	0201 ≥ 0.01μF; 1210 ≥ 3.3μF																																																						
		≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																						
35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																						
25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																																						
		≤ 7%	0603 ≥ 0.33μF																																																						
		≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																						
16V	≤ 3.5%	≤ 12.5%	0402 ≥ 0.47μF																																																						
		≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																																						
		≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																						
10V	≤ 5%	≤ 10%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																																						
		≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF																																																						
6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																																						
4V	≤ 15%	≤ 20%	0402 ≥ 2.2μF																																																						
* I.R.: ≥10GΩ or RxC≥500Ω·F whichever is smaller.																																																									
Class II (X7R)																																																									
<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥ 100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr><tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr><tr><td colspan="2">Rated voltage</td><td>Insulation Resistance</td></tr><tr><td colspan="2"></td><td rowspan="7">RxC≥50 Ω·F.</td></tr><tr><td colspan="2">100V: 1210≥3.3μF</td></tr><tr><td colspan="2">50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr><tr><td colspan="2">35V: 0603≥1μF;</td></tr><tr><td colspan="2">25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr><tr><td colspan="2">16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr><tr><td colspan="2">10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr><tr><td colspan="2">6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr><tr><td colspan="2">4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr></table>			Rated voltage	Insulation Resistance	≥ 100V: All X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF	25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF	10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF	6.3V; 4V; Size≥1812	Rated voltage		Insulation Resistance			RxC≥50 Ω·F.	100V: 1210≥3.3μF		50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF		35V: 0603≥1μF;		25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF		16V: 0603≥10μF;0402≥1μF;0201≥0.22μF		10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF		6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF		4V: 0603≥22μF;0805≥47μF;1206≥100μF																								
Rated voltage	Insulation Resistance																																																								
≥ 100V: All X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.																																																								
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																									
35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF																																																									
25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																																																									
16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF																																																									
10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF																																																									
6.3V; 4V; Size≥1812																																																									
Rated voltage		Insulation Resistance																																																							
		RxC≥50 Ω·F.																																																							
100V: 1210≥3.3μF																																																									
50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF																																																									
35V: 0603≥1μF;																																																									
25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF																																																									
16V: 0603≥10μF;0402≥1μF;0201≥0.22μF																																																									
10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF																																																									
6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF																																																									
4V: 0603≥22μF;0805≥47μF;1206≥100μF																																																									
16.	Solderability J-STD-002 JESD22-B102E	* Condition A	All terminations shall exhibit a continuous solder coating free from defects from a minimum of 75% of the critical surface area of any individual termination.																																																						
		Un-mounted chips 4hrs / 155°C*dry then completely immersed for 5±0.5 sec in solder bath at 235±5°C.																																																							
		* Condition B																																																							
		Un-mounted chips steam 8 hrs then completely immersed for 10±1sec in solder bath at 215+5/-0°C.																																																							
		* Condition C																																																							
		Un-mounted chips steam 8 hrs then completely immersed for 10±1 sec. in solder bath at 260+0/-5°C.																																																							

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																																							
17.	Electrical Characterization	* Capacitance * Q/ D.F. (Dissipation Factor) *Test temp.: Room Temperature. Class I: (NP0) Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10% Class II: (X7R) Cap ≤10μF, 1.0±0.2Vrms · 1KHz±10% Cap> 10μF, 0.5±0.2Vrms · 120Hz±20% * Insulation Resistance * Test temp.: Room Temperature. * Test voltage: ≤100V:To apply rated voltage for max. 120 sec. ≥200V:To apply rated voltage (Max.500V) for 60 sec. * Dielectric Strength To apply voltage: <table><tr><td>≤100</td><td>≥2.5 times VDC</td></tr><tr><td>200V~300V</td><td>≥2 times VDC</td></tr><tr><td>400V~450V</td><td>≥1.2 times VDC</td></tr><tr><td>500V~999V</td><td>≥1.5 times VDC</td></tr><tr><td>1000V~3000V</td><td>≥1.2 times VDC</td></tr></table> , duration 1~5 sec, charge and discharge current less than 50mA. * Temperature Coefficient (with no electrical load) Operation temperature: -55~125℃ at 25℃	≤100	≥2.5 times VDC	200V~300V	≥2 times VDC	400V~450V	≥1.2 times VDC	500V~999V	≥1.5 times VDC	1000V~3000V	≥1.2 times VDC	* Capacitance within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥100V</td><td rowspan="3">≤2.5%</td><td>≤3% 1206 ≥0.47μF</td></tr><tr><td>≤5% 0603 ≥0.068μF;0805 ≥0.1μF;1206 ≥1μF;1210 ≥2.2μF</td></tr><tr><td>≤10% 0805 > 0.22μF;1210 ≥3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤2.5%</td><td>≤3% 0201(50V);0603 ≥0.047μF; 0805 ≥0.18μF;1206 ≥0.47μF</td></tr><tr><td>≤5% 0201 ≥0.01uF;1210 ≥3.3μF</td></tr><tr><td>≤10% 0402 ≥0.012μF;0603>0.1μF; 0805>0.47μF; 1206 ≥2.2μF;1210 ≥10μF</td></tr><tr><td>35V</td><td>≤3.5%</td><td>≤10% 0603 ≥1μF;0805≥2.2μF;1206 ≥2.2μF;1210 ≥10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤3.5%</td><td>≤5% 0201 ≥0.01μF;0805 ≥1μF;1210 ≥10μF</td></tr><tr><td>≤7% 0603 ≥0.33μF</td></tr><tr><td>≤10% 0201 ≥0.1μF;0402 ≥0.056μF;0603 ≥0.47μF; 0805 ≥2.2μF;1206 ≥4.7μF; 1210 ≥22μF</td></tr><tr><td>≤12.5% 0402 ≥0.47μF</td></tr><tr><td>16V</td><td>≤3.5%</td><td>≤5% 0201 ≥0.01μF;0402 ≥0.033μF;0603 ≥0.15μF; 0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤5%</td><td>≤10% 0201 ≥0.022μF; 0402 ≥0.15uF;0603>0.47μF; 0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF</td></tr><tr><td>≤15% 0201 ≥0.012μF;0402 ≥0.15μF;0603 ≥0.33μF; 0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF</td></tr><tr><td>6.3V</td><td>≤10%</td><td>≤15% 0201 ≥0.1μF; 0402 ≥1μF;0603 ≥10μF; 0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF</td></tr><tr><td>4V</td><td>≤15%</td><td>≤20% 0402 ≥2.2μF</td></tr><tr><td></td><td></td><td>---</td></tr></table> * IR. ≥10GΩ or RxC≥500Ω-F whichever is smaller. Class II (X7R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>≥100V: All X7R</td><td rowspan="6">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr><tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF; 0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td><td></td></tr><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: 1210≥3.3μF</td><td rowspan="7">RxC≥50 Ω-F.</td></tr><tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr><tr><td>35V: 0603≥1μF;</td></tr><tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr><tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr><tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr><tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr><tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td><td></td></tr></table> * Dielectric strength No evidence of damage or flash over during test. * Temperature Coefficient Capacitance Change: NPO: Within ±30ppm/℃ X7R: Within ±15%	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥100V	≤2.5%	≤3% 1206 ≥0.47μF	≤5% 0603 ≥0.068μF;0805 ≥0.1μF;1206 ≥1μF;1210 ≥2.2μF	≤10% 0805 > 0.22μF;1210 ≥3.3μF	50V	≤2.5%	≤3% 0201(50V);0603 ≥0.047μF; 0805 ≥0.18μF;1206 ≥0.47μF	≤5% 0201 ≥0.01uF;1210 ≥3.3μF	≤10% 0402 ≥0.012μF;0603>0.1μF; 0805>0.47μF; 1206 ≥2.2μF;1210 ≥10μF	35V	≤3.5%	≤10% 0603 ≥1μF;0805≥2.2μF;1206 ≥2.2μF;1210 ≥10μF	25V	≤3.5%	≤5% 0201 ≥0.01μF;0805 ≥1μF;1210 ≥10μF	≤7% 0603 ≥0.33μF	≤10% 0201 ≥0.1μF;0402 ≥0.056μF;0603 ≥0.47μF; 0805 ≥2.2μF;1206 ≥4.7μF; 1210 ≥22μF	≤12.5% 0402 ≥0.47μF	16V	≤3.5%	≤5% 0201 ≥0.01μF;0402 ≥0.033μF;0603 ≥0.15μF; 0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF	10V	≤5%	≤10% 0201 ≥0.022μF; 0402 ≥0.15uF;0603>0.47μF; 0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF	≤15% 0201 ≥0.012μF;0402 ≥0.15μF;0603 ≥0.33μF; 0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF	6.3V	≤10%	≤15% 0201 ≥0.1μF; 0402 ≥1μF;0603 ≥10μF; 0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF	4V	≤15%	≤20% 0402 ≥2.2μF			---	Rated voltage	Insulation Resistance	≥100V: All X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF	25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF; 0805≥2.2μF;1206≥10μF;1210≥47μF	10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V; 4V; Size≥1812		Rated voltage	Insulation Resistance	100V: 1210≥3.3μF	RxC≥50 Ω-F.	50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF	16V: 0603≥10μF;0402≥1μF;0201≥0.22μF	10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF	6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF	4V: 0603≥22μF;0805≥47μF;1206≥100μF	
≤100	≥2.5 times VDC																																																																									
200V~300V	≥2 times VDC																																																																									
400V~450V	≥1.2 times VDC																																																																									
500V~999V	≥1.5 times VDC																																																																									
1000V~3000V	≥1.2 times VDC																																																																									
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																								
≥100V	≤2.5%	≤3% 1206 ≥0.47μF																																																																								
		≤5% 0603 ≥0.068μF;0805 ≥0.1μF;1206 ≥1μF;1210 ≥2.2μF																																																																								
		≤10% 0805 > 0.22μF;1210 ≥3.3μF																																																																								
50V	≤2.5%	≤3% 0201(50V);0603 ≥0.047μF; 0805 ≥0.18μF;1206 ≥0.47μF																																																																								
		≤5% 0201 ≥0.01uF;1210 ≥3.3μF																																																																								
		≤10% 0402 ≥0.012μF;0603>0.1μF; 0805>0.47μF; 1206 ≥2.2μF;1210 ≥10μF																																																																								
35V	≤3.5%	≤10% 0603 ≥1μF;0805≥2.2μF;1206 ≥2.2μF;1210 ≥10μF																																																																								
25V	≤3.5%	≤5% 0201 ≥0.01μF;0805 ≥1μF;1210 ≥10μF																																																																								
		≤7% 0603 ≥0.33μF																																																																								
		≤10% 0201 ≥0.1μF;0402 ≥0.056μF;0603 ≥0.47μF; 0805 ≥2.2μF;1206 ≥4.7μF; 1210 ≥22μF																																																																								
		≤12.5% 0402 ≥0.47μF																																																																								
16V	≤3.5%	≤5% 0201 ≥0.01μF;0402 ≥0.033μF;0603 ≥0.15μF; 0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF																																																																								
10V	≤5%	≤10% 0201 ≥0.022μF; 0402 ≥0.15uF;0603>0.47μF; 0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF																																																																								
		≤15% 0201 ≥0.012μF;0402 ≥0.15μF;0603 ≥0.33μF; 0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF																																																																								
6.3V	≤10%	≤15% 0201 ≥0.1μF; 0402 ≥1μF;0603 ≥10μF; 0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF																																																																								
4V	≤15%	≤20% 0402 ≥2.2μF																																																																								

Rated voltage	Insulation Resistance																																																																									
≥100V: All X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.																																																																									
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																																										
35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF																																																																										
25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																																																																										
16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF; 0805≥2.2μF;1206≥10μF;1210≥47μF																																																																										
10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																																										
6.3V; 4V; Size≥1812																																																																										
Rated voltage	Insulation Resistance																																																																									
100V: 1210≥3.3μF	RxC≥50 Ω-F.																																																																									
50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF																																																																										
35V: 0603≥1μF;																																																																										
25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF																																																																										
16V: 0603≥10μF;0402≥1μF;0201≥0.22μF																																																																										
10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF																																																																										
6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF																																																																										
4V: 0603≥22μF;0805≥47μF;1206≥100μF																																																																										

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	AEC-Q200 Test Item	AEC-Q200 Test Condition	Requirements																																																																				
18.	Board Flex AEC-Q200-005	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 5 mm and then the pressure shall be maintained for 60±1 sec. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change : NPO: within ±5% or 0.5pF whichever is larger X7R: within ±12.5% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)																																																																				
19.	Terminal Strength AEC-Q200-006	* Pressurizing force : 2N (0201 & 0402), 10N(0603), 18N(≥0805). * Test time: 60±1 sec.	* No remarkable damage or removal of the terminations. * Capacitance within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. X7R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 10%</td><td>0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 2.5%</td><td>≤ 3%</td><td>0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 10%</td><td>0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤ 3.5%</td><td>≤ 10%</td><td>0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 7%</td><td>0603 ≥ 0.33μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 3.5%</td><td>≤ 10%</td><td>0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 12.5%</td><td>0402 ≥ 0.47μF</td></tr><tr><td>≤ 5%</td><td>0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 3.5%</td><td>≤ 10%</td><td>0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤ 5%</td><td>≤ 10%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF</td></tr><tr><td>≤ 15%</td><td>0402 ≥ 2.2μF</td></tr><tr><td>---</td><td></td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤ 10%</td><td>≤ 15%</td><td></td></tr><tr><td>≤ 20%</td><td></td></tr><tr><td>---</td><td></td></tr><tr><td rowspan="3">4V</td><td rowspan="3">≤ 15%</td><td>---</td><td></td></tr><tr><td>---</td><td></td></tr><tr><td>---</td><td></td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF	≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01uF; 1210 ≥ 3.3μF	≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 7%	0603 ≥ 0.33μF	25V	≤ 3.5%	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 12.5%	0402 ≥ 0.47μF	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	16V	≤ 3.5%	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 10%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF	10V	≤ 5%	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	≤ 15%	0402 ≥ 2.2μF	---		6.3V	≤ 10%	≤ 15%		≤ 20%		---		4V	≤ 15%	---		---		---	
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																					
≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF																																																																				
		≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																																																				
		≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF																																																																				
50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																																				
		≤ 5%	0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																																																				
		≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 > 0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																				
35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																				
		≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																																																				
		≤ 7%	0603 ≥ 0.33μF																																																																				
25V	≤ 3.5%	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																				
		≤ 12.5%	0402 ≥ 0.47μF																																																																				
		≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																																																				
16V	≤ 3.5%	≤ 10%	0201 ≥ 0.022μF; 0402 ≥ 0.15uF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																				
		≤ 10%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																																																				
		≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF																																																																				
10V	≤ 5%	≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF																																																																				
		≤ 15%	0402 ≥ 2.2μF																																																																				

6.3V	≤ 10%	≤ 15%																																																																					
		≤ 20%																																																																					

4V	≤ 15%	---																																																																					

20	Beam Load Test AEC-Q200-003	* Break strength test * Beam speed: 2.5±0.25 mm/sec	The chip endure following force * Chip length ≤2.5mm: Thickness >0.5mm (20N), ≤0.5mm (8N) * Chip length ≥3.2mm: Thickness ≥1.25mm (54.5N), <1.25mm (15N)																																																																				

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

APPENDIXES

■ Tape & reel dimensions

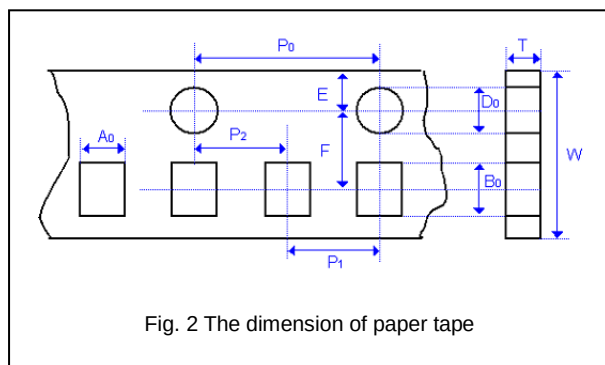


Fig. 2 The dimension of paper tape

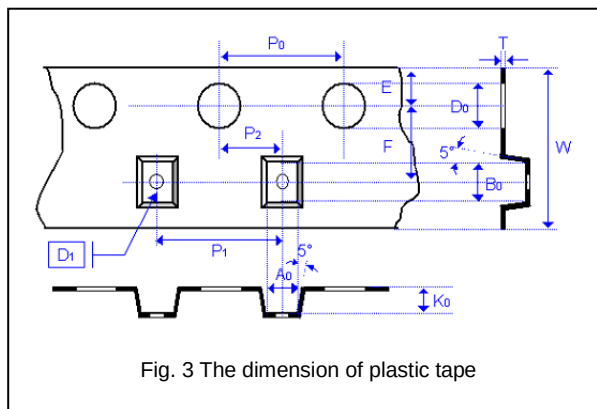


Fig. 3 The dimension of plastic tape

Size	0402	0603	0805			1206			1210			1812		
Thickness	N,E	S,H,X	A,H	B,T	D,I	B,T	C,J,D	G,P	T	C,D,G,K	M	D,F	G,K	M,U
A ₀	0.70 +/-0.20	1.05 +/-0.30	1.50 +/-0.20	1.50 +/-0.20	<1.80	2.00 +/-0.10	<2.00	<2.50	<3.05	<3.05	<3.20	<3.90	<3.90	<3.90
B ₀	1.20 +/-0.20	1.80 +/-0.30	2.30 +/-0.20	2.30 +/-0.20	<2.70	3.50 +/-0.10	<3.70	<4.00	<3.80	<3.80	<4.00	<5.30	<5.30	<5.30
T	≤0.80	≤1.20	≤1.15	≤1.20	0.23 +/-0.1	≤1.20	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1
K ₀	-	-	-	-	<2.50	-	<2.50	<2.50	<1.50	<2.50	<3.50	<2.50	<2.50	<3.50
W	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30
P ₀	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10
10xP ₀	40.00 +/-0.10	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20
P ₁	2.00 +/-0.05	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10
P ₂	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10
D ₀	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10
D ₁	-	-	-	-	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10
E	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10
F	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10


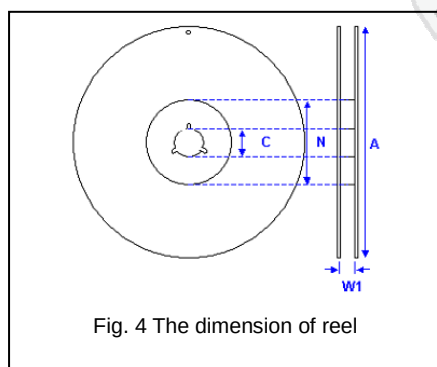


Fig. 4 The dimension of reel

Size	0201, 0402, 0603, 0805, 1206, 1210, 1812		
Reel size	7"	10"	13"
C	13.0±0.5	13.0±0.5	13.0±0.5
W ₁	10.0±1.5	10.0±1.5	10.0±1.5
A	178.0±2.0	250.0±2.0	330.0±2.0
N	60.0±1.0/-0	50 min	50 min


■ Peeling force (EIA-481)

Peel-off force should be in the range of 10 grams to 100 grams at a peel-off speed of 300±10 mm/min.

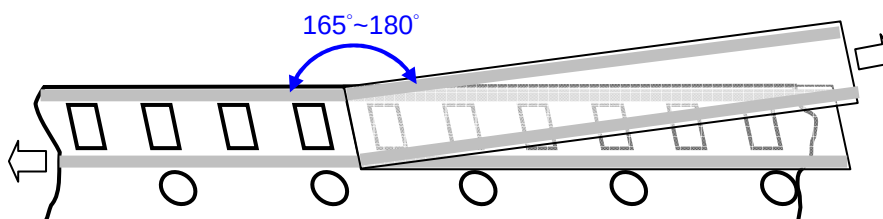

Multilayer Ceramic Capacitors

Example of customer label

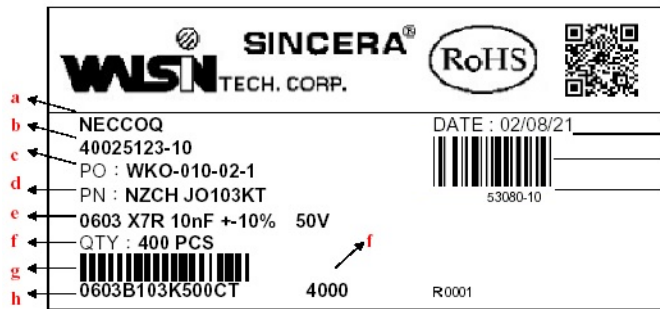

- a. Customer name
- b. WTC order series and item number
- c. Customer P/O
- d. Customer P/N
- e. Description of product
- f. Quantity
- g. Bar code including quantity & WTC P/N or customer
- h. WTC P/N
- i. Shipping date
- j. Order bar code including series and item numbers
- k. Serial number of label

*Customized label is available upon request

Constructions

No.	Name	X7R
①	Ceramic material	BaTiO ₃ based
②	Inner electrode	Ni
③	Termination	Inner layer
④		Middle layer
⑤		Outer layer

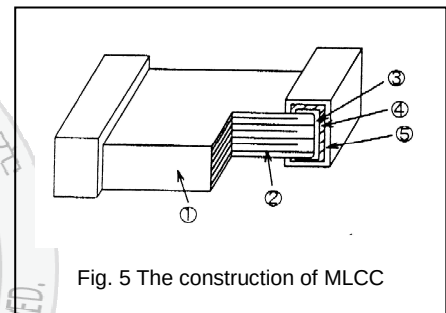


Fig. 5 The construction of MLCC

Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N_2 within oven are recommended.

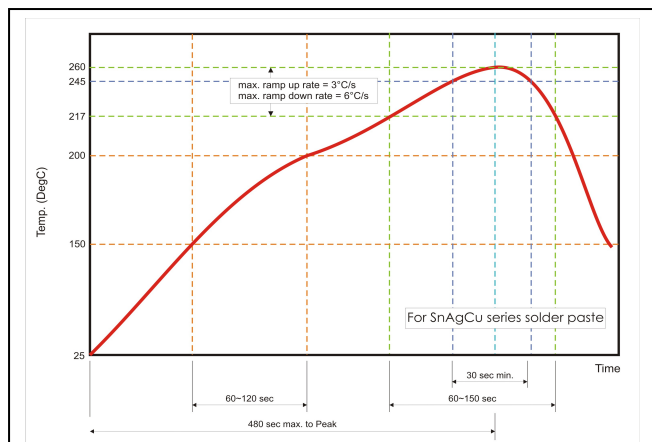


Fig. 6 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

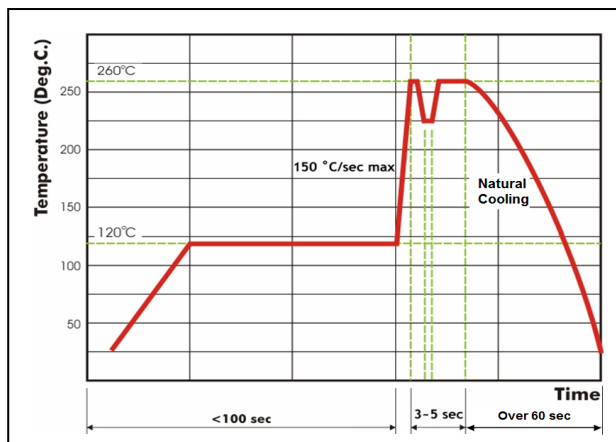


Fig. 7 Recommended wave soldering profile for SMT process with SnAgCu series solder.

