

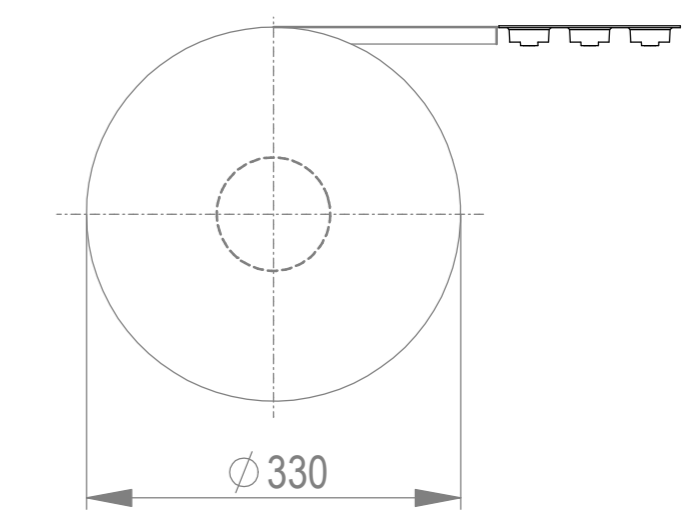


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3  
 tape on reel packaging according to DIN IEC 60286-3  
 Verpackungseinheit: 900 Stück  
 packaging unit: 900 pcs

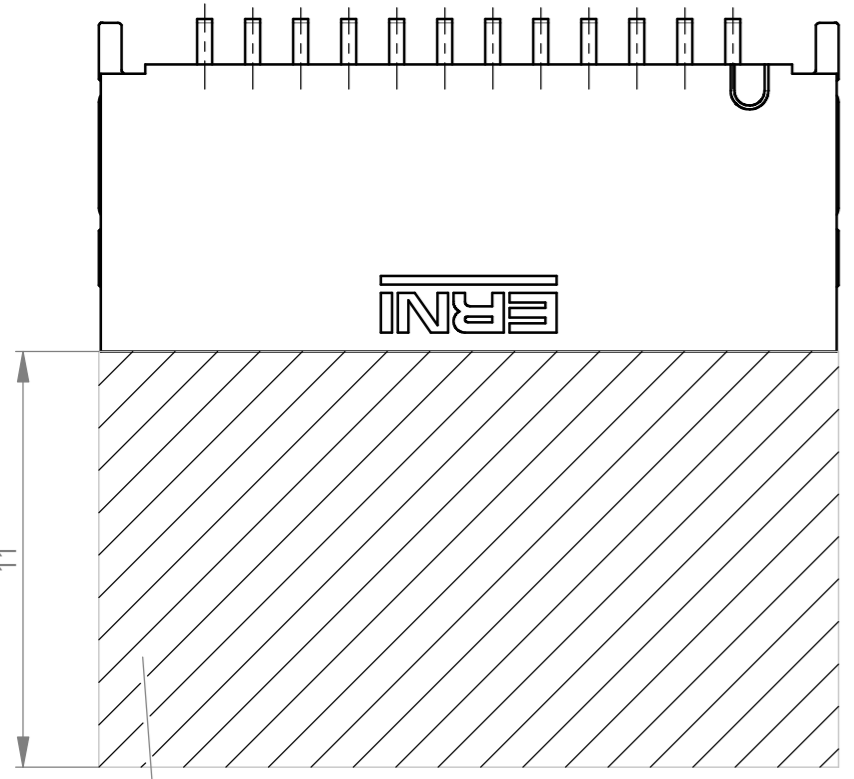


Abspulrichtung - reel off direction →

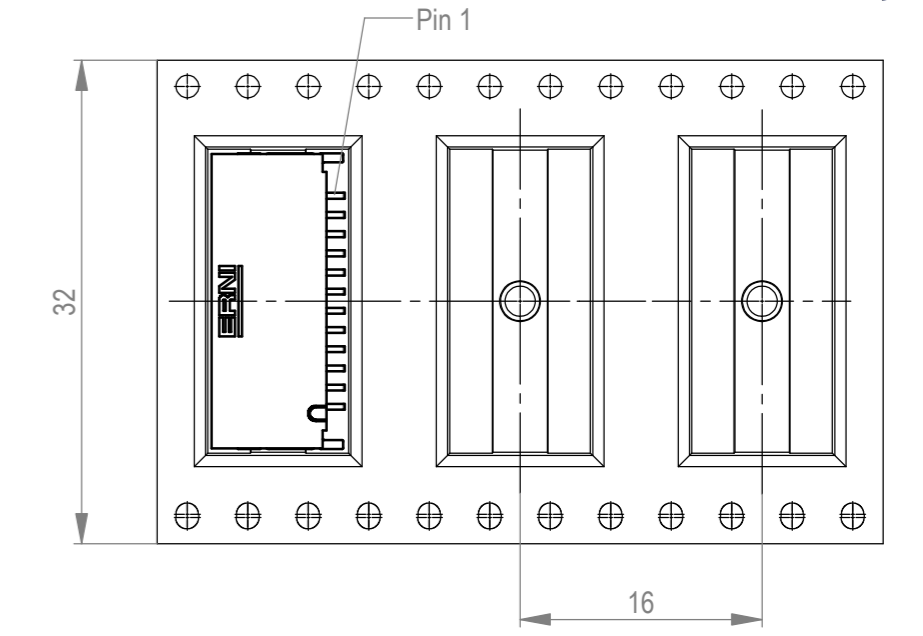

Sperrfläche für Leiterbahnen gültig bei Verwendung von Gegenstecker Federleiste 90° in IDC Ausführung  
 Restricted area for conductors valid for use by mating female connector 90° in IDC version

Layoutvorschlag  
 recommended layout

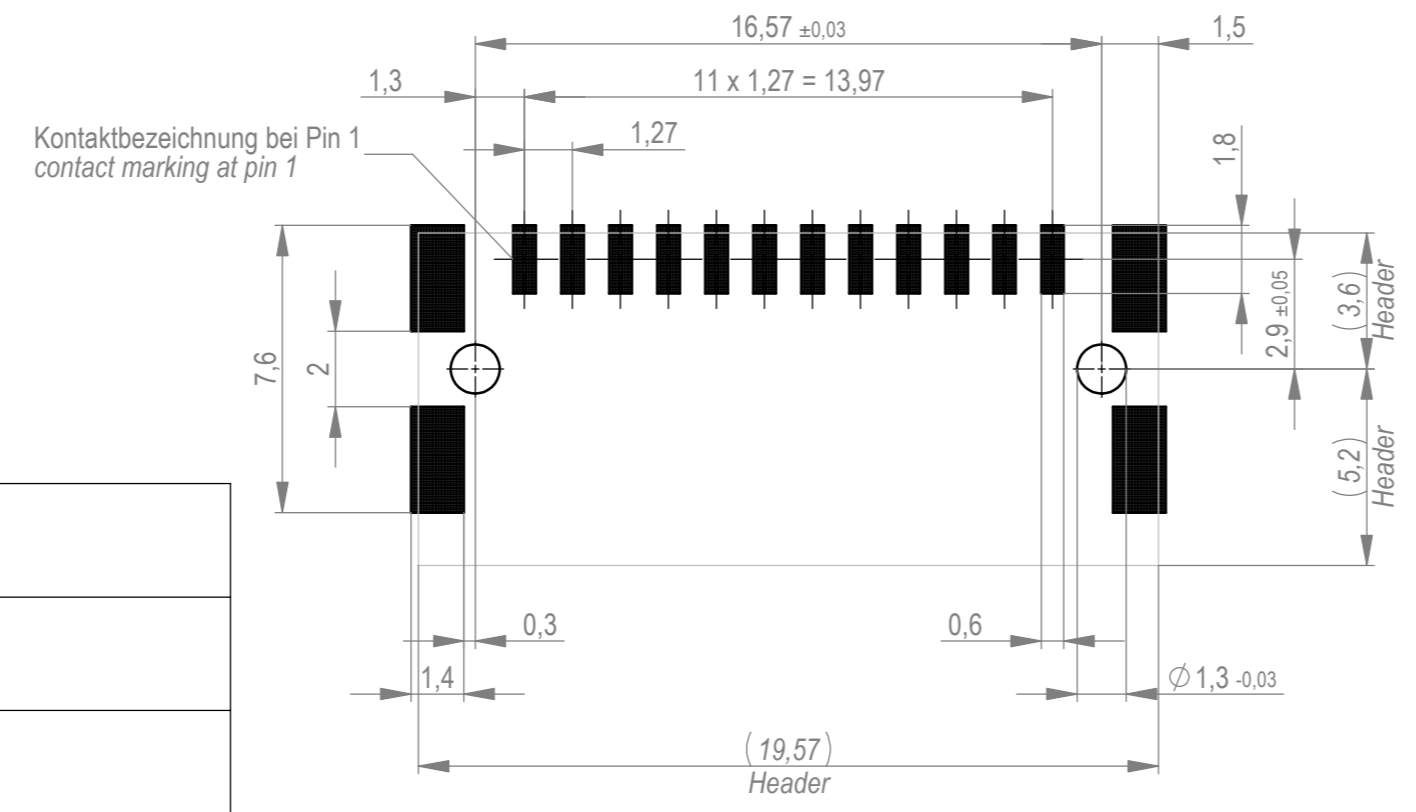

Anforderungsstufe 1  
 performance level 1  
 Kontaktbereich vergoldet  
 mating area gold plating  
 Anschlussbereich verzinkt 4-6 µm  
 terminal area 4-6 µm tin plating  
 Koplanarität der Anschlüsse ≤ 0,1 mm  
 coplanarity area of termination ≤ 0,1 mm

504308-E		rot red	2,25	
504307-E		grün green	2,25	
504306-E		blau blue	0,75	
504305-E		schwarz black	0,75	
Ident-Nr. part-no.	Codierung coding	Farbe colour	A	Bemerkung remark

Dimension no.	Tolerances ISO 2768-FH ISO 8015	Scale 5:1 Material
Customer drawing: This Drawing is a controlled Document.	Subject to modification without prior notice. Drawing will not be updated.	ERNI-MicroBridge Male Angeled SMT 12-pin C-504304-E
c1 Index	21.05.2023 Date	Class MCBA

Die deutsche Version dieser Zeichnung dient nur zur Erleichterung der Handhabung. Bei Abweichungen vom englischen Original gilt das englische Original. / This drawing has been created for convenience only and may deviate from the english original. / In case of any deviation the English version shall prevail. / In case of any deviation the English version shall prevail. / We reserve the right to change the design without notice. / All rights reserved for the event of the grant of a patent, utility model or design. / We reserve the right to change the design without notice. / All rights reserved for the event of the grant of a patent, utility model or design. / We reserve the right to change the design without notice. / All rights reserved for the event of the grant of a patent, utility model or design.