




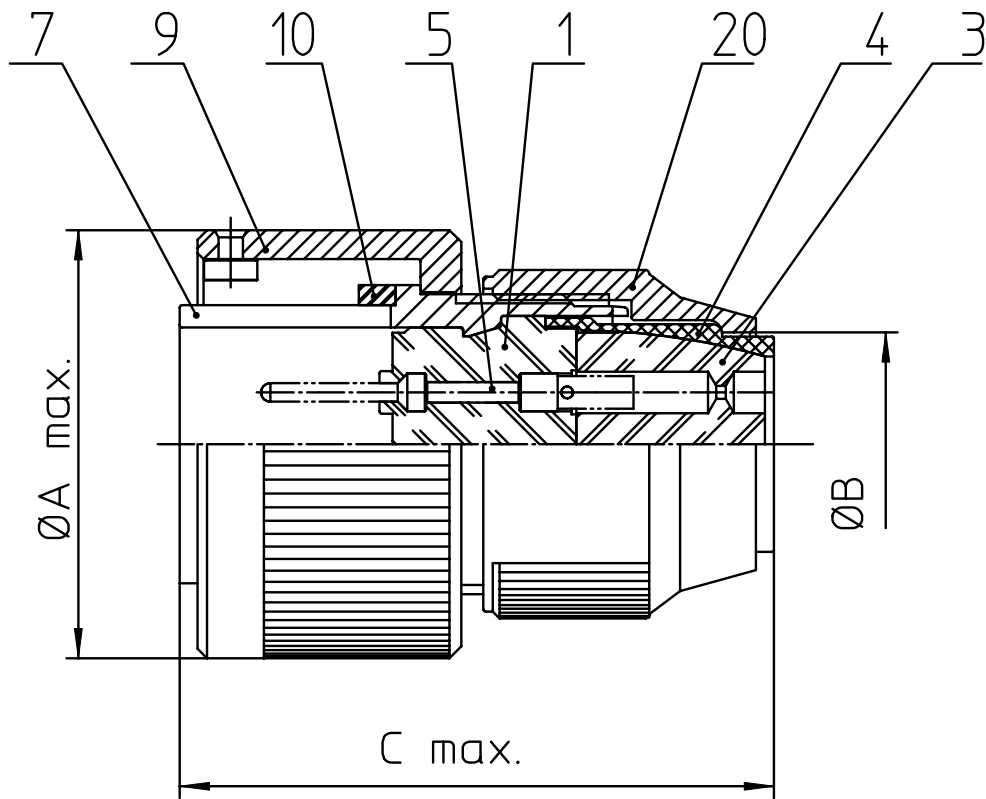

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B   | 31.6              |
| C   | 53                |

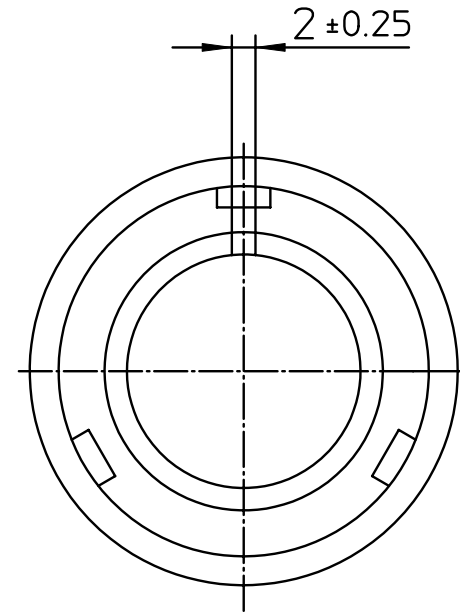

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICHTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT / CONTACT PIN           |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 20  | KURZES ENDGEHÄUSE / SHORT ENDBELL    |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                                |                                               |
|--------------------------------|-----------------------------------------------|
| <b>Material Specification:</b> |                                               |
| Shell Material:                | Aluminium alloy                               |
| Shell Plating:                 | Olive drab chromate over cadmium (conductive) |
| Insulator Material:            | CR-Elastomere                                 |
| Contact Material:              | Copper alloy                                  |
| Contact Plating:               | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description **CA3106R28-21P-B**  
Plug, straight  
Shortened light-weight endbell without cable clamp  
Solder Cup / Pin / Layout: 28-21

© All rights reserved. Reproduction or issue to third in any form  
whatever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 3468 21. Nov 23