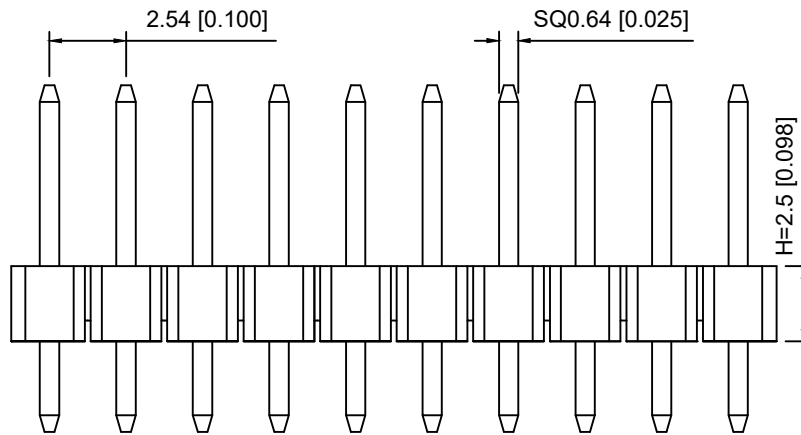
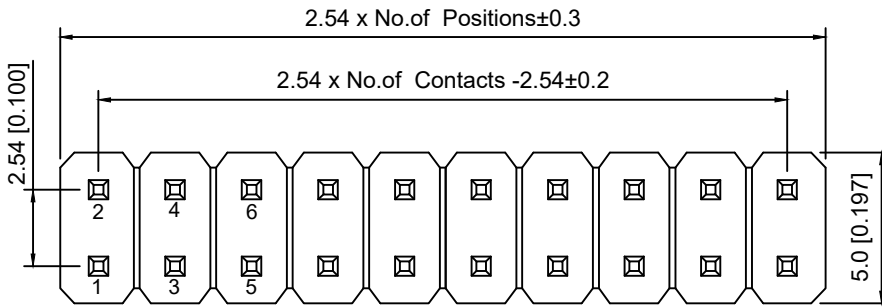


PCB LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40℃~+105℃

温度范围: -40℃~+105℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Wave soldering temperature:255±5℃, 10S

波峰焊温度: 255±5℃, 10S

X6521	W	V	- 2xXX	H - C50	D30	
①	②	③	④	⑤	⑥	⑦

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:V-Stright 180°
- 4.Row No.Pin No:2xXX-2x01~2x40P
- 5.Plastic Height:H=2.5mm
- 6.Pin Length:C=5.0mm
- 7.Pin Length:D=3.0mm

X6521WV-2xXXH-C50D30	PA6T	Brass	X6521F
PART NO	Material	Material(Pin)	Suitable XKB Female

								DSND		SCALE: N/A	MODEL TYPE: 2.54mm BTB Connector					
Δ X					ANGLAR	$\pm 5^{\circ}$		DWN		VIEW: 	PART NO.: X6521WV-2xXXH-C50D30					
Δ X					$4 < L \leq 16$	± 0.3		CHKD		UNIT: mm/in	DWG NO.: X-X6521WV-2xXXH-C50D30					
Δ X					$16 < L \leq 63$	± 0.4		APPD		SIZE: A4						
MARK	DESCRIPTION			DATE	REVISED	APPROVED					$L > 63$	± 0.5				
REVISIONS							UNSPECIFIED TOLERANCES					WEIGHT			SHEET	REVISION
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn															1/1	A0