

**F60655-000**

✓ ACTIVE

**RAYCHEM | RAYCHEM GelWrap**

TE Internal #: F60655-000

Joints & Splices, ANZPAC / EMEA / China, Cold Shrink / Cold Applied,  $\leq 1$  kV, Inline, Wrap-Around Splice Closure, RAYCHEM GelWrap[View on TE.com >](#)

Energy &amp; Power &gt; Power Cable Accessories &gt; Joints &amp; Splices

Joints & Splice Product Availability: **AMERICAS, ANZPAC, ASIA, China, EMEA**Joints & Splice Technology: **Cold Applied, Cold Shrink**Joints & Splice Voltage Class:  **$\leq 1$  kV**Joint & Splice Application Type: **Inline**Joints & Splice Product Type: **Wrap-Around Splice Closure**

## Features

### Product Type Features

Filler	PowerGel
Component Design	PowerGel Sealing Gel
Adhesive Coating	Silicone Gel
Joints & Splice Technology	Cold Applied, Cold Shrink
Joints & Splice Product Type	Wrap-Around Splice Closure
Closing Method	Snap

### Configuration Features

Number of Main Wires (Max)	1
----------------------------	---

### Electrical Characteristics

Joints & Splice Voltage Class	$\leq 1$ kV
-------------------------------	-------------

### Body Features

Flexibility	Semi-Flexible
Color	Black

### Mechanical Attachment

Mechanical Reinforcement	Cable Ties
--------------------------	------------

### Dimensions

Cable Diameter (Min) (Main)	4 mm
-----------------------------	------

Connector Opening	125 mm[5 in]
Sleeve Length	200 mm[8 in]
Application Diameter (Min)	4 mm[.15 in]
Application Diameter (Max)	18 mm[.7 in]
Cross-Section Range	4 – 95 mm <sup>2</sup>
Cable Cross-Section (Max) (Main)	95 mm <sup>2</sup>
Cable Cross-Section (Min) (Main)	4 mm <sup>2</sup>
Cable Diameter (Max) (Main)	18 mm
Joints & Splice Conductor Diameter	.15 – .7 mm[4 – 18 in]
Conductor Size	12 – 0000 AWG

### Usage Conditions

Environmental Resistance	Yes
Operating Temperature Range	-40 – 95 °C
Chemical Resistance	Motor Oil, Hydrochloric Acid, Sodium Chloride, Sodium Hydroxide

### Operation/Application

Emission Free	Yes
Thermal Resistance	Applicable for Low Temperatures, Applicable for High Temperatures, Flame-Retardant
Non-Toxic & Non-Corrosive Emission	Yes
Low Smoke Emission	Yes
Mechanical Resistance	Against Mechanical Impact
UV-Stabilized	Yes
Joint & Splice Application Type	Inline

### Industry Standards

CSA Certified	No
Standards	ANSI C119.1
UL Rating	No

### Product Availability

Joints & Splice Product Availability	AMERICAS, ANZPAC, ASIA, China, EMEA
--------------------------------------	-------------------------------------

### Packaging Features

Standard Pack	6
---------------	---

## Packaging Method

Pieces in Polybag

## Other

## Product Use

PowerGel-filled wraparound for LV splices and cable jacket repair

## Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

## EU RoHS Directive 2011/65/EU

Compliant

## EU ELV Directive 2000/53/EC

Compliant

## China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

## EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2023 (235)

Candidate List Declared Against: JUN 2016 (169)

Does not contain REACH SVHC

## Halogen Content

Low Halogen - Br, Cl, F, I  $< 900$  ppm per homogenous material. Also BFR/CFR/PVC Free

## Solder Process Capability

Not applicable for solder process capability


## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

TE Part # 093852-000  
GELWRAP-18/4-100(B6)TE Part # CB2009-000  
GELWRAP-18/4-150UL(B6)

## Also in the Series | RAYCHEM GelWrap

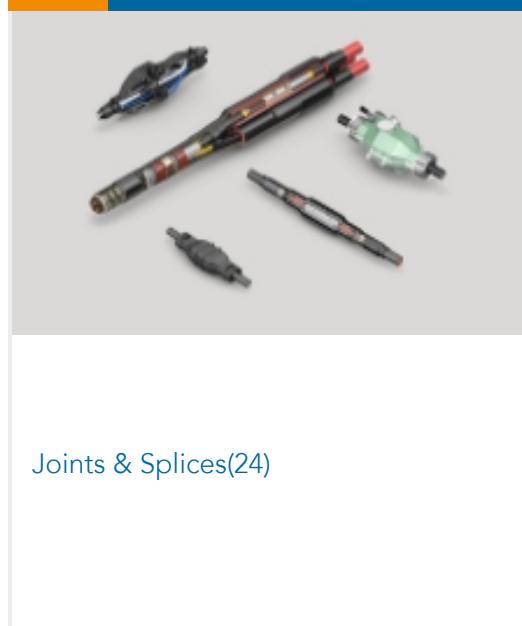

## Customers Also Bought



## Documents

### Product Drawings

[GELWRAP-18/4-200\(B6\)](#)

English

---

### Datasheets & Catalog Pages

[GELWRAP-WRAPAROUND-SLEEVE-CABLE-ACCESSORIES](#)

English

---

### Agency Approvals

[UL Report](#)

English