



Molded-plastic enclosure for surface mounting with EMERGENCY-STOP rotary operating mechanism 54 mm, with metric cable gland No UL/CSA approval

General technical data			
product designation		ISO surface-mounted housing with EMERGENCY OFF	
design of the product		Assembly	
material of the enclosure		plastic	
protection class IP of the enclosure		IP55	
product component transparent cover		No	
Installation/ mounting/ dimensions			
width	mm	85	
height	mm	155	
depth	mm	126	
Certificates/ approvals			
Declaration of Conformity	Test Certificates	Shipping Approval	other

[Miscellaneous](#)



[Special Test Certificate](#)





[Confirmation](#)

other

[Miscellaneous](#)

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1923-1FA00 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1923-1FA00 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV1923-1FA00 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1923-1FA00&lang=en

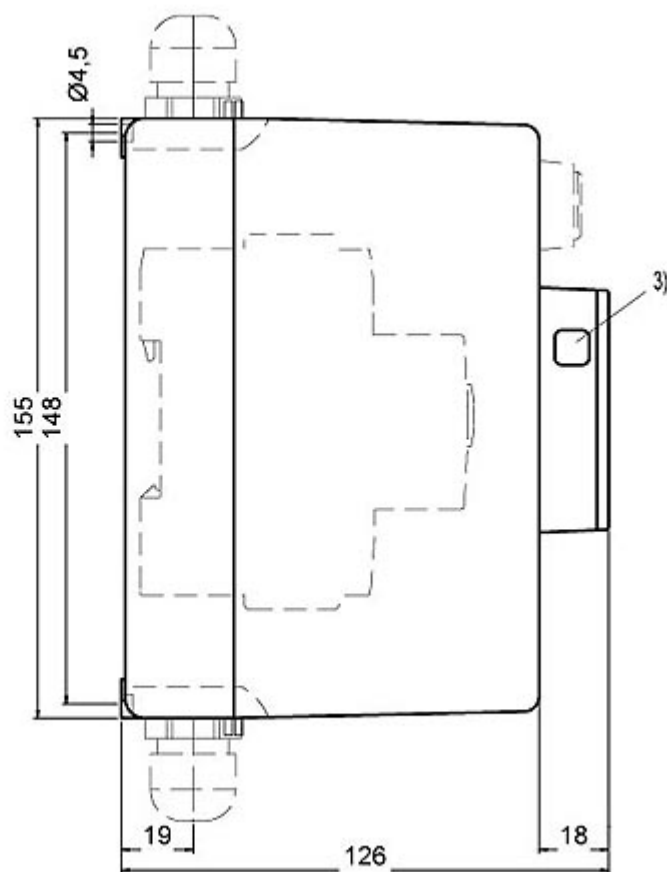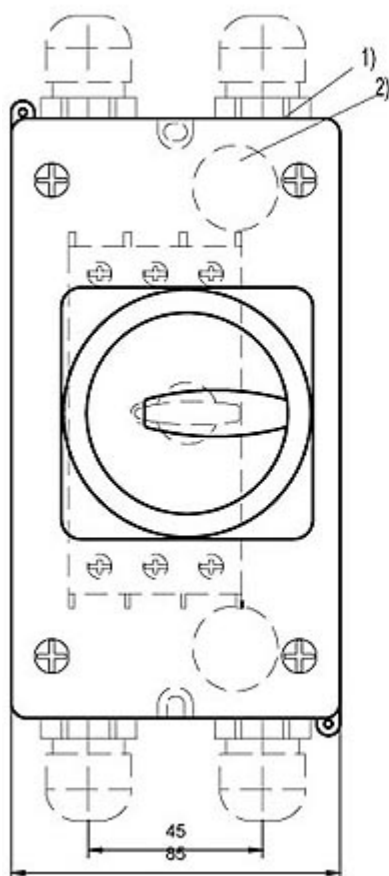

- 1) Ausbrechoeffnung fuer Verschraubung M2,5
- 2) Ausbrechoeffnung fuer ruckseitige Leitungseinfuehrung
- 3) Oeffnung fuer Vorflaengeschloss mit Buegeldurchmesser max. 8 mm

last modified:

5/15/2020 