
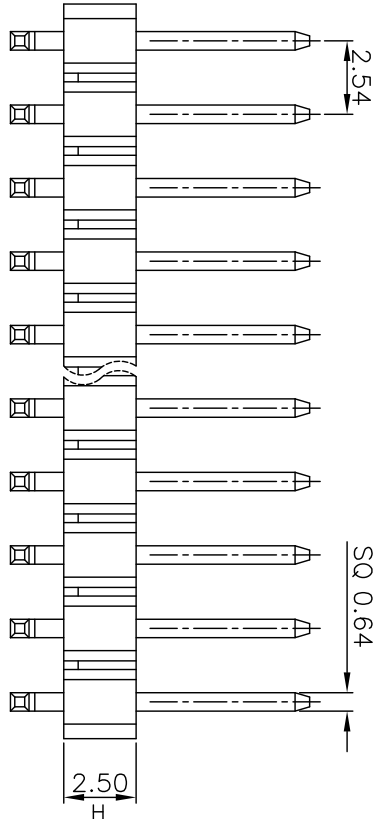
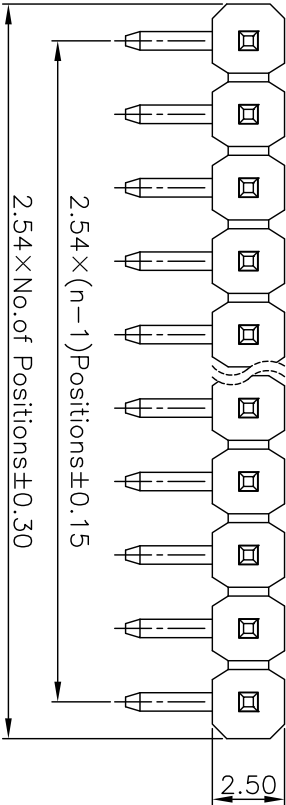
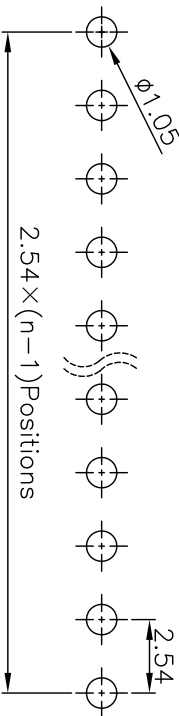


SPECIFICATIONS

Rated Current : 3.0AMP
Contact Resistance : 20mΩ Max
Withstand Voltage : 500V AC/DC
Insulation Resistance : 1000MΩ Min
Operation Temperature : -40°C to +108°C

Contact Material : Brass
Contact Plating : Au or Sn Over Ni
Insulator Material : Polyester(UL94V-0)
Standard : PA6T
Max Processing Temp : 230°C for 5-10 seconds



P.C.B LAYOUT

MODEL: 2.54W-1XnP-H2.5-PAxPCxX	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 单排塑高2.5弯插排针	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ±3°
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X* ±2°
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX* ±1°
	SIZE: A4	DATE:	X.XXX±0.10mm X.XXX ±0.5°
	UNIT : mm	DATE:	

**深圳市吉威电子有限公司**
SZJUSTWELL ELECTRONICS CO., LTD

NO:	PARTICULAR	BY	DATE
REVISIONS			

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1