## CGS | CGS TE TE Internal #: 4-1879445-2 2.7K Ω, Wire Wound, Power Resistor, Height 61 mm [2.402 in], Length 8.898 in [226 mm], Width 28 mm [1.102 in], 2 Termination, Box, 5 %, 120 W, CGS TE

### View on TE.com >

### Passive Components > Resistors > Chassis Mount Resistors



Resistor Type: Power Resistor

Number of Terminations: 2

Packaging Method: Box

Passive Component Tolerance: 5%

Element Type: Wire Wound

## Features



### Product Type Features

Resistor Type	Power Resistor			
Element Type	Wire Wound			
Configuration Features				
Number of Resistors	1			
Electrical Characteristics				
Passive Component Tolerance	5 %			
Resistance Class	$1k\Omega - 1M\Omega$			
Resistance Value	2.7ΚΩ			
Power Rating	120 W			
Termination Features				
Number of Terminations	2			
Chassis Mount Resistor Termination Type	Mounting Terminals			
Mechanical Attachment				

2.7 K  $\Omega,$  Wire Wound, Power Resistor, Height 61 mm [2.402 in], Length 8.898 in [226 mm], Width 28 mm [1.102 in], 2 Termination, Box, 5 %, 120 W, CGS TE



Panel Mount Feature Type	Mounting Brackets			
Dimensions				
Product Height	61 mm[2.402 in]			
Product Length	226 mm[8.898 in]			
Product Width	28 mm[1.102 in]			
Usage Conditions				
Operating Temperature Range	-55 – 155 °C			
Temperature Coefficient	±300 ppm/°C			
Packaging Features				
Packaging Method	Box			
Product Compliance   For compliance documentation, visit the product page on TE.com>   EU RoHS Directive 2011/65/EU Compliant				
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)			

Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

### Halogen Content

Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

**L** For support call+1 800 522 6752

2.7K Ω, Wire Wound, Power Resistor, Height 61 mm [2.402 in], Length 8.898 in [226 mm], Width 28 mm [1.102 in], 2 Termination, Box, 5 %, 120 W, CGS TE





# Also in the Series CGS TE








RJ25 Connectors(4)	RJ45 Connectors(30)

# Customers Also Bought

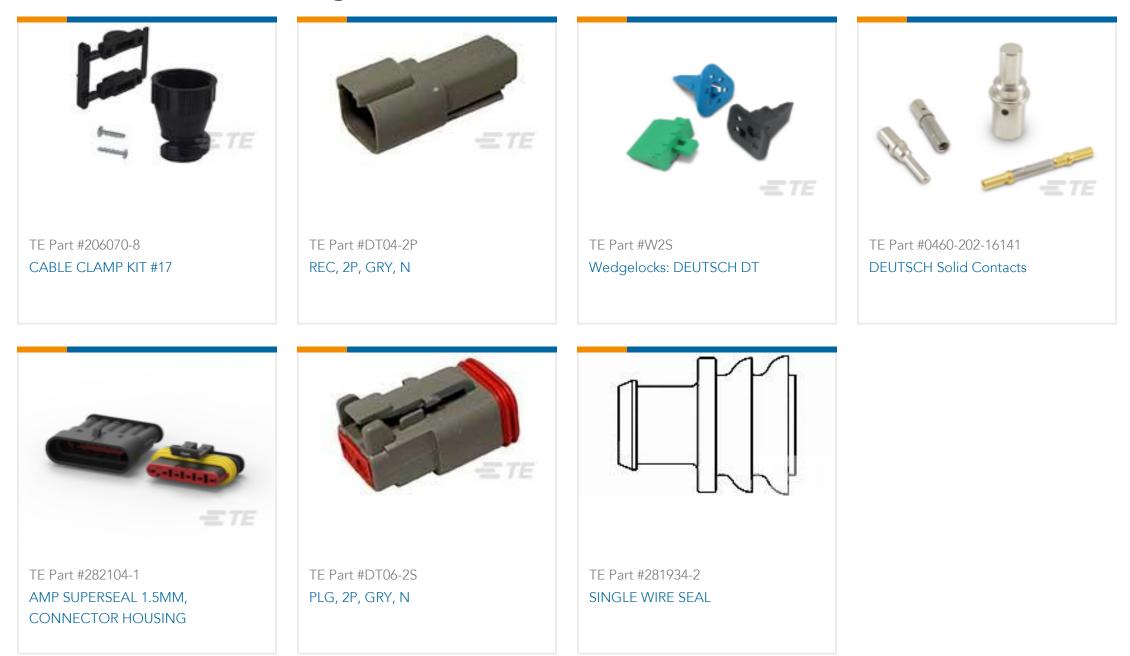

2.7K  $\Omega$ , Wire Wound, Power Resistor, Height 61 mm [2.402 in], Length 8.898 in [226 mm], Width 28 mm [1.102 in], 2 Termination, Box, 5 %, 120 W, CGS TE



## Documents

Product Drawings TE 120W 2K7 5% Bracket

English

Datasheets & Catalog Pages High Power Wire wound Resistor Type TE Series

English