



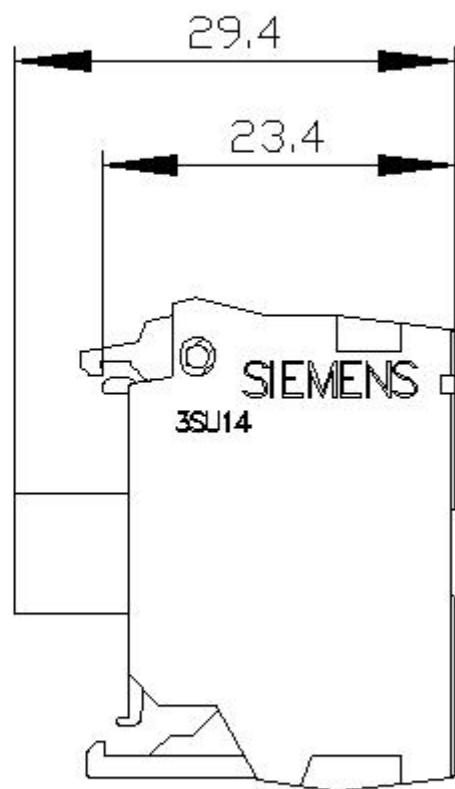


LED module with integrated LED 24 V AC/DC, yellow, screw terminal, for front plate mounting, Z=50-unit packaging

product brand name	SIRIUS ACT
product designation	LED module
product type designation	3SU1
<b>General technical data</b>	
product component	
• diode	Yes
• lamp transformer	No
• light source	Yes
• series resistor	No
insulation voltage rated value	320 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
• for actuation	AC/DC
surge voltage resistance rated value	4 kV
consumed current maximum	25 mA
protection class IP	
• of the enclosure	IP40
• of the terminal	IP20
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
• for railway applications acc. to DIN EN 61373	Category 1, Class B
vibration resistance	
• acc. to IEC 60068-2-6	10 ... 500 Hz: 5g
• for railway applications acc. to DIN EN 61373	Category 1, Class B
operating period typical	100 000 h
reference code acc. to IEC 81346-2	P
operating voltage 1	
• at AC	
— at 50 Hz rated value	24 V
— at 60 Hz rated value	24 V
• at DC rated value	24 V
relative positive tolerance of the operating voltage	20 %
relative negative tolerance of the operating voltage	20 %
<b>Control circuit/ Control</b>	
inrush current maximum	2 A
<b>Connections/ Terminals</b>	
type of electrical connection	screw-type terminals

<b>type of connectable conductor cross-sections</b>	<ul style="list-style-type: none"> <li>• solid with core end processing</li> <li>• solid without core end processing</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> <li>• at AWG cables</li> <li>• tightening torque with screw-type terminals</li> </ul>	2x (0.5 ... 0.75 mm <sup>2</sup> ) 2x (1.0 ... 1.5 mm <sup>2</sup> ) 2x (0.5 ... 1.5 mm <sup>2</sup> ) 2x (1.0 ... 1.5 mm <sup>2</sup> ) 2x (18 ... 14) 0.8 ... 0.9 N·m		
<b>Lamp</b>				
<b>type of light source</b>	LED			
<b>color of the light source</b>	yellow			
<b>light intensity</b>	900 ... 1 400 mcd			
<b>certificate of suitability</b>				
<ul style="list-style-type: none"> <li>• ATEX</li> <li>• IECEx</li> </ul>	No No			
<b>Ambient conditions</b>				
<ul style="list-style-type: none"> <li>• ambient temperature during operation</li> <li>• ambient temperature during storage</li> </ul>	-25 ... +70 °C -40 ... +80 °C			
environmental category during operation acc. to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted)			
<b>Installation/ mounting/ dimensions</b>				
<b>fastening method</b>				
<ul style="list-style-type: none"> <li>• of modules and accessories</li> </ul>	Front plate mounting			
<b>height</b>	33.2 mm			
<b>width</b>	9.8 mm			
<b>depth</b>	29.4 mm			
<b>Certificates/ approvals</b>				
<b>Further information</b>				
Information- and Downloadcenter (Catalogs, Brochures,...)				
<a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>				
Industry Mall (Online ordering system)				
<a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BB30-1AA0-Z X90">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BB30-1AA0-Z X90</a>				
Cax online generator				
<a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1401-1BB30-1AA0-Z X90">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1401-1BB30-1AA0-Z X90</a>				
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)				
<a href="https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BB30-1AA0-Z X90">https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BB30-1AA0-Z X90</a>				
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)				
<a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1BB30-1AA0-Z X90&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1BB30-1AA0-Z X90&amp;lang=en</a>				

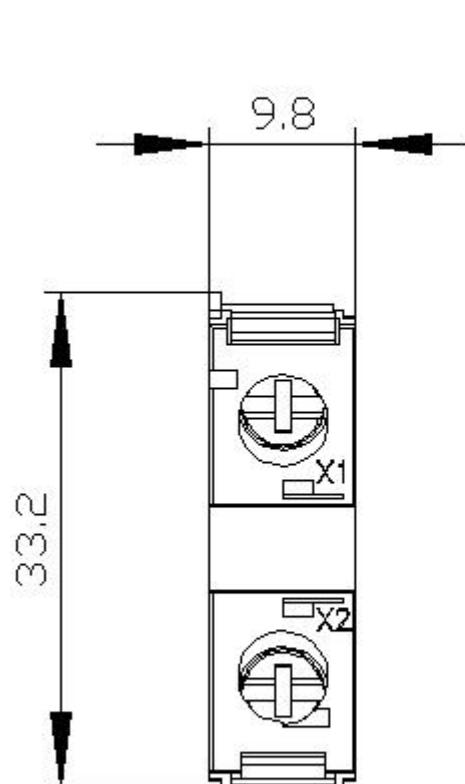

**-P**  
**24 V AC/DC**

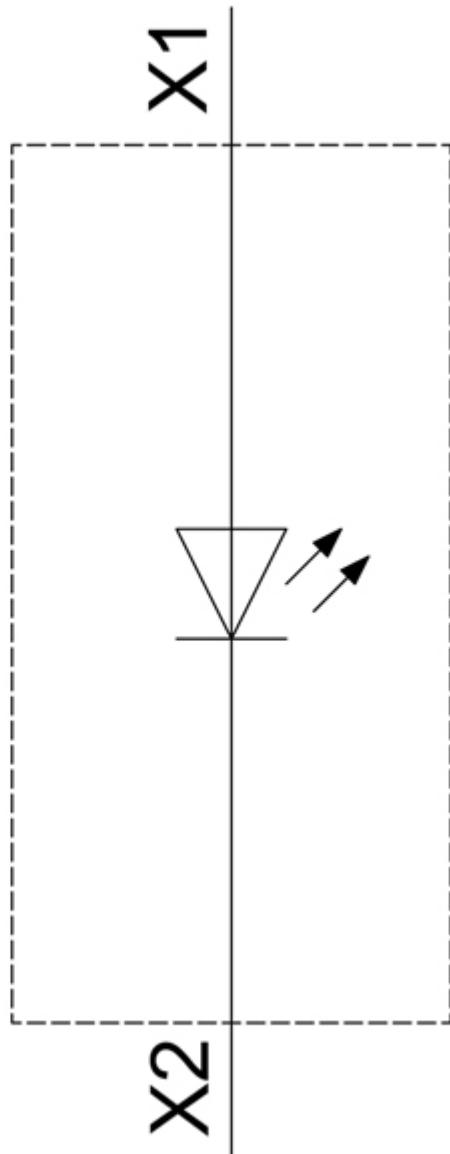

last modified:

12/21/2020