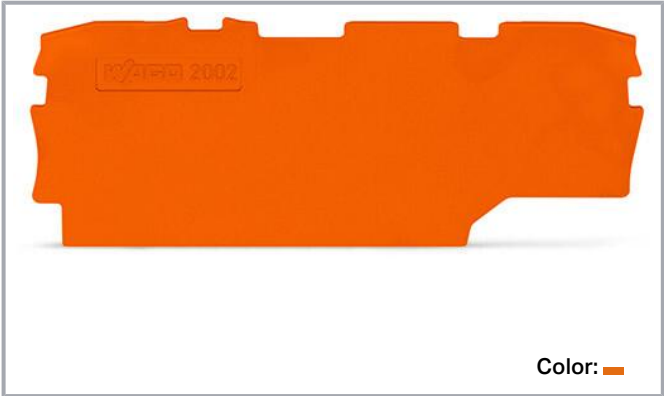




Data
Physical data

Width	1 mm / 0.039 inches
Height	72.9 mm / 2.87 inches
Depth	32.9 mm / 1.295 inches

Mechanical Data

Mounting type	snap-on type
---------------	--------------

Material data

Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.06 MJ
Weight	2 g

Subject to changes. Please also observe the further product documentation!



Commercial data

Product Group	22 (TOPJOB S)
eCl@ss 10.0	27-14-11-33
eCl@ss 9.0	27-14-11-33
ETIM 8.0	EC000886
ETIM 7.0	EC000886
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4050821089018
Customs tariff number	85389099990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	ATEX-Attestation of Conformity WAGO GmbH & Co. KG	-	-
	Railway WAGO GmbH & Co. KG	-	Railway Ready

Approvals for hazardous areas

Logo	Approval	Additional Approval Text	Certificate name
	ATEX KIWA Netherlands B.V.	EN 60079	KIWA 17ATEX0030 U
	CCC CNEX	GB/T 3836.3	2020312313000180 (Ex ec IIC Gc)
	IECEX KIWA Netherlands B.V.	EN 60079	IECEX KIWA 17.0014 U (Ex ec IIC Gc)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Required accessories

End plate

Through terminal block


Item no.: 2002-1901

2-conductor through terminal block; 2.5 mm²; with test option; with additional jumper position; same profile as 2-conductor disconnect terminal block; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1901


Item no.: 2002-1902


2-conductor through terminal block; 2.5 mm²; with test option; with additional jumper position; same profile as 2-conductor disconnect terminal block; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; orange

www.wago.com/2002-1902


Item no.: 2002-1904


2-conductor through terminal block; 2.5 mm²; with test option; with additional jumper position; same profile as 2-conductor disconnect terminal block; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; blue

www.wago.com/2002-1904


Item no.: 2202-1901

2-conductor through terminal block; with push-button; 2.5 mm²; with test option; with additional jumper position; same profile as 2-conductor disconnect terminal block; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1901


Item no.: 2202-1902

2-conductor through terminal block; with push-button; 2.5 mm²; with test option; with additional jumper position; same profile as 2-conductor disconnect terminal block; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; orange

www.wago.com/2202-1902


Item no.: 2202-1904

2-conductor through terminal block; with push-button; 2.5 mm²; with test option; with additional jumper position; same profile as 2-conductor disconnect terminal block; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; blue

www.wago.com/2202-1904

Disconnect terminal block for test and measurement


Item no.: 2002-1972/401-000

2-conductor disconnect/test terminal block; with mechanical interlock; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; orange

www.wago.com/2002-1972/401-000


Item no.: 2002-1971/401-000

2-conductor disconnect/test terminal block; with mechanical interlock; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1971/401-000


Item no.: 2002-1974/401-000

2-conductor disconnect/test terminal block; with mechanical interlock; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; blue

www.wago.com/2002-1974/401-000

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Disconnect terminal block

**Item no.: 2002-1971**

2-conductor disconnect/test terminal block; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1971

**Item no.: 2202-1971**


2-conductor disconnect/test terminal block; with push-button; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1971

**Item no.: 2202-1972**

2-conductor disconnect/test terminal block; with push-button; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; orange

www.wago.com/2202-1972

**Item no.: 2202-1974**

2-conductor disconnect/test terminal block; with push-button; with additional jumper position; orange disconnect link; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; blue

www.wago.com/2202-1974

Carrier terminal block for modules and plugs

**Item no.: 2002-1961**

2-conductor carrier terminal block; with additional jumper position; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1961

**Item no.: 2202-1961**

2-conductor carrier terminal block; with push-button; with additional jumper position; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1961

Ground terminal block

**Item no.: 2002-1907**

2-conductor ground terminal block; 2.5 mm²; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; green-yellow

www.wago.com/2002-1907

**Item no.: 2202-1907**

2-conductor ground terminal block; with push-button; 2.5 mm²; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; green-yellow


www.wago.com/2202-1907

Fuse terminal block

**Item no.: 2002-1981**


2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with additional jumper position; without blown fuse indication; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1981

**Item no.: 2002-1981/1000-413**


2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with blown fuse indication by LED; 24 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1981/1000-413

**Item no.: 2002-1981/1000-434**

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with blown fuse indication by LED; 24 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1981/1000-434

**Item no.: 2002-1981/1000-414**

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with blown fuse indication by LED; 48 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1981/1000-414

Item no.: 2002-1981/1000-429

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with blown fuse indication by LED; 12 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray


www.wago.com/2002-1981/1000-429



Item no.: 2002-1981/1000-435

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with blown fuse indication by LED; 48 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1981/1000-435



Item no.: 2002-1981/1000-449

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with blown fuse indication by LED; 12 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2002-1981/1000-449



Item no.: 2202-1981/1000-429

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with push-button; with blown fuse indication by LED; 12 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray


www.wago.com/2202-1981/1000-429



Item no.: 2202-1981/1000-434

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with push-button; with blown fuse indication by LED; 24 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray


www.wago.com/2202-1981/1000-434



Item no.: 2202-1981/1000-435

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with push-button; with blown fuse indication by LED; 48 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray


www.wago.com/2202-1981/1000-435



Item no.: 2202-1981/1000-449

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with push-button; with blown fuse indication by LED; 12 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1981/1000-449



Item no.: 2202-1981

2-conductor fuse terminal block; for mini-automotive blade-style fuses; per DIN 7258-3f, ISO 8820-3; with test option; with additional jumper position; without blown fuse indication; with push-button; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1981



Item no.: 2202-1981/1000-413

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with push-button; with blown fuse indication by LED; 24 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1981/1000-413



Item no.: 2202-1981/1000-414

2-conductor fuse terminal block; for mini-automotive blade-style fuses; with test option; with push-button; with blown fuse indication by LED; 48 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/2202-1981/1000-414

Optional accessories

End plate

Switching module



Item no.: 2042-1008

Switching module; with changeover rocker switch; Switching voltage: 250 VAC; translucent

www.wago.com/2042-1008

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 2042-1108**

Switching module; with momentary switch; Switching voltage: 250 VAC; translucent

www.wago.com/2042-1108

Solid-state relay module

**Item no.: 2042-7304**

Solid-state relay module; Nominal input voltage: 24 VDC; Limiting continuous current: 0.5 A; Railway; Frequency: 100 kHz; Module width: 15 mm

www.wago.com/2042-7304**Item no.: 2042-7504**

Solid-state relay module; Nominal input voltage: 24 VDC; Output voltage range: 0 ... 48 VDC; Limiting continuous current: 4 A; 2-wire connection; Railway; Green status indicator; Module width: 10 mm

www.wago.com/2042-7504**Item no.: 2042-7204**

Solid-state relay module; Nominal input voltage: 24 VDC; Output voltage range: 3 ... 60 VDC; Limiting continuous current: 0.1 A; 2-wire connection; Railway; Frequency: 10 kHz; Green status indicator; Module width: 10 mm

www.wago.com/2042-7204**Item no.: 2042-7604**

Solid-state relay module; Nominal input voltage: 24 VDC; Output voltage range: 16.8 ... 30 VDC; Limiting continuous current: 5 A; 3-wire connection/high-side switching; Railway; Frequency: 5 kHz; Green status indicator; Module width: 15 mm

www.wago.com/2042-7604

Relay module

**Item no.: 2042-3074**

Relay module; Nominal input voltage: 24 VDC; 3 break contacts and 1 make contact; Limiting continuous current: 5 A; Railway; Green status indicator; Module width: 25 mm

www.wago.com/2042-3074**Item no.: 2042-3014**

Relay module; Nominal input voltage: 24 VDC; 2 make contact; Limiting continuous current: 8 A; Railway; Green status indicator; Module width: 20 mm

www.wago.com/2042-3014**Item no.: 2042-3034**

Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; Limiting continuous current: 10 A; Railway; Green status indicator; Module width: 15 mm

www.wago.com/2042-3034**Item no.: 2042-3044**

Relay module; Nominal input voltage: 24 VDC; 2 changeover contacts; Limiting continuous current: 8 A; Railway; Green status indicator; Module width: 20 mm

www.wago.com/2042-3044**Item no.: 2042-3024**

Relay module; Nominal input voltage: 24 VDC; 4 make contacts; Limiting continuous current: 5 A; Railway; Green status indicator; Module width: 25 mm

www.wago.com/2042-3024**Item no.: 2042-3064**

Relay module; Nominal input voltage: 24 VDC; 1 break and 1 make contact; Limiting continuous current: 8 A; Railway; Green status indicator; Module width: 20 mm

www.wago.com/2042-3064**Item no.: 2042-3084**

Relay module; Nominal input voltage: 24 VDC; 2 break and 2 make contacts; Limiting continuous current: 5 A; Railway; Green status indicator; Module width: 25 mm

www.wago.com/2042-3084**Item no.: 2042-3819**

Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 2 make contact; Limiting continuous current: 5 A; Green status indicator; Module width: 20 mm

www.wago.com/2042-3819

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

	Item no.: 2042-3829 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 4 make contacts; Limiting continuous current: 3 A; Green status indicator; Module width: 25 mm	www.wago.com/2042-3829
	Item no.: 2042-3869 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 1 break and 1 make contact; Limiting continuous current: 5 A; Green status indicator; Module width: 20 mm	www.wago.com/2042-3869
	Item no.: 2042-3889 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 2 break and 2 make contacts; Limiting continuous current: 3 A; Green status indicator; Module width: 25 mm	www.wago.com/2042-3889
	Item no.: 2042-3849 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 2 changeover contacts; Limiting continuous current: 5 A; Green status indicator; Module width: 20 mm	www.wago.com/2042-3849
	Item no.: 2042-3879 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 3 break contacts and 1 make contact; Limiting continuous current: 3 A; Green status indicator; Module width: 25 mm	www.wago.com/2042-3879
	Item no.: 2042-3839 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 1 changeover contact; Limiting continuous current: 4 A; Green status indicator; Module width: 15 mm	www.wago.com/2042-3839
	Item no.: 2042-3054 Relay module; Nominal input voltage: 24 VDC; 1 break contact; Limiting continuous current: 6 A; Railway; Green status indicator; Module width: 10 mm	www.wago.com/2042-3054
	Item no.: 2042-3004 Relay module; Nominal input voltage: 24 VDC; 1 make contact; Limiting continuous current: 6 A; Railway; Green status indicator; Module width: 10 mm	www.wago.com/2042-3004
	Item no.: 2042-3809 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 1 make contact; Limiting continuous current: 3 A; Green status indicator; Module width: 10 mm	www.wago.com/2042-3809
	Item no.: 2042-3859 Relay module; Nominal input voltage: 24 ... 230 V AC/DC; 1 break contact; Limiting continuous current: 6 A; Green status indicator; Module width: 10 mm	www.wago.com/2042-3859

Downloads

Documentation

Bid Text

2002-1992 X81 - Datei	2019 Feb 19	xml 2.6 kB	Download
2002-1992 doc - Datei	2017 Apr 27	doc 24.1 kB	Download

Additional Information

pdf Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



2.3 MB

CAD/CAE-Data

CAE data

EPLAN Data Portal 2002-1992	URL	Download
ZUKEN Portal 2002-1992	URL	Download
WSCAD Universe 2002-1992	URL	Download

CAD data

2D/3D Models 2002-1992	URL	Download
------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 2002-1992	URL	Download
--------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2002-1992	URL	Download
End and intermediate plate; 1 mm thick; orange		

Installation Notes

Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!