


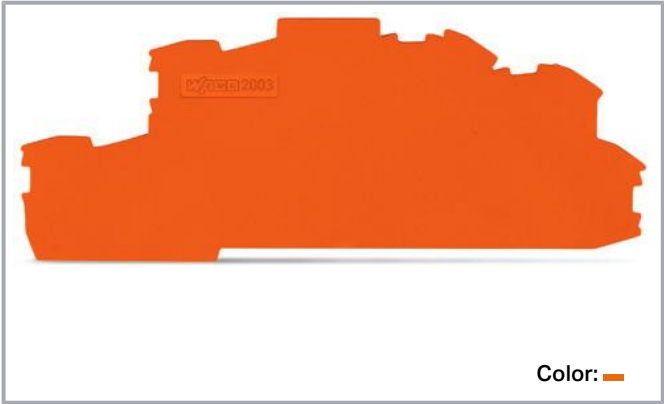

Data

Physical data

Width	1 mm / 0.039 inches
Height	110 mm / 4.331 inches
Depth	44.3 mm / 1.744 inches

Mechanical Data

Mounting type	snap-on type
---------------	--------------

Material data

Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.124 MJ
Weight	4.2 g

Subject to changes. Please also observe the further product documentation!

Commercial data

Product Group	22 (TOPJOB S)
eCl@ss 10.0	27-14-11-33
eCl@ss 9.0	27-14-11-33
ETIM 8.0	EC000886
ETIM 7.0	EC000886
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4050821793489
Customs tariff number	8538909990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Optional accessories

End plate

Multilevel installation terminal block	
	Item no.: 2003-6660 Multilevel installation terminal block; with operating slots; 2.5 mm ² ; Carrier terminal block without knife; P1/P2/PE; brown upper-deck; black middle-deck; green-yellow lower deck; Push-in CAGE CLAMP®; 2,50 mm ² ; gray www.wago.com/2003-6660
	Item no.: 2003-6640 Multilevel installation terminal block; with operating slots; 2.5 mm ² ; Carrier terminal block without knife; N/L/PE; Push-in CAGE CLAMP®; 2,50 mm ² ; gray www.wago.com/2003-6640
	Item no.: 2003-6643 Multilevel installation terminal block; with operating slots; 2.5 mm ² ; Carrier terminal block without knife; P2/P1/PE; black upper deck; brown middle deck; green-yellow lower deck; Push-in CAGE CLAMP®; 2,50 mm ² ; gray www.wago.com/2003-6643
	Item no.: 2003-6661 Multilevel installation terminal block; with operating slots; 2.5 mm ² ; Carrier terminal block without knife; L/N/PE; Push-in CAGE CLAMP®; 2,50 mm ² ; gray www.wago.com/2003-6661
	Item no.: 2003-6662 Multilevel installation terminal block; with operating slots; 2.5 mm ² ; Carrier terminal block without knife; L/L/PE; green-yellow lower deck; Push-in CAGE CLAMP®; 2,50 mm ² ; gray www.wago.com/2003-6662

Downloads

Documentation

Bid Text

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



2003-6693 X81 - Datei	2019 Feb 19	xml 2.7 kB	Download
2003-6693 doc - Datei	2017 Apr 28	doc 24.1 kB	Download
Additional Information		pdf 2.3 MB	Download

CAD/CAE-Data

CAE data

WSCAD Universe 2003-6693	URL	Download
ZUKEN Portal 2003-6693	URL	Download
EPLAN Data Portal 2003-6693	URL	Download

CAD data

2D/3D Models 2003-6693	URL	Download
------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 2003-6693	URL	Download
--------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2003-6693 End and intermediate plate; 1 mm thick; only for use with fuse plugs; orange	URL	Download
--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.