


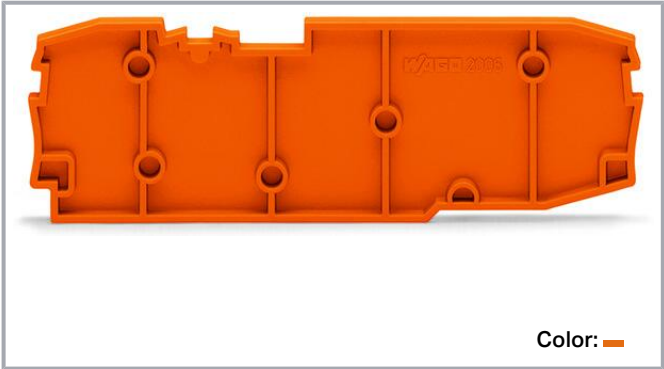

Data
Physical data

Width	2.9 mm / 0.114 inches
Height	96.3 mm / 3.791 inches
Depth	32.9 mm / 1.295 inches

Mechanical Data

Mounting type	snap-on type
---------------	--------------

Material data

Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.127 MJ
Weight	4.2 g

Commercial data

Product Group	22 (TOPJOB S)
---------------	---------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



eCl@ss 10.0	27-14-11-33
eCl@ss 9.0	27-14-11-33
ETIM 8.0	EC000886
ETIM 7.0	EC000886
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4066966275391
Customs tariff number	8538909990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	Railway WAGO GmbH & Co. KG	-	Railway Ready

Optional accessories

End plate

Fuse plug	
	Item no.: 2006-931/099-000 Fuse plug; with pull-tab; for glass cartridge fuse 1/4" x 1 1/4"; without blown fuse indication; 10.4 mm wide; gray www.wago.com/2006-931/099-000
	Item no.: 2006-931/1099-542 Fuse plug; with pull-tab; for glass cartridge fuse 1/4" x 1 1/4"; with indicator lamp; 30 - 65 V; 10.4 mm wide; gray www.wago.com/2006-931/1099-542
	Item no.: 2006-931/1099-541 Fuse plug; with pull-tab; for glass cartridge fuse 1/4" x 1 1/4"; with indicator lamp; 12 - 30 V; 10.4 mm wide; gray www.wago.com/2006-931/1099-541
	Item no.: 2006-931/1099-859 Fuse plug; with pull-tab; for glass cartridge fuse 1/4" x 1 1/4"; with indicator lamp; 380 - 500 V; 10.4 mm wide; gray www.wago.com/2006-931/1099-859
	Item no.: 2006-931/1099-836

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Fuse plug; with pull-tab; for glass cartridge fuse 1/4" x 1 1/4"; with indicator lamp; 230 V; 10.4 mm wide; gray

www.wago.com/2006-931/1099-836

Downloads

Documentation

Bid Text

2006-1696	2019 Feb 19	xml	Download
X81 - Datei		2.5 kB	

2006-1696	2017 Apr 28	doc	Download
doc - Datei		24.1 kB	

Additional Information

pdf	Download
2.3 MB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 2006-1696	URL	Download
-----------------------------	-----	----------

WSCAD Universe 2006-1696	URL	Download
--------------------------	-----	----------

ZUKEN Portal 2006-1696	URL	Download
------------------------	-----	----------

CAD data

2D/3D Models 2006-1696	URL	Download
------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 2006-1696	URL	Download
--------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2006-1696	URL	Download
Intermediate plate; 2.9 mm wide; orange		

Subject to changes. Please also observe the further product documentation!



Installation Notes

Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.