


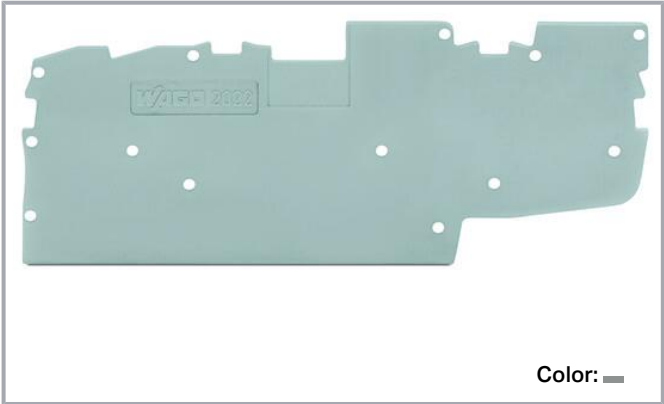

Data
Physical data

Width	1 mm / 0.039 inches
Height	85.8 mm / 3.378 inches
Depth	31.6 mm / 1.244 inches

Mechanical Data

Mounting type	snap-on type
---------------	--------------

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.096 MJ
Weight	2.7 g

Subject to changes. Please also observe the further product documentation!

Commercial data

Product Group	18 (X-COM-System)
eCl@ss 10.0	27-14-11-33
eCl@ss 9.0	27-14-11-33
ETIM 8.0	EC000886
ETIM 7.0	EC000886
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454913809
Customs tariff number	85389099990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Required accessories

End plate

Through terminal block		
	Item no.: 2022-1401/999-953 2-conductor/2-pin carrier terminal block; 2.5 mm ² ; suitable for Ex nA applications; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm ² ; gray	www.wago.com/2022-1401/999-953
	Item no.: 2022-1404 2-conductor/2-pin carrier terminal block; 2.5 mm ² ; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm ² ; blue	www.wago.com/2022-1404
	Item no.: 2022-1404/999-953 2-conductor/2-pin carrier terminal block; 2.5 mm ² ; suitable for Ex nA applications; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm ² ; blue	www.wago.com/2022-1404/999-953
	Item no.: 2022-1402 2-conductor/2-pin carrier terminal block; 2.5 mm ² ; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm ² ; orange	www.wago.com/2022-1402
	Item no.: 2022-1401 2-conductor/2-pin carrier terminal block; 2.5 mm ² ; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm ² ; gray	www.wago.com/2022-1401
Ground terminal block		
	Item no.: 2022-1407 2-conductor/2-pin ground carrier terminal block; 2.5 mm ² ; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm ² ; green-yellow	www.wago.com/2022-1407
	Item no.: 2022-1407/999-953	

Subject to changes. Please also observe the further product documentation!



2-conductor/2-pin ground carrier terminal block; 2.5 mm²; suitable for Ex nA applications; for DIN-rail
35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; green-yellow

www.wago.com/2022-1407/999-953

Downloads

Documentation

Bid Text

2022-1491 X81 - Datei	2019 Feb 19	xml 2.6 kB	Download
--------------------------	-------------	---------------	----------

2022-1491 doc - Datei	2017 Apr 28	doc 22.5 kB	Download
--------------------------	-------------	----------------	----------

Additional Information

pdf
2.3 MB

Download

CAD/CAE-Data

CAD data

2D/3D Models 2022-1491	URL	Download
------------------------	-----	----------

CAE data

EPLAN Data Portal 2022-1491	URL	Download
-----------------------------	-----	----------

WSCAD Universe 2022-1491	URL	Download
--------------------------	-----	----------

ZUKEN Portal 2022-1491	URL	Download
------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 2022-1491	URL	Download
--------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2022-1491 End and intermediate plate; 1 mm thick; gray	URL	Download
--	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Installation Notes

Product family

X-COM S

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.