
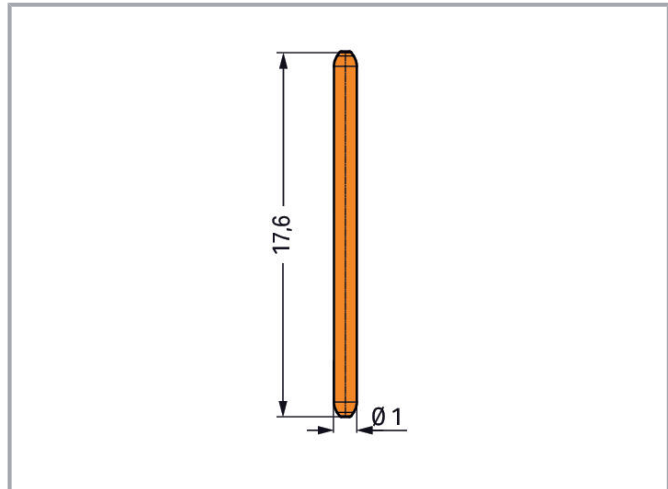


Data sheet | Item number: 2065-133

Board-to-Board Link; Pin spacing 6.5 mm; Length: 17.6 mm; silver-colored

www.wago.com/2065-133

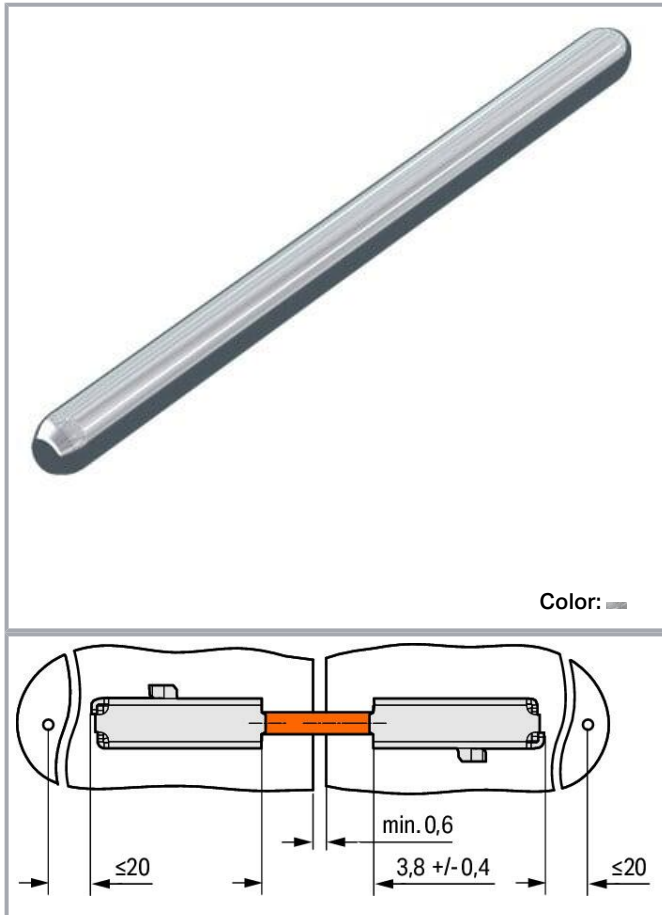

Item description

- Board-to-board links simplify in-line assembly of LED modules
- Space saving connection of PCBs

Data

Notes

Safety information

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Notice:**

Terminal block without insulation housing! Protection against accidental contact must be provided at voltages higher than low voltages (e.g., SELV/PELV) for the relevant application.

Note	The layout must meet the requirements of the insulation coordination standard EN/IEC 60664-1 and applicable end product standards. When using board-to-board links, please note the potentially reduced clearances (e.g., with metal core boards).
------	--

Electrical data**Ratings per IEC/EN**

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated voltage (III/2)	320 V
Rated impulse voltage (III/2)	4 kV
Nominal voltage (II/2)	630 V
Rated surge voltage (II/2)	4 kV
Rated current	9 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Physical data

Depth	17.6 mm / 0.693 inches
Length	17.6 mm
Diameter	1 mm

Mechanical Data

Mating cycles (max.)	10
Number of mating cycles	10 connections/disconnections (max.)
Suitable	for SMD PCB terminal blocks; 2065 Series

Material data

Note (material data)	Information on material specifications can be found here
----------------------	--

Subject to changes. Please also observe the further product documentation!



Color	silver-colored
Contact material	Copper alloy
Contact plating	Silver
Weight	0.1 g

Environmental requirements

Limit temperature range	-60 ... +120 °C
-------------------------	-----------------

Commercial data

ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	1500 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143862738
Customs tariff number	85369010000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Counterpart

	Item no.2065-100/998-403 SMD PCB terminal block; push-button; 0.75 mm²; Pin spacing 6.5 mm; 1-pole; Push-in CAGE CLAMP®; in tape-and-reel packaging; Without housing; 0,75 mm²; silver-colored	www.wago.com/2065-100/998-403
	Item no.2065-101/998-403 SMD PCB terminal block; 0.75 mm²; Pin spacing 6 mm; 1-pole; PUSH WIRE®; in tape-and-reel packaging; Without housing; 0,75 mm²; silver-colored	www.wago.com/2065-101/998-403

Downloads

Documentation

Additional Information

	2019 Apr 3	pdf 2.1 MB	Download
--	------------	---------------	----------

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAD data

2D/3D Models 2065-133	URL	Download
-----------------------	-----	----------

CAE data

ZUKEN Portal 2065-133	URL	Download
-----------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 2065-133	URL	Download
-------------------------------------	-----	----------


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2065-133	URL	Download
Board-to-Board Link; Pin spacing 6.5 mm; Length: 17.6 mm; silver-colored		

Installation Notes


Installation

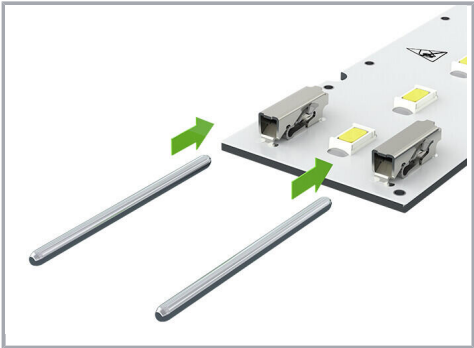

Insert the board-to-board links into the terminal blocks.


Installation

Subject to changes. Please also observe the further product documentation!

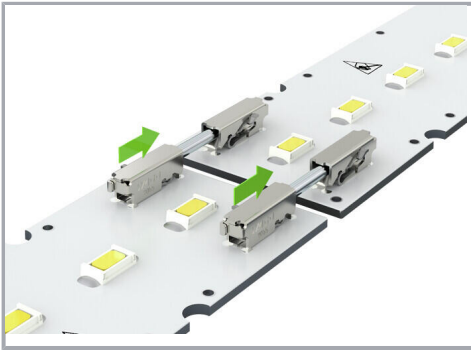

Assembly: Place PCBs on a flat surface and insert links into terminal blocks on adjoining PCBs. Disassembly: Open the terminal blocks with an operating tool. (max. 5 connections /disconnections)

Installation

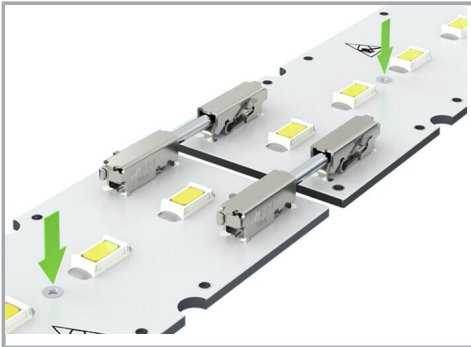

The PCBs must be secured.

Subject to changes. Please also observe the further product documentation!