



Picture differs from the item.

Color: —

Data

Mechanical Data

Suitable

for male and female connectors with CAGE CLAMP® connection

Material data

Note (material data)

Information on material specifications can be found here

Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.001 MJ
Weight	0 g

Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastra. 27
32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

ETIM 7.0	EC002848
PU (SPU)	500 (100) pcs
Packaging type	box
Country of origin	DE
GTIN	4017332121156
Customs tariff number	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Documentation

Additional Information

	2019 Apr 3	pdf 2.1 MB	Download
--	------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 231-669	URL	Download
----------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

CAE data

ZUKEN Portal 231-669

URL

Download

Asset Administration Shell

Asset Administration Shell 231-669

URL

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 231-669


URL

Download

Lockout caps; for covering unused clamping units; orange

Installation Notes

Installation

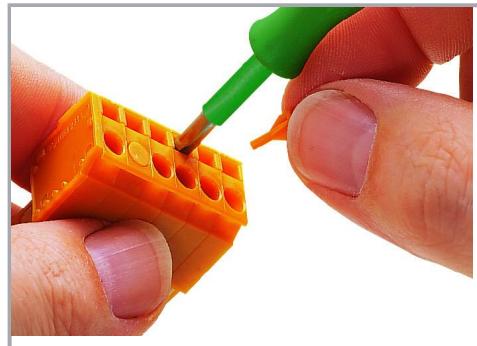

Covering unused clamping units in CAGE CLAMP®-equipped male and female connectors (e.g., when doubling the pin spacing to meet clearance and creepage distance requirements, or when a higher rated voltage is required). Lockout pins are not suitable for panel-mount, angled female connectors.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27
32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.