


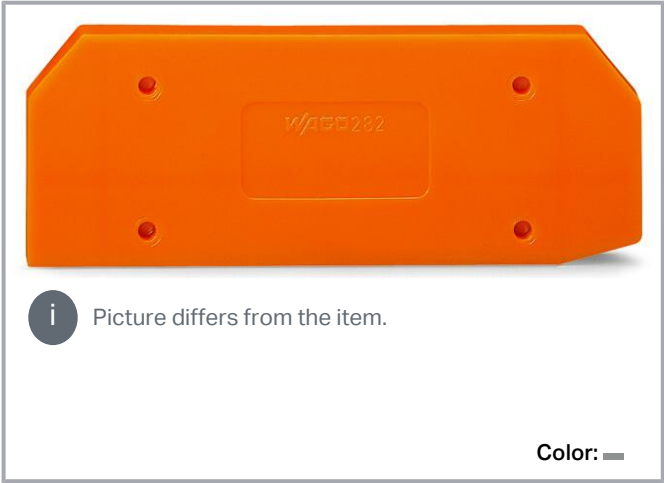

Data
Physical data

Width	4 mm / 0.157 inches
Height	85 mm / 3.346 inches
Depth	37 mm / 1.457 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.221 MJ
Weight	7.3 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-33
eCl@ss 9.0	27-14-11-33
ETIM 8.0	EC000886
ETIM 7.0	EC000886
PU (SPU)	50 (25) pcs
Packaging type	box
Country of origin	CN
GTIN	4017332286121
Customs tariff number	8538909990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Required accessories

End plate

Through terminal block		
	Item no.: 282-133 2-conductor through terminal block; 6 mm ² ; with test option; for 4 mm Ø test plugs; same profile as 2-conductor disconnect terminal block; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-133
Disconnect terminal block for test and measurement		
	Item no.: 282-131 2-conductor disconnect/test terminal block; with test option; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm ² ; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-131
Disconnect terminal block		
	Item no.: 282-139 Ground conductor disconnect terminal block; 230 V; 6 mm ² ; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-139
	Item no.: 282-140 Ground conductor disconnect terminal block; 24 V; 6 mm ² ; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-140
	Item no.: 282-141 Ground conductor disconnect terminal block; 48 V; 6 mm ² ; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-141
	Item no.: 282-138 Ground conductor disconnect terminal block; 120 V; 6 mm ² ; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-138
	Item no.: 282-135 2-conductor disconnect/test terminal block; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm ² ; CAGE CLAMP®; 6,00 mm ² ; gray	www.wago.com/282-135

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Downloads

Documentation

Bid Text

282-314 X81 - Datei	2019 Feb 19	xml 2.6 kB	Download
------------------------	-------------	---------------	----------

282-314 doc - Datei	2017 Jun 12	doc 22.5 kB	Download
------------------------	-------------	----------------	----------

Additional Information

pdf 2.3 MB	Download
---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 282-314	URL	Download
----------------------	-----	----------

CAE data

EPLAN Data Portal 282-314	URL	Download
---------------------------	-----	----------

WSCAD Universe 282-314	URL	Download
------------------------	-----	----------

ZUKEN Portal 282-314	URL	Download
----------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 282-314	URL	Download
------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 282-314 End and intermediate plate; 4 mm thick; gray	URL	Download
--	-----	----------

Subject to changes. Please also observe the further product documentation!



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.