



Data sheet | Item number: 704-8013

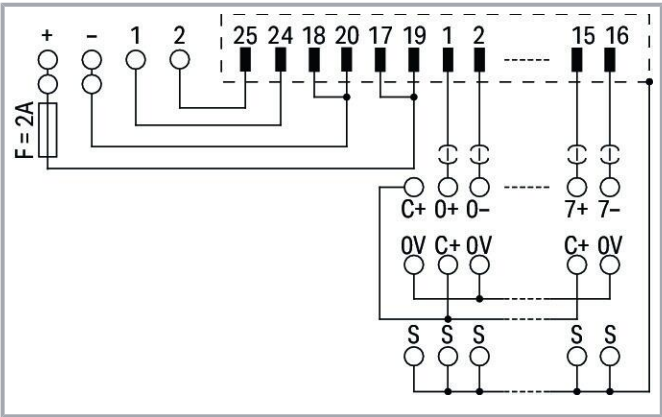

Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier

www.wago.com/704-8013

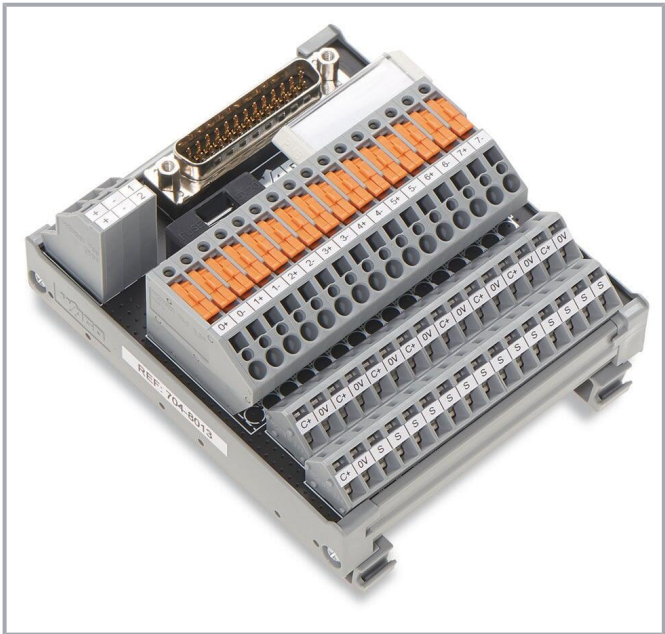

Data
Electrical data

Inputs/outputs	8-channel analog input or output
Circuit type	2-wire connection 4-wire connection
Operating voltage	≤48 VDC
Limiting continuous current	1 A
Internal fuse	Supply: 2 A
Specialty functions	With disconnect/test terminal blocks with disconnect/test terminal blocks

Safety and protection

Rated voltage	50 V
Rated surge voltage	0.8 kV
Pollution degree	2

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Compatibility

Siemens

Siemens S7-300	6ES7 331-1KF02-0AB0
	6ES7 331-7HF01-0AB0
	6ES7 331-7KF02-0AB0
	6ES7 331-7NF00-0AB0
	6ES7 331-7NF10-0AB0
	6ES7 331-7PF01-0AB0
	6ES7 331-7SF00-0AB0
	6ES7 331-7TF00-0AB0
	6ES7 332-5HF00-0AB0
	6ES7 332-8TF01-0AB0
	6ES7 334-0CE01-0AA0
	6ES7 336-4GE01-0AB0
Siemens S7-400	6ES7 431-1KF00-0AB0
	6ES7 431-1KF10-0AB0
	6ES7 431-1KF20-0AB0
	6ES7 431-7KF00-0AB0
	6ES7 432-1HF00-0AB0
Siemens S7-1500	6ES7 531-7KF00-0AB0
	6ES7 531-7MH00-0AB0
	6ES7 531-7NF00-0AB0
	6ES7 531-7NF10-0AB0
	6ES7 531-7PF00-0AB0
	6ES7 531-7QF00-0AB0
	6ES7 532-5HF00-0AB0
	6ES7 534-7QE00-0AB0

GE Fanuc

GE Fanuc 9030	IC693 ALG222
	IC693 ALG223
	IC693 ALG392
GE Fanuc RX3i	IC694 ALG223
	IC694 ALG392

Schneider

Schneider Modicon TM3	TM3 AI8(G)
	TM3 AM6(G)
	TM3 TI8T(G)
Schneider Modicon M340	BMX ART 0414
	BMX ART 0814
	BMX AMI 0800

Subject to changes. Please also observe the further product documentation!



	BMX AMI 0810 BMX AMM 0600 BMX AMO 0802
Schneider Modicon Quantum	140 ACI 030 00 140 ACI 040 00 140 ACO 130 00 140 ARI 030 10 140 AVI 030 00
Schneider TSX	TSX AEY 414 TSX AEZ 801 TSX AEZ 802

Rockwell

Rockwell Compact Logix	1769 - IF16C 1769 - IF4XOF2 (F) 1769 - IR6 1769 - OF8C 1769 - OF8V
Rockwell Control Logix	1756 - IF6CIS 1756 - IF6I 1756 - IF8 1756 - IF8H 1756 - IF16 1756 - IR6I 1756 - OF6CI 1756 - OF6VI 1756 - OF8 1756 - OF8H

WAGO

WAGO I/O System 753	753-453 (x2) 753-455 (x2) 753-457 (x2) 753-459 (x2) 753-553 (x2) 753-555 (x2) 753-557 (x2) 753-559 (x2)
---------------------	--

Connection data

Connection 1

Connector	D-subminiature male connector
-----------	-------------------------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Pole number 1	25
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

Connection 2

Design 2	PCB terminal blocks
Pole number 2	16
Connection type 2	Field
WAGO connector 2	WAGO 742 Series
Solid conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3

Design 3	PCB terminal blocks (double-row)
Pole number 3	32
Connection type 3	Field
WAGO connector 3	WAGO 236 Series
Solid conductor 3	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 3	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 3	5 ... 6 mm / 0.2 ... 0.24 inches

Connection 4

Design 4	PCB terminal blocks (double-deck)
Pole number 4	6
Connection type 4	Power supply
Connection technology 4	CAGE CLAMP®
WAGO connector 4	WAGO 736 Series
Solid conductor 4	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 4	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 4	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	92 mm / 3.62 inches
Height	105 mm / 4.134 inches

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Depth from upper-edge of DIN-rail	50 mm / 1.969 inches
-----------------------------------	----------------------

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	2.496 MJ
Weight	190 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	85% (non-condensing)

Commercial data

Product Group	30 (WAGO France)
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 8.0	EC002780
ETIM 7.0	EC002780
PU (SPU)	1 pcs
Packaging type	box
Country of origin	FR
GTIN	4050821115564
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Optional accessories

Cables and pluggable connectors

System cable



Item no.: 706-2300/400-200

System cable; for Siemens S7-300; 8 analog inputs; Length: 2 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300

/400-200

Subject to changes. Please also observe the further product documentation!

**Item no.: 706-2300/502-100**

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/502-100**Item no.: 706-2300/502-200**

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 2 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/502-200**Item no.: 706-2300/406-100**

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring; Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/406-100**Item no.: 706-2300/406-200**

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring; Length: 2 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/406-200**Item no.: 706-2300/406-300**

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring; Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/406-300**Item no.: 706-2300/404-100**

System cable; for Siemens S7-300; 8 analog inputs (current), var. 1; Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/404-100**Item no.: 706-2300/404-200**

System cable; for Siemens S7-300; 8 analog inputs (current), var. 1; Length: 2 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/404-200**Item no.: 706-2300/400-300**

System cable; for Siemens S7-300; 8 analog inputs; Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/400-300**Item no.: 706-2300/400-100**

System cable; for Siemens S7-300; 8 analog inputs; Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/400-100**Item no.: 706-2300/502-300**

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/502-300**Item no.: 706-2300/404-300**

System cable; for Siemens S7-300; 8 analog inputs (current), var. 1; Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/404-300**Marking accessories**

Marking strip

**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

www.wago.com/2009-110

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 709-196**

Marking strips; for laser printer; translucent

www.wago.com/709-196**Item no.: 709-178**

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

www.wago.com/709-178**Item no.: 709-177**

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent

www.wago.com/709-177

Downloads

Documentation

Bid Text

704-8013 X81 - Datei	2019 Feb 19	xml 3.6 kB	Download
-------------------------	-------------	---------------	----------

704-8013 doc - Datei	2015 Nov 20	doc 26.1 kB	Download
-------------------------	-------------	----------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

System Description

WAGO System Wiring, Selection Guide This guide will help you select the appropriate interface modules and system cables for the controller you are using.		pdf 545.9 kB	Download
--	--	-----------------	----------

CAD/CAE-Data

CAE data

EPLAN Data Portal 704-8013	URL	Download
WSCAD Universe 704-8013	URL	Download

Environmental Product Compliance

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Compliance Search

Environmental Product Compliance 704-8013	URL	Download
Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.