


Data sheet | Item number: 706-2300/301-200

System cable; for Siemens S7-300; 2 x 16 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

www.wago.com/706-2300/301-200

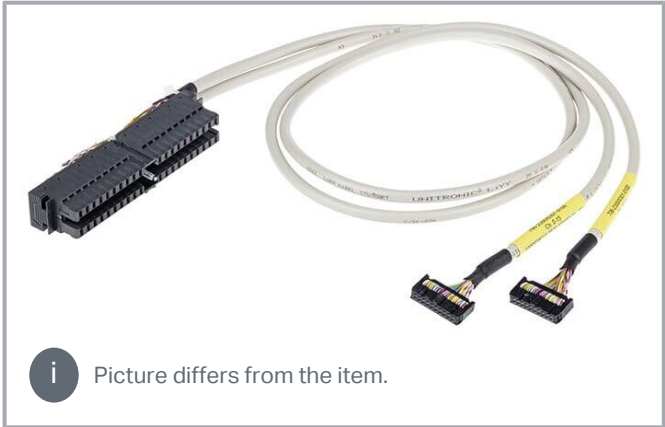

Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-15	20 poles flat connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0.0	2	0
Brown	2	0.1	3	1
Green	3	0.2	4	2
Yellow	4	0.3	5	3
Grey	5	0.4	6	4
Pink	6	0.5	7	5
Blue	7	0.6	8	6
Red	8	0.7	9	7
Black	9	1.0	12	0
Violet	10	1.1	13	1
Grey-Pink	11	1.2	14	2
Red-Blue	12	1.3	15	3
White-Green	13	1.4	16	4
Brown-Green	14	1.5	17	5
White-Yellow	15	1.6	18	6
Yellow-Brown	16	1.7	19	7
White-Grey	17	+24V	1	L+
Grey-Brown	18	0V	10	M
White-Pink	19	+24V	11	L+
Pink-Brown	20	0V	20	M

Color coding acc. to DIN VDE 47100 Cable 2; Channel 16-31	20 poles flat connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0.0	22	0
Brown	2	0.1	23	1
Green	3	0.2	24	2
Yellow	4	0.3	25	3
Grey	5	0.4	26	4
Pink	6	0.5	27	5
Blue	7	0.6	28	6
Red	8	0.7	29	7
Black	9	1.0	32	0
Violet	10	1.1	33	1
Grey-Pink	11	1.2	34	2
Red-Blue	12	1.3	35	3
White-Green	13	1.4	36	4
Brown-Green	14	1.5	37	5
White-Yellow	15	1.6	38	6
Yellow-Brown	16	1.7	39	7
White-Grey	17	+24V	21	L+
Grey-Brown	18	0V	30	M
White-Pink	19	+24V	31	L+
Pink-Brown	20	0V	40	M

Data
Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	2 x 16 digital inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Compatibility

Siemens

Siemens S7-300	6ES7 313-5BE01-0AB0
	6ES7 313-5BG04-0AB0
	6ES7 313-6BE01-0AB0
	6ES7 313-6BF03-0AB0
	6ES7 313-6CE01-0AB0
	6ES7 313-6CF03-0AB0
	6ES7 314-6BF01-0AB0
	6ES7 314-6BG03-0AB0
	6ES7 314-6CF01-0AB0
	6ES7 314-6CG03-0AB0
	6ES7 321-1BP00-0AA0
	6ES7 321-1BL00-0AA0
	6ES7 321-1BL80-0AA0
	6ES7 322-1BL00-0AA0
	6ES7 323-1BL00-0AA0

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Connection type 1	System
Wire cross-section	0.14 mm ²

Connection 2

Connector 2	Pluggable connector per DIN 41651; female connector
Pole number 2	20
Connection type 2	System

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Connection 3

Connector 3	Siemens 6ES7-392-1BM00-0AA0
Pole number 3	20
Connection type 3	System

Physical data

Cable length	2 m
--------------	-----

Material data

Weight	405 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

Product Group	30 (WAGO France)
eCl@ss 10.0	27-24-22-20
eCl@ss 9.0	27-24-22-20
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Country of origin	FR
GTIN	4045454873899
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Optional accessories

Interface module

Interface module



Item no.: 704-2004

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 1-wire connection; in mounting carrier

www.wago.com/704-2004

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 704-2054**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 3-wire connection; in mounting carrier

www.wago.com/704-2054**Item no.: 704-2044**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 2-wire connection; in mounting carrier

www.wago.com/704-2044**Item no.: 704-5014**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Double-deck PCB terminal blocks; without relay; in mounting carrier; 2,50 mm²

www.wago.com/704-5014**Item no.: 704-2024**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 2-wire connection; in mounting carrier

www.wago.com/704-2024**Item no.: 704-5004**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Double-deck PCB terminal blocks; in mounting carrier; 2,50 mm²

www.wago.com/704-5004**Item no.: 289-614**

Interface module; Pluggable connector per DIN 41651; 20-pole; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm²

www.wago.com/289-614**Item no.: 704-5024**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm²

www.wago.com/704-5024**Item no.: 704-5054**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 make contact; with disconnect terminal block and fuse; in mounting carrier; 2,50 mm²

www.wago.com/704-5054**Item no.: 704-5064**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 2 changeover contacts; Double-deck PCB terminal blocks; in mounting carrier; 2,50 mm²

www.wago.com/704-5064**Item no.: 704-5074**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 make contact; with disconnect terminal block and fuse; in mounting carrier; 2,50 mm²

www.wago.com/704-5074**Item no.: 704-5034**

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; PCB terminal blocks; with output fuse; in mounting carrier; 2,50 mm²

www.wago.com/704-5034**Item no.: 704-5044**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Triple-deck PCB terminal blocks; with manual operation; in mounting carrier; 2,50 mm²

www.wago.com/704-5044

Downloads Documentation

Bid Text

706-2300/301-200 X81 - Datei	2019 Feb 19	xml 3.2 kB	Download
706-2300/301-200 doc - Datei	2015 Feb 9	doc 26.1 kB	Download

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

System Description

WAGO System Wiring, Selection Guide This guide will help you select the appropriate interface modules and system cables for the controller you are using.		pdf 545.9 kB	Download
--	--	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 706-2300/301-200	URL	Download
WSCAD Universe 706-2300/301-200	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/301-200 System cable; for Siemens S7-300; 2 x 16 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm ²	URL	Download
--	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.