


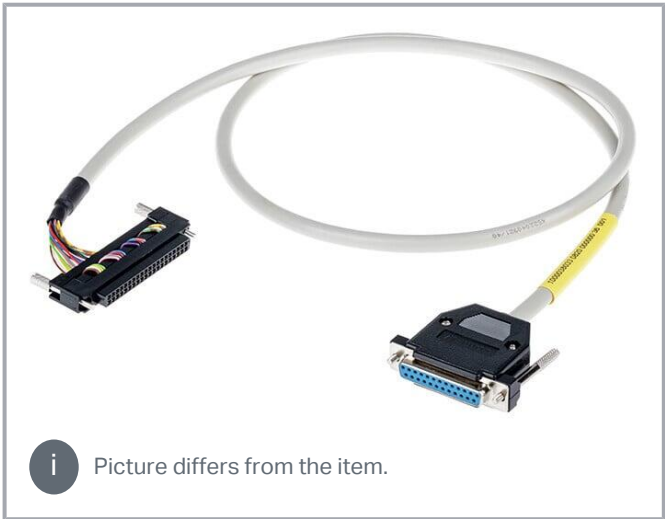

Color coding acc. to DIN VDE 47100		25 poles Sub-D connector		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	IN0+	17A	MS0+
Brown		2	IN0-	17B	MS0-
Green		3	IN1+	16A	EX0+
Yellow		4	IN1-	16B	EX0-
Grey		5	IN2+	12A	MS1+
Pink		6	IN2-	12B	MS1-
Blue		7	IN3+	11A	EX1+
Red		8	IN3-	11B	EX1-
Black		9	IN4+	7A	MS2+
Violet		10	IN4-	7B	MS2-
Grey-Pink		11	IN5+	6A	EX2+
Red-Blue		12	IN5-	6B	EX2-
White-Green		13	IN4+	2A	MS3+
Brown-Green		14	IN4-	2B	MS3-
White-Yellow		15	IN5+	1A	EX3+
Yellow-Brown		16	IN5-	1B	EX3-
White-Grey		17	nc	nc	nc
Grey-Brown		18	nc	nc	nc
White-Pink		19	nc	nc	nc
Pink-Brown		20	nc	nc	nc
White-Blue		21	nc	nc	nc
Brown-Blue		22	nc	nc	nc
White-Red		23	nc	nc	nc
Brown-Red		24	nc	nc	nc
White-Black		25	nc	nc	nc
Shield		Connected to Sub-D			

Data
Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	4 analog inputs; for RTD
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Compatibility

Schneider

Schneider Modicon M340	BMX ART 0414 BMX ART 0814
------------------------	------------------------------

Connection data

Cable type	LIYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature female connector
Pole number 1	25
Connection type 1	System
Wire cross-section	0.25 mm ²

Connection 2

Connector 2	Fujitsu FCN-367-J40/AU/H
Pole number 2	40
Connection type 2	System

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	267 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Commercial data

Product Group	30 (WAGO France)
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Country of origin	FR
GTIN	4050821240143
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3340/402-300	URL	Download
System cable; for Schneider Modicon M340; 4 analog inputs for RTD; Length: 3 m; Conductor cross-section: 0.25 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.