


Data sheet | Item number: 706-3340/404-300

System cable; for Schneider Modicon M340; 8 analog inputs (current);

Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-3340/404-300

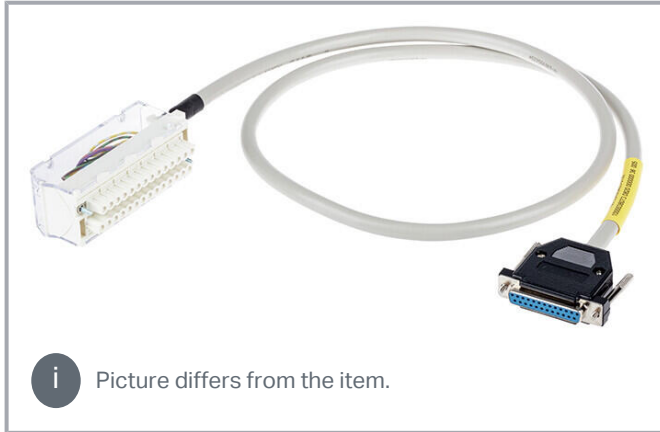

Color coding acc. to DIN VDE 47100		25 poles Sub-D connector		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	IN/OUT0.0	1-3	II0-VI0
Brown		2	IN/OUT0.1	2	Com0
Green		3	IN/OUT0.2	4-6	II1-VI1
Yellow		4	IN/OUT0.3	5	Com1
Grey		5	IN/OUT0.4	7-9	II2-VI2
Pink		6	IN/OUT0.5	8	Com2
Blue		7	IN/OUT0.6	10-12	II3-VI3
Red		8	IN/OUT0.7	11	Com3
Black		9	IN/OUT1.0	15-17	II4-VI4
Violet		10	IN/OUT1.1	16	Com4
Grey-Pink		11	IN/OUT1.2	18-20	II5-VI5
Red-Blue		12	IN/OUT1.3	19	Com5
White-Green		13	IN/OUT1.4	21-23	II6-VI6
Brown-Green		14	IN/OUT1.5	22	Com6
White-Yellow		15	IN/OUT1.6	24-26	II7-VI7
Yellow-Brown		16	IN/OUT1.7	25	Com7
White-Grey		17	+24V	nc	nc
Grey-Brown		18	0V	nc	nc
White-Pink		19	+24V	nc	nc
Pink-Brown		20	0V	nc	nc
White-Blue		21	nc	nc	nc
Brown-Blue		22	nc	nc	nc
White-Red		23	nc	nc	nc
Brown-Red		24	1	nc	nc
White-Black		25	2	nc	nc
Shield		Connected to Sub-D			

Data Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	8 analog inputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Compatibility

Schneider

Schneider Modicon M340	BMX AMI 0800 BMX AMI 0810
------------------------	------------------------------

Connection data

Cable type	LIYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature female connector
Pole number 1	25
Connection type 1	System
Wire cross-section	0.25 mm ²

Connection 2

Connector 2	Schneider BMXFTB2020
Pole number 2	28
Connection type 2	System

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	426 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Commercial data

Product Group	30 (WAGO France)
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Country of origin	FR
GTIN	4050821435570
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3340/404-300	URL	Download
System cable; for Schneider Modicon M340; 8 analog inputs (current); Length: 3 m; Conductor cross-section: 0.25 mm²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastraße 27
32423 Minden
Phone: +49 571 887-0 | Fax: +49 571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.