


Data sheet | Item number: 706-4756/207-300

System cable; for Rockwell Control Logix; 2 x 16 digital outputs; Length: 3 m;
Conductor cross-section: 0.14 mm²



www.wago.com/706-4756/207-300

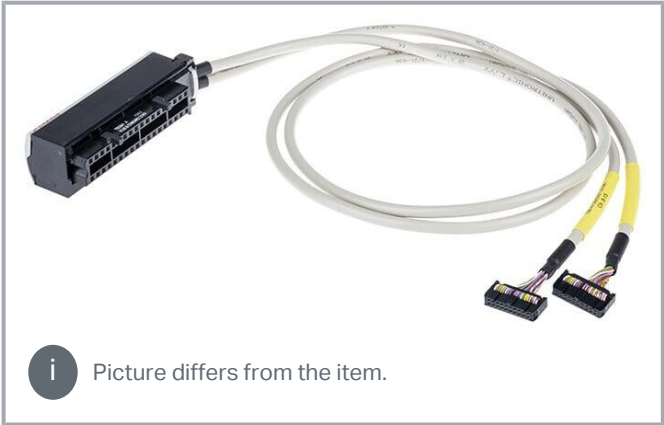

 Picture differs from the item.

Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-15	Interface connector 1			
	20 poles flat connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0.0	1	OUT0
Brown	2	0.1	2	OUT1
Green	3	0.2	3	OUT2
Yellow	4	0.3	4	OUT3
Grey	5	0.4	5	OUT4
Pink	6	0.5	6	OUT5
Blue	7	0.6	7	OUT6
Red	8	0.7	8	OUT7
Black	9	1.0	9	OUT8
Violet	10	1.1	10	OUT9
Grey-Pink	11	1.2	11	OUT10
Red-Blue	12	1.3	12	OUT11
White-Green	13	1.4	13	OUT12
Brown-Green	14	1.5	14	OUT13
White-Yellow	15	1.6	15	OUT14
Yellow-Brown	16	1.7	16	OUT15
White-Grey	17	+(24V)	18	DC0+
Grey-Brown	18	-(0V)	17	RTN OUT0
White-Pink	19	nc	nc	nc
Pink-Brown	20	nc	nc	nc

Color coding acc. to DIN VDE 47100 Cable 2; Channel 16-31	Interface connector 2			
	20 poles flat connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0.0	19	OUT16
Brown	2	0.1	20	OUT17
Green	3	0.2	21	OUT18
Yellow	4	0.3	22	OUT19
Grey	5	0.4	23	OUT20
Pink	6	0.5	24	OUT21
Blue	7	0.6	25	OUT22
Red	8	0.7	26	OUT23
Black	9	1.0	27	OUT24
Violet	10	1.1	28	OUT25
Grey-Pink	11	1.2	29	OUT26
Red-Blue	12	1.3	30	OUT27
White-Green	13	1.4	31	OUT28
Brown-Green	14	1.5	32	OUT29
White-Yellow	15	1.6	33	OUT30
Yellow-Brown	16	1.7	34	OUT31
White-Grey	17	+(24V)	36	DC1+
Grey-Brown	18	-(0V)	35	RTN OUT1
White-Pink	19	nc	nc	nc
Pink-Brown	20	nc	nc	nc

Data
Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	2 x 16 digital outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Compatibility

Rockwell

Rockwell Control Logix	1756 - OB32
------------------------	-------------

Connection data

Cable type	LIYY
Color code	per DIN VDE 47100

Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	20
Connection type 1	System
Wire cross-section	0.14 mm ²

Connection 2

Connector 2	Pluggable connector per DIN 41651; female connector
Pole number 2	20
Connection type 2	System

Connection 3

Connector 3	Allen Bradley 1756-TBS6H/A
Pole number 3	36
Connection type 3	System

Physical data

Cable length	3 m
--------------	-----

Subject to changes. Please also observe the further product documentation!



Material data

Weight	581 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

Product Group	30 (WAGO France)
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Country of origin	FR
GTIN	4045454920951
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-4756/207-300	URL	Download
System cable; for Rockwell Control Logix; 2 x 16 digital outputs; Length: 3 m; Conductor cross-section: 0.14 mm²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.