



Color: —

Data

Material data

Note (material data)

Information on material specifications can be found [here](#)

Subject to changes. Please also observe the further product documentation!

Color	red
Fire load	0.023 MJ
Weight	0.8 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	200 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332812412
Customs tariff number	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

Bid Text

709-170	2019 Feb 19	xml	Download
X81 - Datei		2.6 kB	
709-170	2017 Apr 28	doc	Download
doc - Datei		23.6 kB	

Additional Information

	pdf	Download
	2.3 MB	

CAD/CAE-Data

CAE data

WSCAD Universe 709-170	URL	Download
------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

CAD data

2D/3D Models 709-170

URL

Download

Asset Administration Shell

Asset Administration Shell 709-170

URL

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 709-170

URL

Download

Disconnect lock; for disconnect tab used on 280/281 and 769 Series disconnect terminal blocks; red

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27


32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

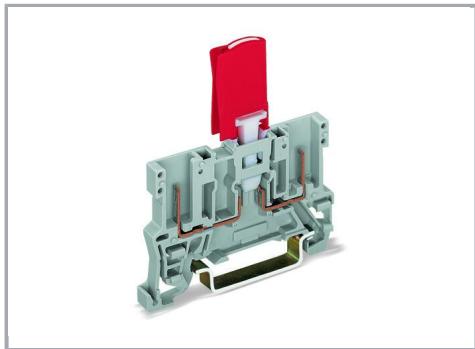

Double Safety:

The disconnect tab has been designed for maximum operational safety.

As soon as the disconnect tab is in the disconnect position, it can be protected against unintentional reconnection by using the disconnect lock.


Only through intentional and deliberate use of a tool, can the disconnect lock be removed and the circuit reconnected.

Features/Benefits:


- Easy to use
- Install/remove disconnect lock with just one hand
- Clearly identify disconnect tab position
- Higher safety
- Intentional effort is required to reconnect the circuit

Installation


Subject to changes. Please also observe the further product documentation!

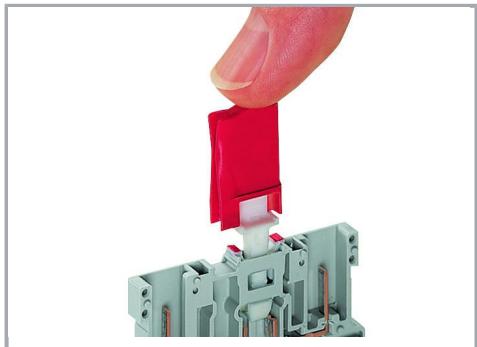

Installing a disconnect lock on the terminal block's disconnect tab.

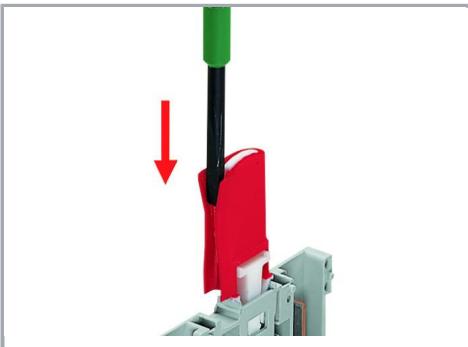

Unlocking a disconnect lock.

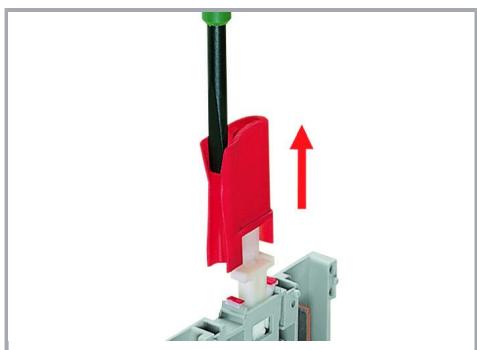

Removing a disconnect lock.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.