

Strain relief plate; for female and male connectors; 1 part; Pin spacing 3.5 mm; light gray



The image contains six technical drawings of cable tie attachments, labeled 1 through 6. Each drawing shows a different configuration of holes and slots for securing cables. The dimensions are as follows:

- Attachment 1:** A long, narrow slot with a width of 6 mm and a length of 12.5 mm.
- Attachment 2:** A rectangular plate with a width of 12.5 mm and a height of 12.5 mm. It has four circular holes arranged in a 2x2 grid, with a center-to-center distance of 12.5 mm between adjacent holes. The distance from the top edge to the center of the top holes is 12.5 mm. The distance from the bottom edge to the center of the bottom holes is 12.5 mm. The distance from the left edge to the center of the left holes is 12.5 mm. The distance from the right edge to the center of the right holes is 12.5 mm. The distance from the top edge to the bottom edge is 12.5 mm. The distance from the left edge to the right edge is 12.5 mm.
- Attachment 3:** A rectangular plate with a width of 25 mm and a height of 10 mm. It has two circular holes arranged horizontally, with a center-to-center distance of 25 mm. The distance from the top edge to the center of the holes is 10 mm. The distance from the bottom edge to the center of the holes is 10 mm. The distance from the left edge to the center of the left hole is 12.5 mm. The distance from the right edge to the center of the right hole is 12.5 mm. The distance from the top edge to the bottom edge is 10 mm. The distance from the left edge to the right edge is 25 mm.
- Attachment 4:** A rectangular plate with a width of 35 mm and a height of 10 mm. It has two circular holes arranged horizontally, with a center-to-center distance of 35 mm. The distance from the top edge to the center of the holes is 10 mm. The distance from the bottom edge to the center of the holes is 10 mm. The distance from the left edge to the center of the left hole is 17.5 mm. The distance from the right edge to the center of the right hole is 17.5 mm. The distance from the top edge to the bottom edge is 10 mm. The distance from the left edge to the right edge is 35 mm.
- Attachment 5:** A rectangular plate with a width of 50 mm and a height of 10 mm. It has four circular holes arranged in a 2x2 grid, with a center-to-center distance of 50 mm between adjacent holes. The distance from the top edge to the center of the top holes is 12.5 mm. The distance from the bottom edge to the center of the bottom holes is 12.5 mm. The distance from the left edge to the center of the left holes is 12.5 mm. The distance from the right edge to the center of the right holes is 12.5 mm. The distance from the top edge to the bottom edge is 10 mm. The distance from the left edge to the right edge is 50 mm.
- Attachment 6:** A rectangular plate with a width of 50 mm and a height of 10 mm. It has four circular holes arranged in a 2x2 grid, with a center-to-center distance of 50 mm between adjacent holes. The distance from the top edge to the center of the top holes is 12.5 mm. The distance from the bottom edge to the center of the bottom holes is 12.5 mm. The distance from the left edge to the center of the left holes is 12.5 mm. The distance from the right edge to the center of the right holes is 12.5 mm. The distance from the top edge to the bottom edge is 10 mm. The distance from the left edge to the right edge is 50 mm.

Width	55 mm / 2.165 inches
Height	1.87 mm / 0.074 inches
Depth	37 mm / 1.457 inches

Suitable for standard male and female connectors (2.5 mm; 3.5 mm; 5 mm; 7.5 mm pin spacing)

Note (material data)	Information on material specifications can be found here
Color	light gray
Fire load	0.08 MJ

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Weight	2.7 g
--------	-------

## Commercial data


Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454163143
Customs tariff number	8538909990

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Approvals / Certificates

### Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

## Downloads

### Documentation

#### Additional Information

2019 Apr 3	pdf 2.1 MB	Download
------------	---------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 734-426	URL	Download
----------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



CAE data

ZUKEN Portal 734-426	URL	Download
Asset Administration Shell		
Asset Administration Shell 734-426	URL	Download


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 734-426	URL	Download
Strain relief plate; for female and male connectors; 1 part; Pin spacing 3.5 mm; light gray		

Installation Notes


Installation

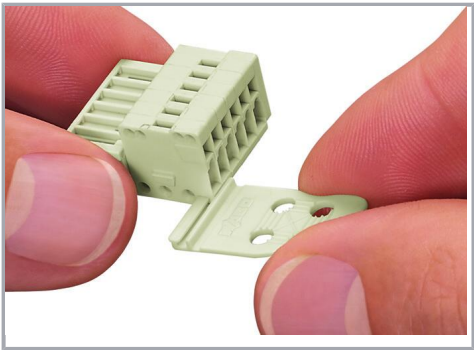

Strain relief plates for factory or in-the-field assembly


Application

Subject to changes. Please also observe the further product documentation!

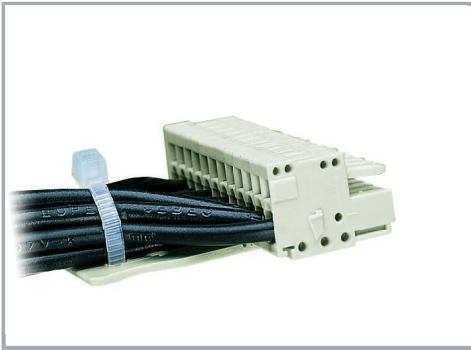

Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
12-pole, with strain relief plate  
733-112/034-000

#### Application

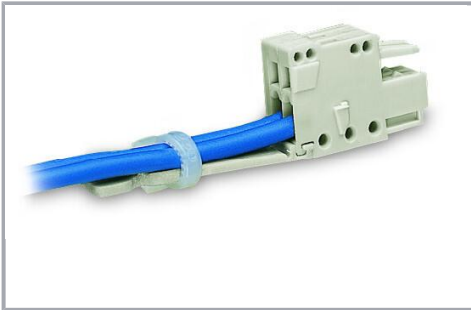

Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
2-pole, with strain relief plate (733-102/032-  
000)

Subject to changes. Please also observe the further product documentation!