


## Data sheet | Item number: 750-528

4-channel digital output; 30 VAC/VDC; 2.0 A; Solid-state; isolated



[www.wago.com/750-528](http://www.wago.com/750-528)

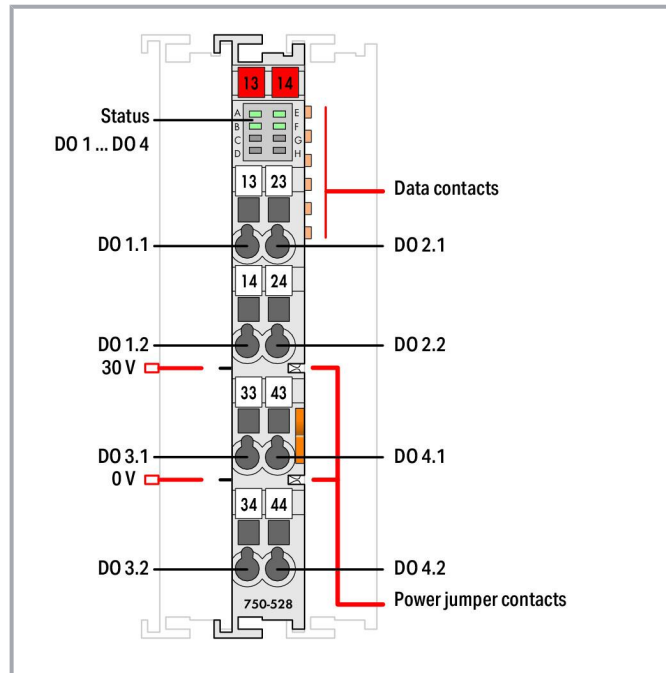

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

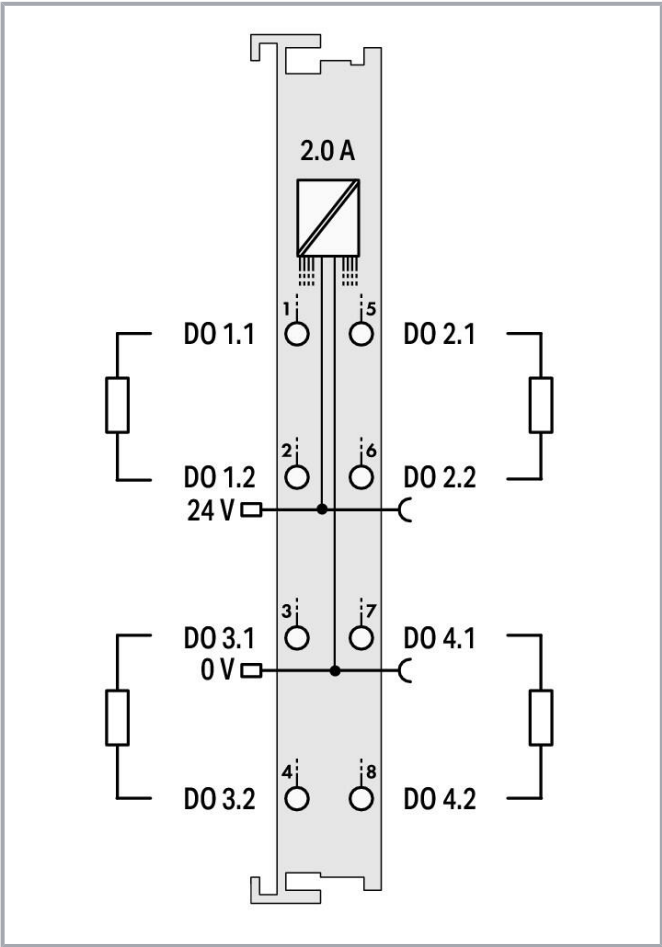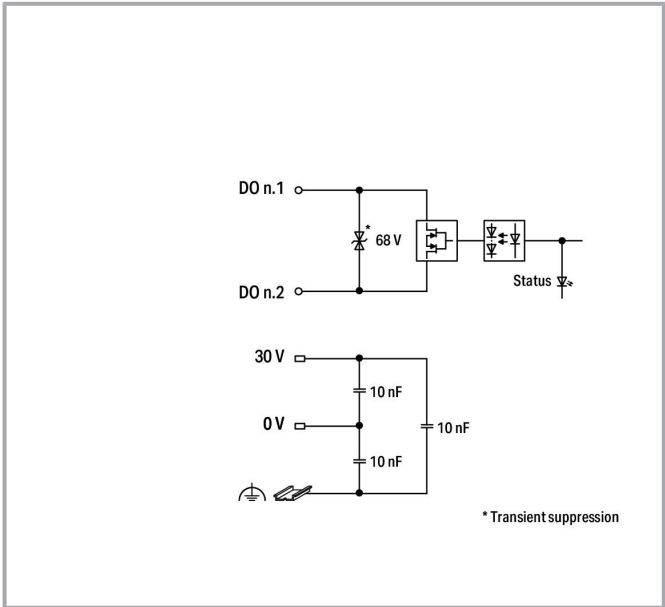

Item description

This digital output module transmits control signals from the automation device to the connected actuators. The module has four semiconductor switches with very low on-resistance MOSFETs suitable for both AC and DC voltages. The semiconductor outputs are not permanently short-circuit proof so external fusing is required. The control of the semiconductor outputs is galvanically isolated from the internal system voltage. Furthermore, the output channels of the 750-528 I/O Module are also electrically isolated from each other. The field supply voltage is fed to the right-hand modules via the power contacts. The signal states for controlling the four digital outputs are indicated by status LEDs.

**Notice:**  
If AC voltages are fed via the power contacts or DC voltages >31.2 V are used, a suitable supply module (e.g., 750-612) must be provided!

Data  
Technical data

|                                   |   |
|-----------------------------------|---|
| Number of digital outputs         | 4 |
| Total number of channels (module) | 4 |

Subject to changes. Please also observe the further product documentation!



| Signal type                                                      | Digital Voltage                                                                                                                               |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Signal type (voltage)                                            | 30 VAC/DC                                                                                                                                     |
| Actuator connection                                              | 4 x (2-wire)                                                                                                                                  |
| Output characteristic                                            | high-side switching                                                                                                                           |
| Output current per channel                                       | 2 A                                                                                                                                           |
| Output current (module)                                          | 8 A                                                                                                                                           |
| Output current                                                   | requires external fuses                                                                                                                       |
| Switching frequency (max.)                                       | 1 Hz                                                                                                                                          |
| Load type                                                        | Resistive; inductive (Limit induction voltage peaks externally.)                                                                              |
| Contact resistance (max.)                                        | 0.04 $\Omega$                                                                                                                                 |
| Contact resistance (typ.)                                        | 0.02 $\Omega$                                                                                                                                 |
| Delay time T <sub>on</sub> from 0 to 1                           | 1000 $\mu$ s                                                                                                                                  |
| Delay time T <sub>off</sub> from 1 to 0                          | 20000 $\mu$ s                                                                                                                                 |
| Inductive load switch-off energy dissipation (max.)              | 0.18 J                                                                                                                                        |
| Output data width (internal) max.                                | 4 bits                                                                                                                                        |
| Supply voltage (system)                                          | 5 VDC; via data contacts                                                                                                                      |
| Current consumption (5 V system supply)                          | 57 mA                                                                                                                                         |
| Supply voltage (field)                                           | 30 VAC/DC, SELV; via power jumper contacts (power supply via blade contact; transmission (supply voltage field side only) via spring contact) |
| Current consumption, field supply (module with no external load) | 0 mA                                                                                                                                          |
| Isolation                                                        | 500 V system/field or channel/channel                                                                                                         |
| Indicators                                                       | LED (A, B, E, F) green: Status DO 1 ... DO 4                                                                                                  |
| Number of incoming power jumper contacts                         | 2                                                                                                                                             |
| Number of outgoing power jumper contacts                         | 2                                                                                                                                             |
| Current carrying capacity (power jumper contacts)                | 10 A                                                                                                                                          |
| Overvoltage category                                             | II                                                                                                                                            |

## Connection data

|                                       |                                              |
|---------------------------------------|----------------------------------------------|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP® (outputs)                    |
| Connection type 1                     | Output                                       |
| Solid conductor                       | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor               | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inches            |

## Physical data

|       |                      |
|-------|----------------------|
| Width | 12 mm / 0.472 inches |
|-------|----------------------|

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                   |                        |
|-----------------------------------|------------------------|
| Height                            | 100 mm / 3.937 inches  |
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

## Mechanical Data

|                     |             |
|---------------------|-------------|
| Mounting type       | DIN-35 rail |
| Pluggable connector | Fixed       |

## Material data

|                    |                              |
|--------------------|------------------------------|
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 0.967 MJ                     |
| Weight             | 54 g                         |
| Conformity marking | CE                           |

## Environmental requirements

|                                                                                    |                                           |
|------------------------------------------------------------------------------------|-------------------------------------------|
| Ambient temperature (operation)                                                    | 0 ... +55 °C                              |
| Ambient temperature (storage)                                                      | -40 ... +85 °C                            |
| Protection type                                                                    | IP20                                      |
| Protection class                                                                   | III                                       |
| Operating altitude                                                                 | 0 ... 2000 m / 0 ... 6562 ft              |
| Mounting position                                                                  | horizontal (standing/lying); vertical     |
| Relative humidity (without condensation)                                           | 95 %                                      |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                      |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                    |
| EMC immunity to interference                                                       | per EN 61000-6-1, -2; marine applications |
| EMC emission of interference                                                       | per EN 61000-6-3, -4; marine applications |
| Exposure to pollutants                                                             | per IEC 60068-2-42 and IEC 60068-2-43     |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                    |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                    |

## Commercial data

|              |          |
|--------------|----------|
| ETIM 8.0     | EC001599 |
| ETIM 7.0     | EC001599 |
| Recupel Type |          |

Subject to changes. Please also observe the further product documentation!



|                       |               |
|-----------------------|---------------|
| PU (SPU)              | 1 pcs         |
| Packaging type        | box           |
| Country of origin     | DE            |
| GTIN                  | 4066966082524 |
| Customs tariff number | 85371098990   |

## Environmental Product Compliance

|                                           |                                           |
|-------------------------------------------|-------------------------------------------|
| CAS-No.                                   | 1303-86-2<br>1317-36-8<br>7439-92-1       |
| REACH Candidate List Substance            | Diboron trioxide<br>Lead<br>Lead monoxide |
| RoHS Compliance Status                    | Compliant, With Exemption                 |
| RoHS Exemption                            | 6(c)<br>7(a)<br>7(c)-I<br>7(c)-II         |
| SCIP notification number (Austria)        | 9780103d-4209-4063-9caa-ed782ef7f5b2      |
| SCIP notification number (Belgium)        | ab88f967-2739-4bfe-acaa-0233dcab727a      |
| SCIP notification number (Bulgaria)       | 0b7de003-f985-4228-915a-a012e4496469      |
| SCIP notification number (Czech Republic) | b8200a71-6d91-43ec-9252-b9bafaf6e7c0      |
| SCIP notification number (Denmark)        | 3f6ad7ac-0a14-464a-80a0-e5404a50e251      |
| SCIP notification number (Finland)        | c9e33524-b142-49a0-afee-7abbb270aa2f      |
| SCIP notification number (France)         | a5128dc1-dd50-49fe-b632-661632365b42      |
| SCIP notification number (Germany)        | c69938f2-30ac-4739-8953-765224cf5228      |
| SCIP notification number (Hungary)        | 83debe4d-8b07-46f6-b286-e9797b3ac8e4      |
| SCIP notification number (Italy)          | 34b13db9-bae6-4785-810a-23ba751084c0      |
| SCIP notification number (Netherlands)    | 43adf4c8-f135-4cf8-a8cc-704ad9092ca9      |
| SCIP notification number (Poland)         | eaea6b07-1b20-49d8-9d07-97c9da9ad76d      |
| SCIP notification number (Romania)        | af29cf77-e8da-44c6-9a01-10b6e6603529      |
| SCIP notification number (Sweden)         | 9e61c717-c9f8-40d9-948f-f3b256a6678f      |

## Approvals / Certificates

### General approvals

| Logo | Approval                               | Additional Approval Text | Certificate name             |
|------|----------------------------------------|--------------------------|------------------------------|
|      | EAC<br>Brjansker Zertifizierungsstelle | TP TC 020/2011           | EAC RU C-DE.AM02.<br>B.00087 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.




UL  
Underwriters Laboratories Inc. (ORDINARY LOCATIONS) - E175199

Declarations of conformity and manufacturer's declarations

| Logo                                                                             | Approval                                           | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|----------------------------------------------------|--------------------------|------------------|
|  | EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |

Approvals for hazardous areas

| Logo                                                                               | Approval                                                   | Additional Approval Text | Certificate name                              |
|------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------|-----------------------------------------------|
|    | ATEX<br>TUEV Nord Cert GmbH                                | -                        | TUEV14ATEX148929X<br>(II 3 G Ex ec IIC T4 Gc) |
|  | CCCEX<br>CQST/CNEX                                         | -                        | 2020312310000213<br>(Ex ec IIC T4 Gc)         |
|  | IECEX<br>TUEV Nord Cert GmbH                               | -                        | IECEX TUN 14.0035 X<br>(Ex ec IIC T4 Gc)      |
|  | UL<br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | UL 121201                | E198726 Sec.1                                 |

Optional accessories

Shield termination

| Shield clamping saddles                                                           |                                                                                                        |                                                                |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 790-116<br>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm | <a href="http://www.wago.com/790-116">www.wago.com/790-116</a> |
|  | Item no.: 790-124                                                                                      |                                                                |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-108**

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**Supply module**

Supply module

**Item no.: 750-612**

Power Supply; 0 ... 230 V AC/DC

[www.wago.com/750-612](http://www.wago.com/750-612)**Marking accessories**

Marker carrier

**Item no.: 750-103**

Group marker carrier

[www.wago.com/750-103](http://www.wago.com/750-103)

Marker

**Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue /000-006

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145](http://www.wago.com/2009-145)  
/000-002**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray /000-007

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red /000-005

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange /000-012

[www.wago.com/2009-145](http://www.wago.com/2009-145)  
/000-012

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)

**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)

**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)

**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)

**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)

**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)

**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)

**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)

**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)

**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)

**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)

**Item no.: 750-100**

Marker card; as a DIN A4 sheet; plain

[www.wago.com/750-100](http://www.wago.com/750-100)

Group marker carrier

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.





**Item no.: 750-106**  
Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)

## System housing

### System enclosure



**Item no.: 850-814/002-000**  
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)



**Item no.: 850-815/002-000**  
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

[www.wago.com/850-815/002-000](http://www.wago.com/850-815/002-000)



**Item no.: 850-816/002-000**  
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)



**Item no.: 850-817/002-000**  
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)



**Item no.: 850-825**  
IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)



**Item no.: 850-826**  
IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)



**Item no.: 850-827**  
IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)



**Item no.: 850-827/002-000**  
IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)



**Item no.: 850-826/002-000**  
IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)



**Item no.: 850-828/002-000**  
IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)



**Item no.: 850-828**  
IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)



**Item no.: 850-834**  
IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-835](http://www.wago.com/850-835)**Item no.: 850-836**

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)**Carrier rail**

## Mounting accessories

**Item no.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[www.wago.com/210-197](http://www.wago.com/210-197)**Item no.: 210-198**


Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-504](http://www.wago.com/210-504)**Item no.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-505](http://www.wago.com/210-505)**Item no.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-506](http://www.wago.com/210-506)**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-508](http://www.wago.com/210-508)**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-113](http://www.wago.com/210-113)**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-118](http://www.wago.com/210-118)**Item no.: 210-112**


Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

[www.wago.com/210-112](http://www.wago.com/210-112)**Item no.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-114](http://www.wago.com/210-114)**Item no.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

[www.wago.com/210-115](http://www.wago.com/210-115)**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



## Downloads

### Documentation

#### Manual

|                                                                              |                        |               |          |
|------------------------------------------------------------------------------|------------------------|---------------|----------|
| System Manual WAGO I/O System 750/753<br>Decentralized Automation Technology | V 3.3.3<br>2023 Aug 29 | pdf<br>8.7 MB | Download |
| Product Manual 4DO AC/DC 30 V; SSR Isolated                                  | V 1.0.0<br>2020 Aug 27 | pdf<br>2.9 MB | Download |
| System Manual Series 750/753<br>Online HTML                                  |                        | URL           | Download |

#### Bid Text

|                         |  |                 |          |
|-------------------------|--|-----------------|----------|
| 750-528<br>docx - Datei |  | docx<br>17.1 kB | Download |
| 750-528<br>X81 - Datei  |  | xml<br>7.2 kB   | Download |

#### Additional Information

|                                                                                     |                        |               |          |
|-------------------------------------------------------------------------------------|------------------------|---------------|----------|
| Disposal and Recycling<br>Electrical and electronic equipment, Batteries, Packaging | V 1.1.0<br>2022 Aug 18 | pdf<br>2.2 MB | Download |
|-------------------------------------------------------------------------------------|------------------------|---------------|----------|

#### System Description

|                                                         |  |                 |          |
|---------------------------------------------------------|--|-----------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>976.2 kB | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals               |  | pdf<br>223.5 kB | Download |

## CAD/CAE-Data

#### CAE data

|                           |  |     |          |
|---------------------------|--|-----|----------|
| ZUKEN Portal 750-528      |  | URL | Download |
| EPLAN Data Portal 750-528 |  | URL | Download |

#### CAD data

|                      |  |     |          |
|----------------------|--|-----|----------|
| 2D/3D Models 750-528 |  | URL | Download |
|----------------------|--|-----|----------|

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Asset Administration Shell

|                                    |     |          |
|------------------------------------|-----|----------|
| Asset Administration Shell 750-528 | URL | Download |
|------------------------------------|-----|----------|

Environmental Product Compliance

Compliance Search

|                                                                    |     |          |
|--------------------------------------------------------------------|-----|----------|
| Environmental Product Compliance 750-528                           | URL | Download |
| 4-channel digital output; 30 VAC/VDC; 2.0 A; Solid-state; isolated |     |          |

Installation Notes

Product family

WAGO I/O System 750/753  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.