
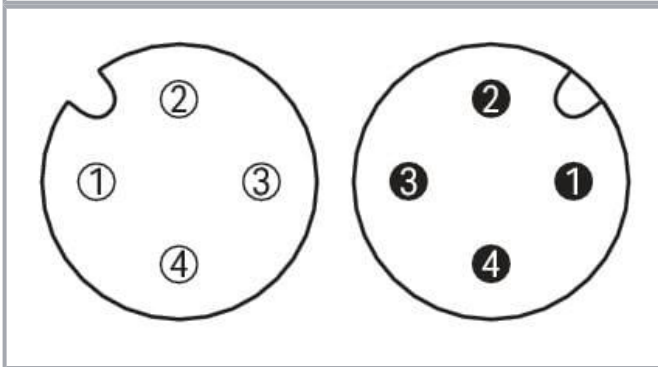


## Data sheet | Item number: 756-3106/040-020

Power cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 2 m

[www.wago.com/756-3106/040-020](http://www.wago.com/756-3106/040-020)

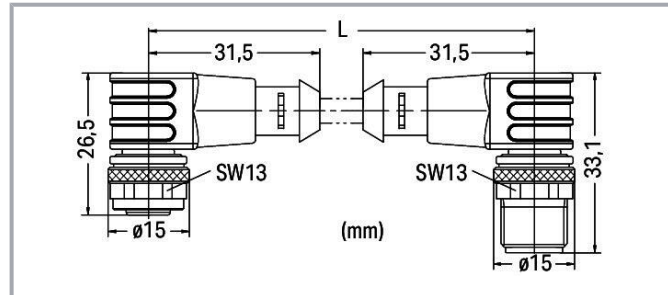

Pin 1 ... 4: 0.75 mm<sup>2</sup>

1	brown	■	1
2	white	■	2
3	blue	■	3
4	black	■	4

### Item description

#### Short description:

- PUR, halogen-free
- UL / CSA
- Suitable for drag chains
- Silicon- and CFC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



## Data

### Technical data

Connection type	M12 socket - M12 plug
Pole number	4
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Connector interface coding (cable/adaptor) 2 1	A-coded
Cable length	2 m
PLC manufacturer	WAGO
Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Insulation resistance	>10 <sup>9</sup> Ω
Conductor resistance	≤ 26 Ω/km

### Mechanical Data

Bending radius	10 x cable diameter (min.) for flexible application
Bending cycles	4 Mio.
Drag chain capability	yes
Sheathed cable diameter	6 ... 6.4 mm
Type code	Lif9YH-11YH 4x0.75 mm <sup>2</sup>
Conductor configuration	Bare copper wire (40 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	134 g

### Environmental requirements

Ambient (operating) temperature (dynamic)	-30 ... +80 °C
Ambient (operating) temperature (static)	-30 ... +80 °C
Protection type	IP67
Pollution degree	3/2 per IEC 60664-1

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

**Commercial data**

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454127084
Customs tariff number	85444290900

**Environmental Product Compliance**

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	ce3f444d-693a-4e98-849d-86daff7aac0c
SCIP notification number (Belgium)	5f2aaf57-c37f-460f-94cc-43c453b973ed
SCIP notification number (Bulgaria)	67138fe4-467c-406f-9c7a-4a01f00d5155
SCIP notification number (Czech Republic)	2bbe7383-210f-41bc-9ad9-4d05c6800cb9
SCIP notification number (Denmark)	c4d46531-8604-4bf5-a555-bd7362a6c170
SCIP notification number (Finland)	1a880cd5-d2e1-46d4-83cb-454f1d63521c
SCIP notification number (France)	9661898d-41dd-4156-8242-24e2a7e21c0f
SCIP notification number (Germany)	347135e1-92e5-4cf1-a80f-9bb03cebe7ed
SCIP notification number (Hungary)	a37dbc8e-b58f-4ef1-8f8c-f375f3379985
SCIP notification number (Italy)	df7ec795-b421-427e-a9dc-05f3c3d2601b
SCIP notification number (Netherlands)	b13cb0fd-0c2c-452e-a91e-f9826ebacd3a
SCIP notification number (Poland)	354f2c31-6a49-4b92-b865-04b0e81b7c90
SCIP notification number (Romania)	f4c1490e-9552-4287-bf24-e9d5b6b7564e
SCIP notification number (Sweden)	799ff77b-2bf1-45be-b1c0-6f4baef6f2bb

**Approvals / Certificates****General approvals**

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Underwriters Laboratories Inc.

## Downloads

### Documentation

#### System Description

I/O-SYSTEM – SPEEDWAY, General Product Information	pdf 1.1 MB	Download
--	---------------	----------

## CAD/CAE-Data

### CAE data

WSCAD Universe 756-3106/040-020	URL	Download
WSCAD Universe 756-3106/040-020	URL	Download

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-3106/040-020 Power cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 2 m	URL	Download
---	-----	----------

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.