



Data sheet | Item number: 756-5204/030-020

Sensor/Actuator cable; M8 socket; angled; M8 plug; angled; 3-pole; Length: 2 m


www.wago.com/756-5204/030-020



 Picture differs from the item.

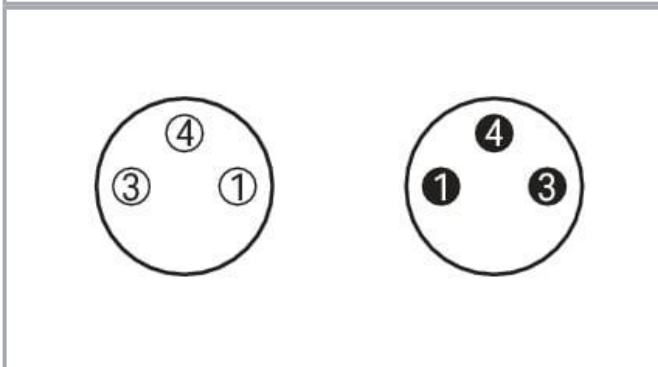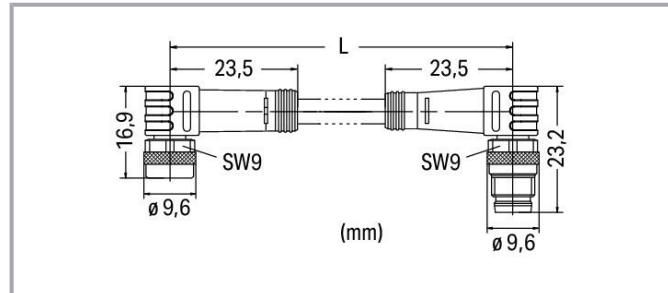

Pin 1 ... 4: 0.25 mm²

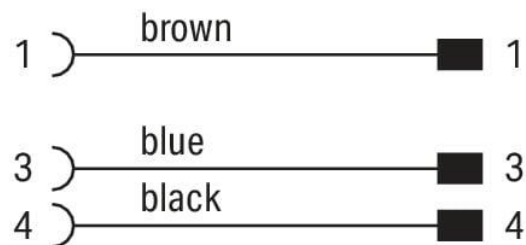

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Data****Technical data****General information**

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$> 10^9 \Omega$
Contact resistance	10 m Ω
Conductor resistance	$\leq 60 \Omega/\text{km}$
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 socket - M8 plug
-----------------	---------------------

Subject to changes. Please also observe the further product documentation!



Pole number	3
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918974660
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	05ad0fa2-3916-4707-a477-0a6d6ec8432b
SCIP notification number (Belgium)	e47daa6e-475d-449b-b171-e38abe938b1f
SCIP notification number (Bulgaria)	40f23b61-2722-4c91-853c-f949670277db
SCIP notification number (Czech Republic)	a0a888d7-9b15-4e5b-9f5c-a6b4fab6196e
SCIP notification number (Denmark)	03066b58-94de-4c53-978d-634e8f399bec
SCIP notification number (Finland)	d65b4228-f9bd-4992-b961-a3eb24dff25
SCIP notification number (France)	edb902e7-2931-4ebb-a027-2eca7813b0fe
SCIP notification number (Germany)	65c05eef-fef3-4201-95ac-61dc2311743f
SCIP notification number (Hungary)	0dd9deee-d342-4293-a8de-5ee84e8deb11
SCIP notification number (Italy)	617b60aa-17fe-4cf4-8bac-40694e7992ce
SCIP notification number (Netherlands)	997e6314-d56e-42b4-95b6-51406da221dd
SCIP notification number (Poland)	d26bf6c1-4401-4f03-9e60-315296ae9c93
SCIP notification number (Romania)	62c92da8-5080-4e7e-a5cc-759911998a1e
SCIP notification number (Sweden)	08e6f6b8-81cb-412d-9ede-63dca00ae8e6

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Commercial data

eCl@ss 9.0
ETIM 8.0
ETIM 7.0
Customs tariff number

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5204/030-020 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5204/030-020 doc - Datei	2017 Sep 20	doc 26.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5204/030-020	URL	Download
WSCAD Universe 756-5204/030-020	URL	Download

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5204/030-020	URL	Download
Sensor/Actuator cable; M8 socket; angled; M8 plug; angled; 3-pole; Length: 2 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.