



Data sheet | Item number: 756-5508/040-020

Sensor/Actuator cable; M8 socket; straight; M12A plug; angled; 4-pole;
Length: 2 m

www.wago.com/756-5508/040-020



 Picture differs from the item.

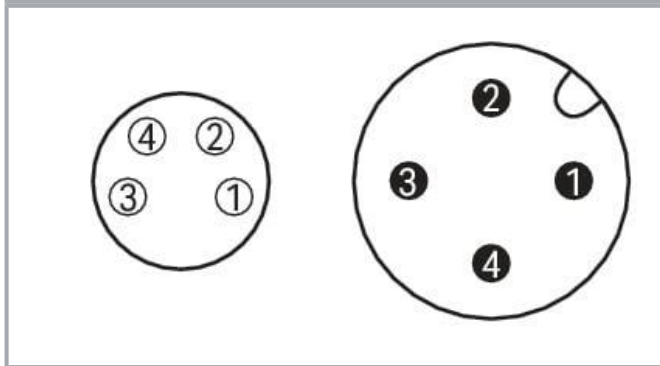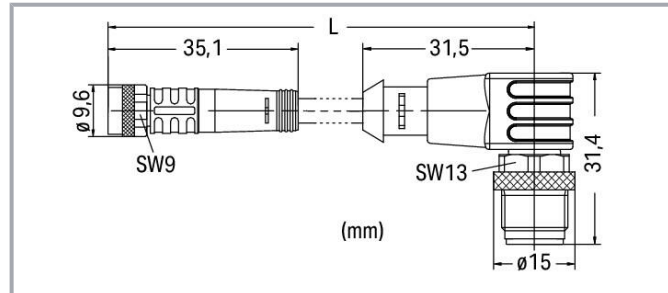

Pin 1 ... 4: 0.25 mm²

1	brown	1
2	white	2
3	blue	3
4	black	4

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Data****Technical data****General information**

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$> 10^9 \Omega$
Contact resistance	10 m Ω
Conductor resistance	$\leq 60 \Omega/\text{km}$
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 socket - M12 plug
-----------------	----------------------

Subject to changes. Please also observe the further product documentation!



Pole number	4
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918975964
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	9525e59f-6d7c-4862-a7f7-0a3b24e20704
SCIP notification number (Belgium)	a0d278ab-4022-4556-ae1c-2feaf7865ade
SCIP notification number (Bulgaria)	38946b5c-5521-41a9-a425-c781d78bf16d
SCIP notification number (Czech Republic)	f24bb182-a7fe-421f-94ce-dbc67228d026
SCIP notification number (Denmark)	788578a2-84f1-4023-a6c9-237b772499eb
SCIP notification number (Finland)	96a3280d-d710-4491-8a72-da9242f330ad
SCIP notification number (France)	fa5143fe-9482-44d4-8d36-fc90e7d87033
SCIP notification number (Germany)	fb606ca2-bbd2-438d-901c-2b7e444b56ed
SCIP notification number (Hungary)	009fe00e-6377-46cc-b461-f6bc5fd2b523
SCIP notification number (Italy)	a03c0eac-28c4-4c28-a0a3-f1dfc17b4a4b
SCIP notification number (Netherlands)	e0009612-3fae-4f34-970e-3d5ea4a60ee8
SCIP notification number (Poland)	7038b7df-2dc2-4298-84b8-0e6963c0c9a0
SCIP notification number (Romania)	3f57e699-3419-4050-9aeb-69442b95435f

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Sweden)

3c220214-a0a0-44cd-bb1d-1b21bc53f0cc

Commercial data

eCl@ss 9.0

ETIM 8.0

ETIM 7.0

Customs tariff number

Downloads

Documentation

Bid Text

756-5508/040-020 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
---------------------------------	-------------	---------------	----------

756-5508/040-020 doc - Datei	2017 Sep 20	doc 26.1 kB	Download
---------------------------------	-------------	----------------	----------

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5508/040-020	URL	Download
---------------------------------	-----	----------

WSCAD Universe 756-5508/040-020	URL	Download
---------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5508/040-020 Sensor/Actuator cable; M8 socket; straight; M12A plug; angled; 4-pole; Length: 2 m	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.