




Data sheet | Item number: 756-5404/060-020

Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 5-pole;
Length: 2 m

www.wago.com/756-5404/060-020



 Picture differs from the item.

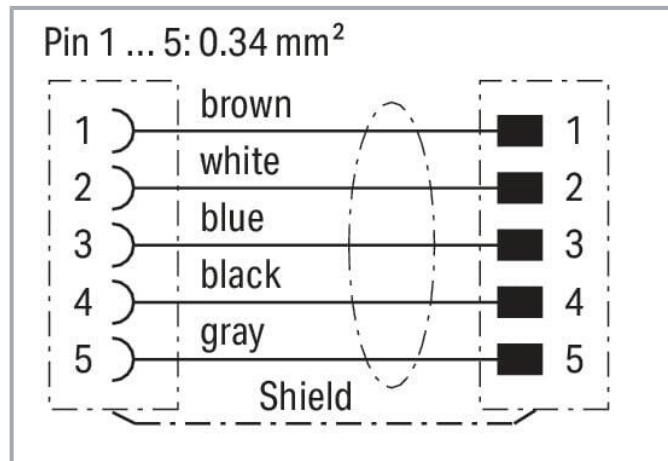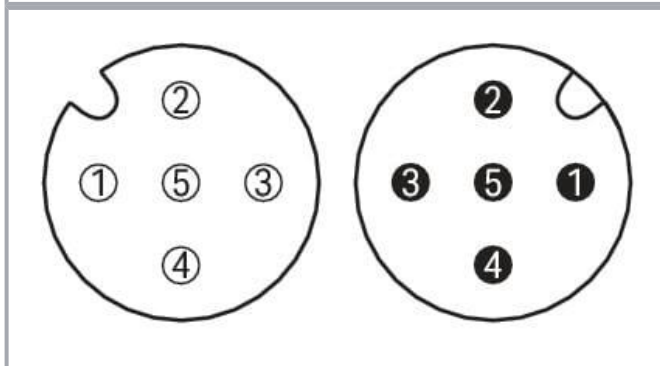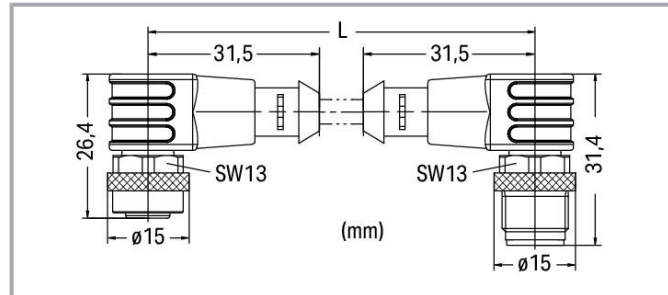

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data

Technical data

General information

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$\geq 1.6 \times 10^{10} \Omega/\text{km}$
Contact resistance	10 m Ω
Conductor resistance	< 57 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	Fixed: >4x $\emptyset$; Flexible: >7.5x $\emptyset$
Bending cycles	2 Mio.
Acceleration (min.)	10
Travel speed (max.)	4
Travel path (horizontal) max.	15
Torsional capacity	180

Cable

Cable length	2 m
Type code	Li9YC11Y-HF 5x0.34 mm ²
Overall shield	Tinned copper braid, optical coverage approx. 80 %
Conductor configuration	Bare copper wire (7 x 0.25 mm)
Conductor insulation	Halogen-free PE
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	6.3 ... 6.7 mm

Connector

Connection type	M12 Socket - M12 plug
-----------------	-----------------------

Subject to changes. Please also observe the further product documentation!



Pole number	5
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Connector interface coding (cable/adaptor) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454724702
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	ff8944e5-4a65-49f0-a47c-0775b10aebc6
SCIP notification number (Belgium)	3f49cc5f-28a0-4c5f-98bc-a5878b0d256b
SCIP notification number (Bulgaria)	f6fe30e8-1f8a-4ec1-9885-43fa6233b60e
SCIP notification number (Czech Republic)	141129cc-4de7-49fb-bf9f-0e784ec208da
SCIP notification number (Denmark)	3171fcc2-00de-42c6-ad53-4958e3bca716
SCIP notification number (Finland)	f289d055-d7b3-429a-ba64-1f59cfa346e8
SCIP notification number (France)	c79b07a5-2d01-432d-8688-163f9931ae17
SCIP notification number (Germany)	3a24307e-85be-4125-ba40-d77dac1b6351
SCIP notification number (Hungary)	287b8396-7d2f-40c6-8729-dddb51fa5389
SCIP notification number (Italy)	2723788b-5656-47b5-bac1-ce08c8925463
SCIP notification number (Netherlands)	69bc10ae-35a4-4610-8289-2985d443e1c6
SCIP notification number (Poland)	ba1cf5a8-37a6-458f-8fc1-9c4f867bfeb5

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Romania)	7981dc10-48a3-48ac-be1c-7cfaa994c116
SCIP notification number (Sweden)	417a84d6-cab5-4f59-808a-764ab6faaa9c

Commercial data

eCl@ss 9.0
ETIM 8.0
ETIM 7.0
Customs tariff number

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5404/060-020 X81 - Datei	2019 Feb 19	xml 3.4 kB	Download
756-5404/060-020 doc - Datei	2017 Sep 20	doc 27.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5404/060-020	URL	Download
WSCAD Universe 756-5404/060-020	URL	Download

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5404/060-020	URL	Download
Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 5-pole; Length: 2 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.