



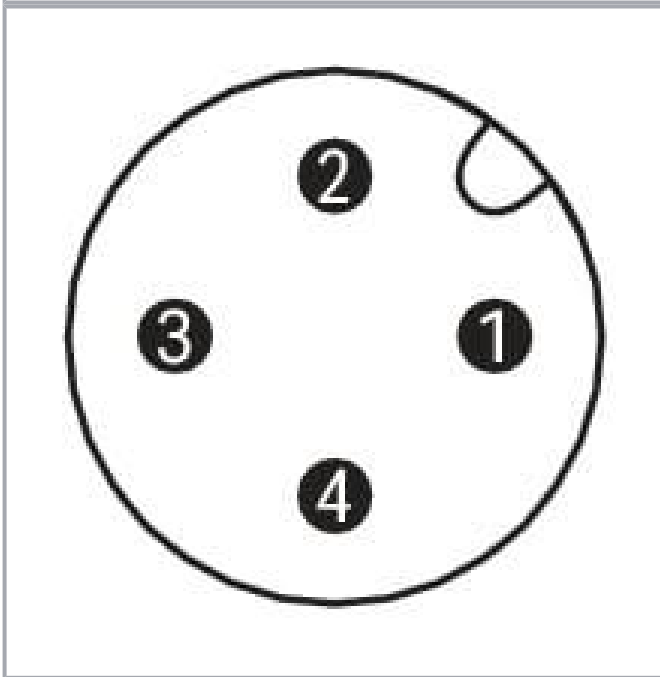

Subject to changes. Please also observe the further product documentation!

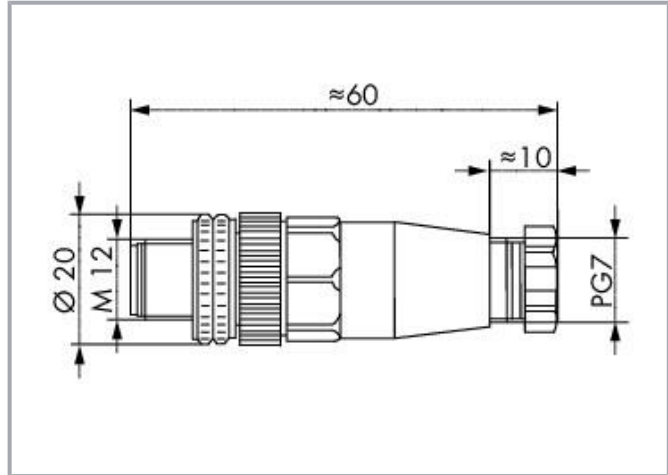

Data

Technical data

Connection type	M12 plug
Pole number	4
Cable connection direction to mating direction	0 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Contact resistance	≤3 mΩ

Connection data

Connection type 1	Screw clamp technology
Solid conductor	0.25 ... 0.75 mm²

Mechanical Data

Connectable sheathed cable diameter	4 ... 6 mm
Housing material	PA
Contact material	CuZn
Contact plating	Gold
Dichtungsmaterial	Sealing ring: neoprene
Mating cycles (max.)	100
Weight	24 g

Environmental requirements

Ambient temperature (operation)	-25 ... +85 °C
Protection type	IP67
Note on protection type	in locked state
Pollution degree	3

Commercial data

eCl@ss 10.0	27-24-26-92
eCl@ss 9.0	27-24-26-92
ETIM 8.0	EC002584
ETIM 7.0	EC002584
PU (SPU)	5 pcs
Packaging type	box
Country of origin	HU

Subject to changes. Please also observe the further product documentation!



GTIN	4044918977401
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads
Documentation

Bid Text

756-9201/040-000 X81 - Datei	2019 Feb 19	xml 2.8 kB	Download
756-9201/040-000 doc - Datei	2017 Sep 20	doc 24.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-9201/040-000	URL	Download
WSCAD Universe 756-9201/040-000	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-9201/040-000 Fitted pluggable connector; 4-pole; M12 plug, straight, A-coded; Screw	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!