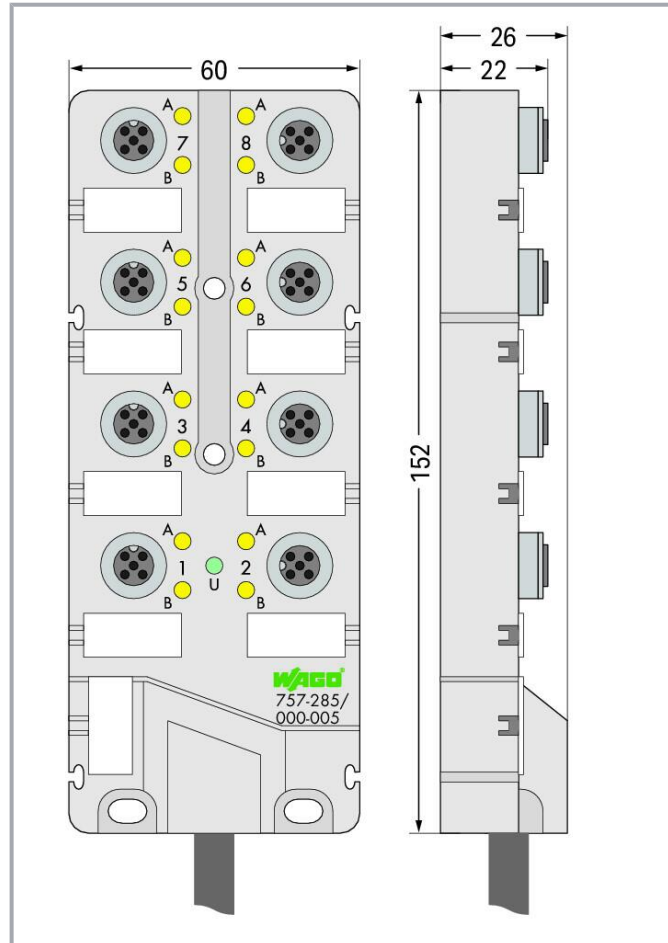


Item description

- M12 sensor/actuator box, 8-way
- 5-pole (2 signals per contact)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Cable length: 5, 10 and 25 m
- Green LED operating indicator
- Yellow LED status indicator
- incl. markers (10 pcs)
- incl. M12 protective caps (2 pcs)

Data

Technical data

Contact resistance (max.)	0.01 Ω
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	9 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	$>10^9 \Omega$
Signal characteristics	PNP
Indicators	LED (A, B) yellow: Signal status (2 x per contact); LED (U) green: Sensor/actuator box status

Connection data

Connection technology: inputs/outputs	8 x M12 socket; 5-pole; incl. ground
Connection technology: trunk cable	1 x Fixed connecting cable
Length of connection cable	25 m
Strip length	100 mm / 3.94 inches
Wire colors	white, gray/pink, green, red/blue, yellow, white/green, gray, brown /green, pink, white/yellow, red, yellow/brown, black, white/gray, purple, gray/brown, green/yellow, brown, blue
Cable design	Wire cross-section: 0.34 mm ² ; Wire cross-section (2): 1 mm ²

Physical data

Width	60 mm / 2.362 inches
Height	26 mm / 1.024 inches
Depth	152 mm / 5.984 inches

Mechanical Data

Mounting type	Screw mounting
Weight	3600 g

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Halogen-free	Yes
Sheathed cable diameter	9.7 mm
Bending radius	10 x cable diameter (min.) for flexible application
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 µm gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Sheath material	PUR
Sheathed cable color	black
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
Ambient (operating) temperature (dynamic)	-5 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +90 °C
Protection type	IP68
Note on protection type	72 h at a depth of 1 m under water per EN 60529 in the fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

eCl@ss 10.0	27-44-01-08
eCl@ss 9.0	27-44-01-08
ETIM 8.0	EC002585
ETIM 7.0	EC002585
Recupel Type	
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454478971
Customs tariff number	85366990990

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	e1cfa99f-74f9-4b27-b1e8-0a360bb6824c
SCIP notification number (Belgium)	497a5fcb-7cee-4410-b9b2-ba449f23aad3
SCIP notification number (Bulgaria)	bc119815-3067-4763-8fc6-cc4ad886a7ac
SCIP notification number (Czech Republic)	fa92d6eb-b10e-49d1-afdd-a7b701a1f6ce
SCIP notification number (Denmark)	b64fdbf7-4807-4b80-ba81-465cdedc8226
SCIP notification number (Finland)	4f12eb12-3bd7-4aab-94b8-ea430b9adf4d
SCIP notification number (France)	4281fb7b-9051-492d-958e-345a80d028ca
SCIP notification number (Germany)	413c5838-8f95-4874-ace6-02843de77321
SCIP notification number (Hungary)	1ba7929b-7153-4c55-9077-2fafb8e2cb24
SCIP notification number (Italy)	7fdb2a63-6a32-4384-b153-98a6b0561d40
SCIP notification number (Netherlands)	e09b0900-ed8f-4f83-9f8f-83cf4757c5a3
SCIP notification number (Poland)	eb772bda-d01e-4831-9524-e3a58fd238ce
SCIP notification number (Romania)	d606683c-fe1f-428e-bee4-51f51c2ca710
SCIP notification number (Sweden)	bdd69e6b-e8a2-4e09-95f6-dfacbc9b49e8

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Optional accessories

Marking accessories

Marking strip



Item no.: 757-011

Marker card; not stretchable; snap-on type

www.wago.com/757-011

Marking device

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 210-110
Fiber-tip pen

www.wago.com/210-110

Mounting

Intermediate plate



Item no.: 757-080
Spacer module for sensor/actuator box; 8-way

www.wago.com/757-080

Cover

Cover



Item no.: 756-8102
M12 protective cap; for unused sockets

www.wago.com/756-8102

Downloads

Documentation

System Description

Sensor/Actuator Boxes – General Product Information	pdf 438.6 kB	Download
---	-----------------	----------

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

CAD/CAE-Data

CAD data

2D/3D Models 757-285/000-025	URL	Download
------------------------------	-----	----------

CAE data

EPLAN Data Portal 757-285/000-025	URL	Download
WSCAD Universe 757-285/000-025	URL	Download
WSCAD Universe 757-285/000-025	URL	Download
EPLAN Data Portal 757-285/000-025	URL	Download
ZUKEN Portal 757-285/000-025	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Asset Administration Shell

Asset Administration Shell 757-285/000-025	URL	Download
--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 757-285/000-025	URL	Download
M12 sensor/actuator box; 8-way; 5-pole; 25 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.