

Data sheet | Item number: 762-4304/8000-002

Touch Panel 600; 25.7 cm (10.1"); 1280 x 800 pixels; 2 x ETHERNET, 2 x USB, CAN, DI/DO, RS-232/485, Audio; Control Panel


www.wago.com/762-4304/8000-002



Touch Panels 600 Communication Options Overview

	CPU	On Board										Product extensions			
		Modbus RTU (RS-485)	Modbus TCP (Ethernet)	Modbus ASCII	Modbus Plus	Modbus CAN	Modbus RS-485	Modbus RS-485	Modbus RS-485	Modbus RS-485	Modbus RS-485	Modbus RS-485	Modbus RS-485	Modbus RS-485	Modbus RS-485
Touch Panels 600 Standard Line	Cortex A9	x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
Touch Panels 600 Advanced Line	Cortex A9	x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
Touch Panels 600 Marine Line	Cortex A9	x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x
		x	x	x	x	x	x	x	x	x	x	x	x	x	x


MC Master, S Slave; *requires an additional license; **requires an additional license (preprocessor: EC 6131 runtime environment; 600 license); ***WagoAppPiModbus Library

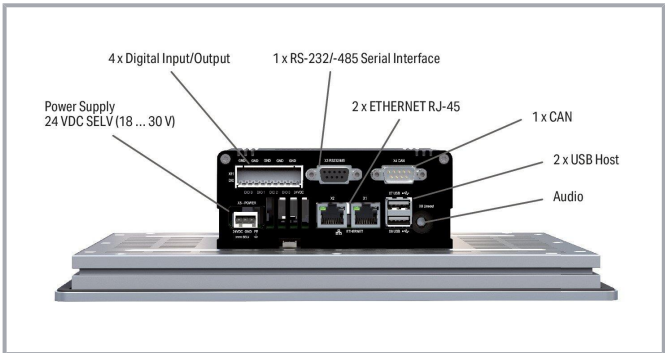

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

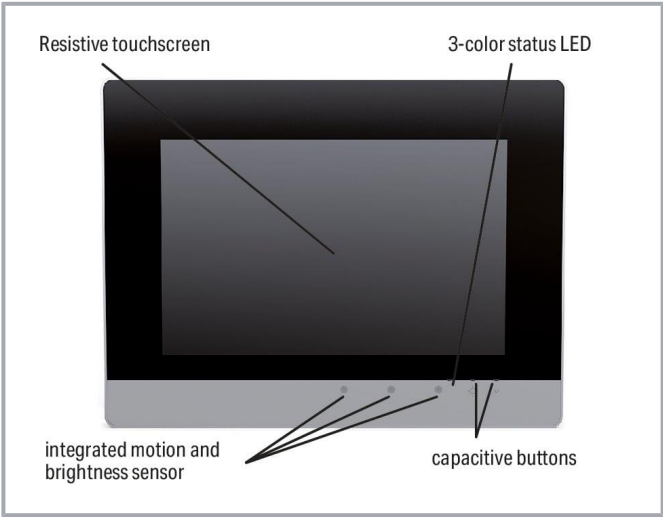

Item description

PIO3 hardware configuration

- 2 x ETHERNET port for connecting to field devices and the engineering tool
- 2 x USB port for optional connection of a USB stick, mouse or keyboard
- Audio interface for connecting a headphone or loudspeaker
- CAN for controlling field devices
- RS-232/485 interface for controlling field devices equipped with a serial interface
- 4 x digital input/output for reading/triggering digital signals
- Power-failure-proof storage component

Data

Technical data

Display diagonal	25.7 cm (10.1 inches)
Display	Resistive touchscreen
Display colors	16 million colors
Graphics resolution	(1280 x 800) px
Contrast ratio	800:1
Viewing angle (horizontal/vertical)	85° / 85°
Brightness	800 cd/m ²
Visualization	Web server Web-Visu Webserver Web Visu Target Visu

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



ETHERNET protocols	DHCP DNS FTP FTPS HTTP HTTPS SSH
Communication	Web browser Web browser (HTML5) Modbus TCP master/slave Modbus (UDP), WagoAppPlcModbus Library Modbus (RTU), WagoAppPlcModbus Library ETHERNET EtherNet/IP™ Adapter (slave) EtherNet/IP™ Scanner CANopen EtherCAT® Master OPC UA Server/Client OPC UA Pub/Sub (can be installed later) MQTT RS-232 serial interface RS-485 interface BACnet/IP, requires an additional license Telecontrol protocols, requires an additional license MicroBrowser (including visualization of CODESYS V2.3), requires an additional license
Operating system	Real-time Linux (with RT-Preempt patch)
Processor	ARM® Cortex® A9 Quadcore 1.0 GHz
Programming environment	CODESYS V3.5, Firmware Release 24 or higher <i>e!COCKPIT</i> (based on CODESYS V3) up to Firmware Release 22
Main memory (RAM)	2,048 MB
Internal memory (flash)	4096 MB
Program memory	32 MB
Data memory	128 MB
Non-volatile software memory	128. Kbytes
Type of memory card	microSD (max. 2 GB); microSDHC (max. 32 GB)
Indicators	Three-color LED (red, green, blue)
Controls	Resistive touch panel, two capacitive keys, proximity sensor
Supply voltage	24 VDC, SELV (18 ... 31.2 V); with reverse voltage protection
Operating power	11.8 W, without USB load; 17.0 W, with USB load

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Connection data

Connection technology: communication/fieldbus	Modbus (TCP, UDP): 2 x RJ-45; EtherNet/IP™: 2 x RJ-45; CANopen: 1 x D-sub 9 plug; Modbus (UDP): 2 x RJ-45; RS-232 + RS-485/-422 serial interface: 1 x D-sub 9 socket; USB: 2 x USB 2.0 host (type A)
Connection technology: supply	1 x Included female connector (734-103) with three CAGE CLAMP® connections

Physical data

Width	293 mm / 11.535 inches
Height	223 mm / 8.78 inches
Depth	78 mm / 3.070 inches
Panel cutout (W x H)	(278 x 208) mm

Mechanical Data

Weight	1602 g
Front panel	

Environmental requirements

Ambient temperature (operation)	-20 ... +55 °C (when mounted vertically; -20 ... +50 °C, other mounting positions)
Ambient temperature (storage)	-20 ... +80 °C
Protection type	IP65
Note on protection type	IP65 (front side); IP20 (rear side), per EN 60529
Relative humidity (without condensation)	90 %
Mounting type	Clamping elements (included) or VESA mount (4 x M4x8)
Fire load	0.003 MJ

Commercial data

ETIM 8.0	EC001414
ETIM 7.0	EC001414
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143825054
Customs tariff number	84714100000

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02.B.00087/19
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-WBP762
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339, Aug. 2021	TAA00001FS

Optional accessories

Memory card

Memory card

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 758-879/000-3102
Memory Card SD Micro; 2 GByte

www.wago.com/758-879/000-3102



Item no.: 758-879/000-3108
Memory Card SD Micro; pSLC-NAND; 8 GB; Temperature range: -40 to 90°C

www.wago.com/758-879/000-3108

Software

Software application



Item no.: 2759-208/211-1000
Library MTP; Single License; Online activation

www.wago.com/2759-208/211-1000

Mounting

Mounting accessories



Item no.: 762-9001
e!DISPLAY7300T ; Clamping elements (4 pieces)

www.wago.com/762-9001



Item no.: 762-9324
Flush-Mounted Housing for Touch Panel 600; 25.7 cm (10.1"); 80.0 mm

www.wago.com/762-9324

Downloads

Documentation

Manual

Product Manual WAGO Touch Panel 600 Standard Line	1.8.0 2023 Dec 4	pdf 4.1 MB	Download
Migration Guide Migration from e!COCKPIT projects to CODESYS V3.5	V 1.3.0 2023 Jul 3	pdf 5.1 MB	Download
Product Manual OPC UA Mapping Editor	V 1.1.0 2022 Mar 11	pdf 3.4 MB	Download
OPC-UA Mapping Editor Online Help HTML		URL	Download
Migrationsleitfaden von e!COCKPIT-Projekten zu CODESYS V3.5 Online Hilfe (HTML)		URL	Download

Bid Text

762-4304/8000-002

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



X81 - Datei	2019 Feb 19	xml 6.1 kB	Download
762-4304/8000-002 docx - Datei	2019 Jan 4	docx 22.7 kB	Download
ausschreiben.de 762-4304/8000-002		URL	Download

Tutorial

Establish connection to a controller using SSH	1.0	mp4	Download
In this video we are demonstrating how to establish a SSH connection with a controller using for example PuTTY to be able to work with the LINUX console. Contents: 0:21 Download and install the SSH client; 0:40 Establish the SSH connection; 0:50 Log on to the Controller	2017 Aug 5	29.0 MB	

System Description

Touch Panel 600, system description		pdf 513.5 kB	Download
-------------------------------------	--	-----------------	----------

Additional Information

WAGO OPC UA Server	V 1.1.0 2021 Jan 28	pdf 1.2 MB	Download
--------------------	------------------------	---------------	----------

Application Notes

Application Note e!COCKPIT

Application Note WAGO Visualization Datalogger (a2022005)	20240109	zip	Download
WAGO Visualization Datalogger is a Web application that can be used as a visualization tool for the recorded data of the datalogger library (WAGOAppDatalogger). WAGO Visualization Datalogger does not replace the datalogger but is rather a supplementary function. It is an HTML/Javascript application available via the Webserver on the controller. The user launches the Web application in a browser.	2024 Jan 9	3.9 MB	
e!COCKPIT Anwendungshinweis HVAC BACnet Macros (a2021010)	1.3.0	zip	Download
Basierend auf der Bibliothek WagoAppBuildingHVAC_BACnet stellt WAGO in dem Bereich Heizung, Lüftung und Klimatisierung verschieden HLK-Anlagenmakros mit BACnet-Anbindung zur Verfügung.	2023 Feb 27	69.2 MB	

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Engineering-Software

e!COCKPIT

e!COCKPIT	1.11.2.0	zip	Download
Register at no cost and test our engineering software for 30 days.	2023 Apr 24	4.1 GB	

WAGO Solution Builder

WAGO Solution Builder		URL	Download
-----------------------	--	-----	----------

WAGO Solution Builder is a software solution that enables holistic and efficient building automation project engineering and can be used throughout the entire building life cycle. With WAGO Solution Builder, you can organize all of your own building automation projects on a web interface and, thanks to integrated device management, ensure that your project-specific WAGO controllers are always updated.

Once downloaded, the software can be used for free during the launch phase until October 2023. After that, you can activate WAGO Solution Builder by purchasing a license key.

Configuration and Commissioning Software

WAGUpload	1.16.1.0	zip	Download
WAGUpload is a stand-alone PC software for transferring, backing up and restoring PLC applications on WAGO 750 Series controllers.	2022 Feb 2	12.4 MB	

Runtime Software

Firmware

TP 600 Codesys V3.5 Firmware	V 25	zip	Download
TP 600 Codesys V3.5 Firmware	2023 Jul 14	22 B	
Image Update (SD Karte) TP 600	V 22 SP1	zip	Download
WAGO_FW0762-4xxx_V031010_IX22_SP1_I	2022 Dec 14	220.8 MB	
WUP Update (WAGUpload Tool) TP 600	V 22 SP1	zip	Download
WAGO_FW0762-4xxx_V031010_IX22_SP1_W	2022 Dec 14	219.0 MB	

CAD/CAE-Data

CAD data

2D/3D Models 762-4304/8000-002	URL	Download
--------------------------------	-----	----------

CAE data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



ZUKEN Portal 762-4304/8000-002	URL	Download
EPLAN Data Portal 762-4304/8000-002	URL	Download
Asset Administration Shell		
Asset Administration Shell 762-4304/8000-002	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 762-4304/8000-002	URL	Download
Touch Panel 600; 25.7 cm (10.1""); 1280 x 800 pixels; 2 x ETHERNET, 2 x USB, CAN, DI /DO, RS-232/485, Audio; Control Panel		

Installation Notes

Product family

Standard Line
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!