


Data sheet | Item number: 787-1200

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage;
0.5 A output current; DC-OK LED

www.wago.com/787-1200

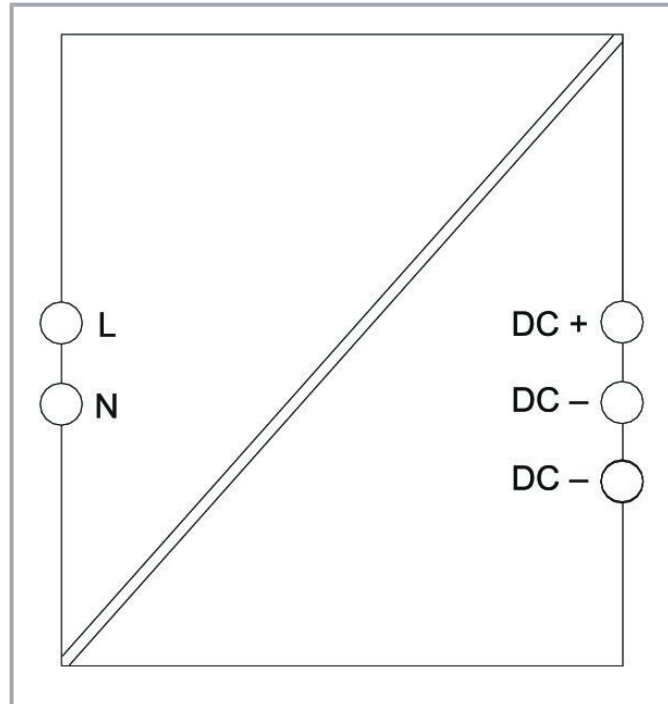

Item description

Features:

- Switched-mode power supply
- Stepped profile, ideal for distribution boards/boxes
- Pluggable *picoMAX*® Connection Technology (tool-free)
- Series operation

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Electrically isolated output voltage (SELV) per EN 62368/UL 62368 and EN 60335-1; PELV per EN 60204

Data

Technical data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V
Input voltage derating	-2 %/V (< 100 VAC)
Nominal mains frequency range	47 ... 63 Hz
Input current I_i	≤ 0.27 A (100 VAC; 0.5 ADC)
Inrush current	≤ 30 A (NTC)
Power factor	≥ 0.5
Power factor correction (PFC)	None
Mains failure hold-up time	≥ 100 ms (230 VAC)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Nominal output current $I_{o\text{ nom}}$	0.5 A
Nominal output power	12 W
Deviation	≤ 1 %
Deviation, dynamic load change 10 ... 90 %	≤ 1 %
Residual ripple	≤ 100 mV (peak-to-peak)
Overload behavior	shutdown and automatic restart in the event of a short circuit

Signaling and communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_i	≤ 0.2 W
Power loss (max.) $P_{i\text{ (max.)}}$	2.5 W (100 VAC / 24 VDC; 0.5 A)
Efficiency (typ.)	83 % (230 VAC; nominal load); 82 % (110 VAC; nominal load)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Circuit protection

Internal fuse	T 1 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher

Safety and protection

Protection class	II
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Yes
Overvoltage protection; secondary	≤ 31 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	Yes, for 2 devices of the same type
MTBF	> 700,000 h (per IEC 61709)

Connection data

Connection type 1	Input
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Connection type 2	Output
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	<i>picoMAX</i> ® 3.5 (WAGO 2091 Series)
Solid conductor 2	0.2 ... 1.5 mm² / 24 ... 14 AWG
Fine-stranded conductor 2	0.2 ... 1.5 mm² / 24 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches
Cable length (max.)	30 m

Subject to changes. Please also observe the further product documentation!



Physical data

Width	18 mm / 0.7 inches
Height	90 mm / 3.543 inches
Depth	55 mm / 2.165 inches
Depth from upper-edge of DIN-rail	52.5 mm / 2.067 inches

Mechanical Data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail Screw mount (back/side)

Material data

Flammability class per UL94	V2
Fire load	0.109 MJ
Weight	63 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	20 ... 90 % (no condensation permissible)
Derating	-2.6 %/K (> 55 °C)
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368 UL 62368 UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
Recupel Type	

Subject to changes. Please also observe the further product documentation!



PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143812184
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	d77ec3ad-d4ea-40c4-987e-5ae1218cbb93
SCIP notification number (Czech Republic)	0a095fbc-0aaf-4376-9f91-7363a8eac7f7

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B. 00089_19
	UL Underwriters Laboratories Inc.	UL 508	E255817
	UR Underwriters Laboratories Inc.	UL 62368-1	E255815

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Tool

Operating tool

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 2092-1630
Unlocking tool; orange

www.wago.com/2092-1630



Item no.: 210-769
SCREWDRIVER; green

www.wago.com/210-769



Item no.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720

Downloads

Documentation

Manual

Product Manual Power Supply 24 V	V 1.0.0	pdf 1.2 MB	Download
----------------------------------	---------	---------------	----------

Bid Text

787-1200 X81 - Datei	2019 Jun 24	xml 7.2 kB	Download
-------------------------	-------------	---------------	----------

787-1200 docx - Datei	2019 Jun 12	docx 20.8 kB	Download
--------------------------	-------------	-----------------	----------

ausschreiben.de 787-1200		URL	Download
--------------------------	--	-----	----------

Instruction Leaflet

Primär getaktete Stromversorgungen COMPACT DC 24 V, 0,5 A	V 2.0.0 2020 Nov 20	pdf 2.4 MB	Download
--	------------------------	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data

CAE data

ZUKEN Portal 787-1200	URL	Download
-----------------------	-----	----------

EPLAN Data Portal 787-1200	URL	Download
----------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!



CAD data

2D/3D Models 787-1200	URL	Download
Asset Administration Shell		
Asset Administration Shell 787-1200	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1200	URL	Download
Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 0.5 A output current; DC-OK LED		

Installation Notes

Product family

- EPSITRON COMPACT Power
- EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies
- [Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!